




DRUM ROUND

INSTALLATION TYPE:
(ACOUSTIC COLLECTION)

Installation Diagram

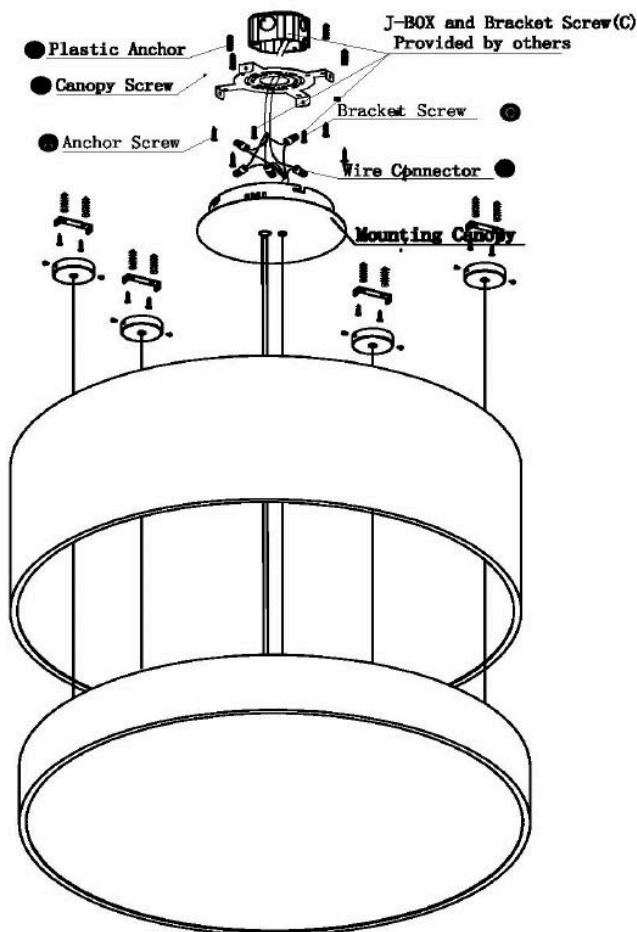

step 1

Shut "OFF" the electricity at main fuse box.

Place the wall switch in the "OFF" position of the room you are installing the fixture.

sales@gordonbullard.com

www.byiba.com

1 877-964-4646




991 South Gull Lake Dr.


Richland, MI 49083

USA

Tools You May Need

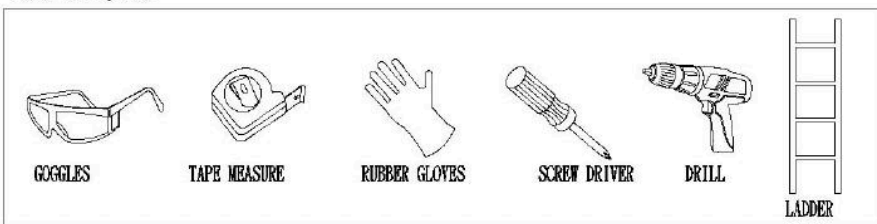


Circuit Box




Step2

Make point marks on the ceiling according to the Mounting pin and Canopy location.

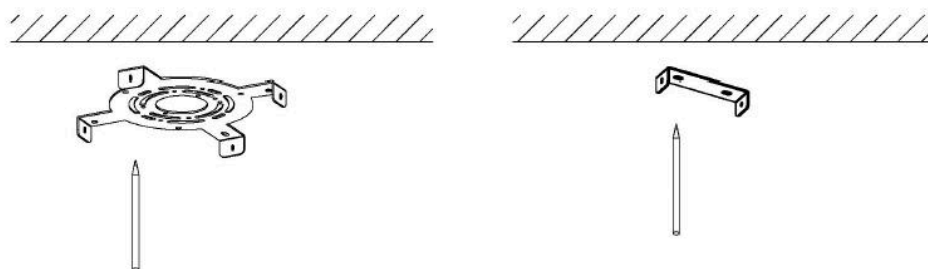

Step3

Take out Plastic Anchors, drill diameter **6mm** holes (Except Canopy position) on the ceiling according to the location mark as step2. Insert the Plastic Anchors into the holes. Then use M4*25 Self-Tapping Anchor Screws to fix Mounting Pin with ceiling.

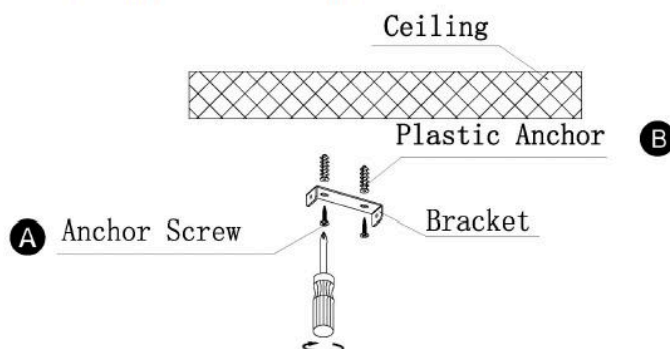

Step 4

Take out Plastic Anchors, drill 4 pcs diameter 6mm holes on the ceiling according to Mounting Bracket. Insert the Plastic Anchors into the holes. Use 2 pcs M4*25mm Bracket Screws to fix Mounting Bracket with J-Box, and Use 4 pcs M4*25 Self-Tapping Anchor Screws to fix Mounting Bracket on the ceiling. Refer to picture shown below.

NOTE: J-BOX used by Garvin 54171-S or equivalent and Bracket Screws provided by others.

sales@gordonbullard.com

www.byiba.com

1 877-964-4646




991 South Gull Lake Dr.

Richland, MI 49083


USA

Attention: Must secure mounting plate at all connection points to support fixture weight appropriately. Not using all mounting points could damage the fixture and void product warranty.

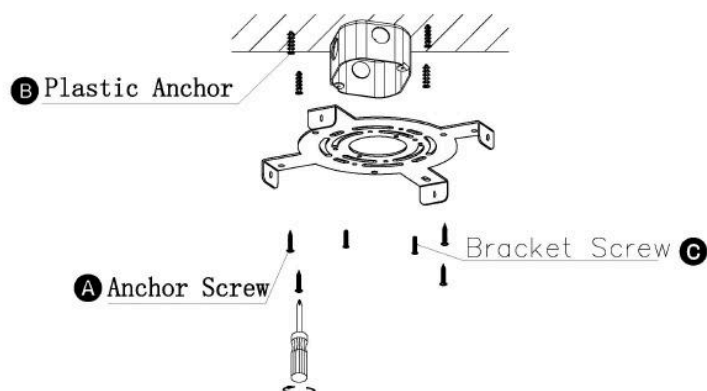

Step 5

Fix all the Lock Pin and Mounting Pins.

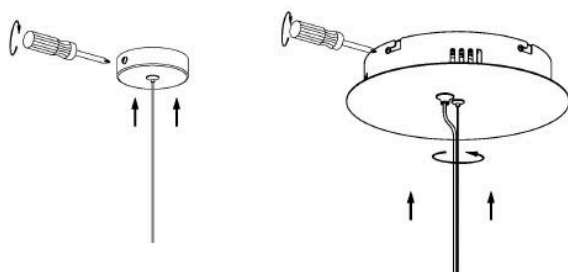

sales@gordonbullard.com

www.byiba.com


1 877-964-4646



991 South Gull Lake Dr.


Richland, MI 49083

USA

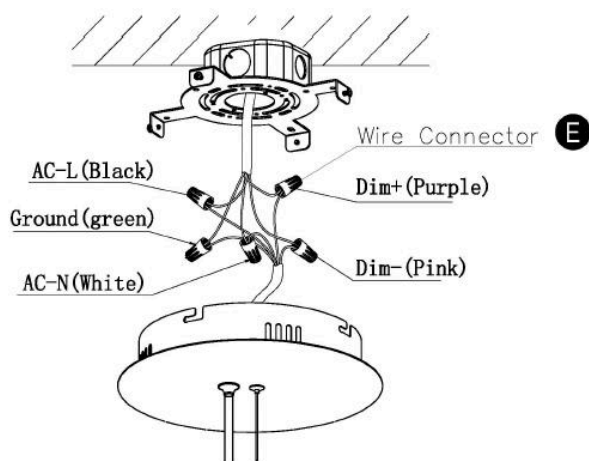


Step 7

Use Canopy Screw(D) to fix Mounting Canopy from side.

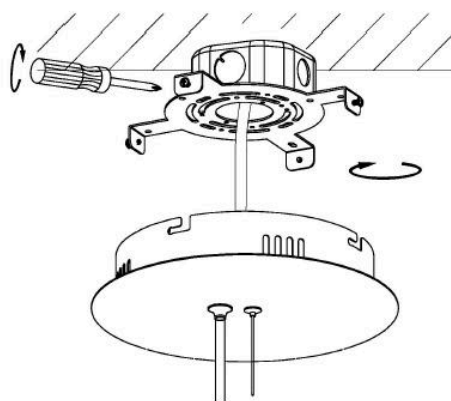

Step 8

Adjust the fixture power cable and aircraft cable length, use Screw to fix with Mounting Bracket and Mounting Canopy. Then loosen all the cables.

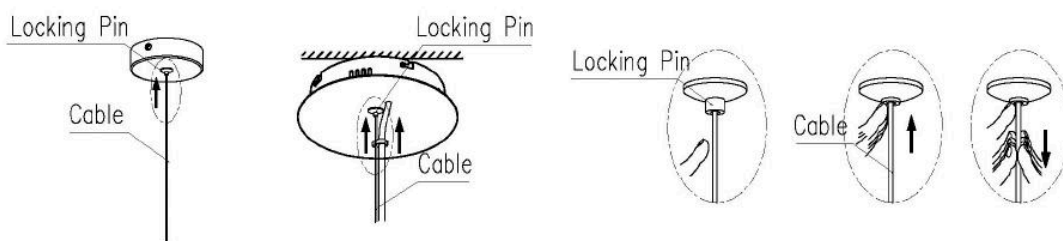

sales@gordonbullard.com

www.byiba.com

1 877-964-4646




991 South Gull Lake Dr.

Richland, MI 49083


USA

Step 9

After finish installation, turn on the electricity at main fuse box, the lighting works.

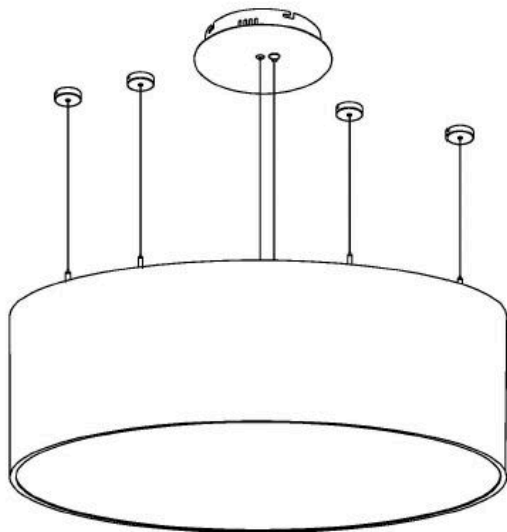

Circuit Box

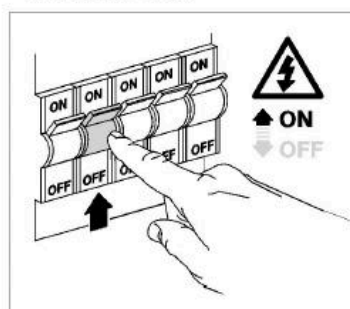

sales@gordonbullard.com

www.byiba.com

1 877-964-4646



991 South Gull Lake Dr.

Richland, MI 49083

USA



IMPORTANT

To ensure equipment safety you must carefully follow the instructions below. This leaflet must be kept handy by personnel entrusted with all ordinary and extraordinary maintenance.

- Before any installation or maintenance operation on the bulb, make sure it is disconnected from power
- Fit the correct bulbs, according to the type and power indicated on the lamp data label.
- Make sure the lamp technical features are compatible with the use you are going to make of it.
- Should you have any doubt, refer to the dealer or ask an electrician.
- When connecting to the mains, follow the correct colour code for power cables: (N) blue, (L) brown or black and, only for class I equipment, (T) yellow/green.
- When lamps are to be fitted to the wall directly through their ceramic parts, fasten the fixing screws lightly, to avoid breaking the ceramic.
- To clean the lamp on the outside, use a soft cloth, possibly wet. Do not use solvents or abrasive products. No liquid must get in contact with the lamp interior parts.
- Do not touch the equipment with dirty hands.



= Class I equipment, must be connected to an earth terminal.



= Double insulated lamp, does not need earthing.



= Electrical equipment in class III, electrical safety guaranteed by low voltage tension, does not require grounding



= Minimum distance to be observed from all lit up objects.



= Replace immediately the safety glass, if damaged, with the original part.



= The lamp uses low pressure bulbs, and needs no protection glass.



= The equipment at the end of its life must be collected separately from other waste.

sales@gordonbullard.com

www.byiba.com

1 877-964-4646



991 South Gull Lake Dr.

Richland, MI 49083

USA