



PROJECT

SPEC TYPE

NOTES

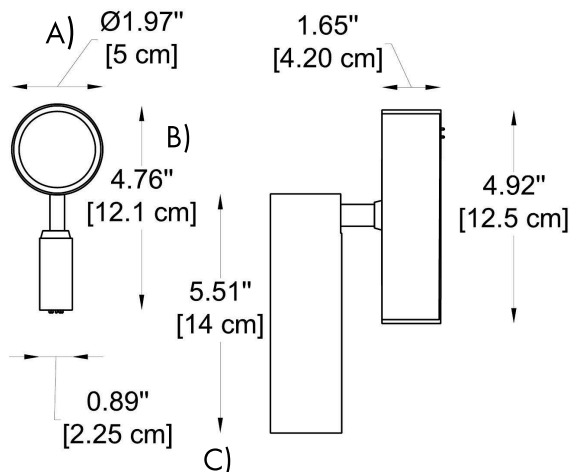

HOW TO ORDER:

Example:

CODE: -S50S-B18-K30-C80-WL-DIM

CODE:

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-S50S**

Dimensions: A) Diameter - 1.97" (5 cm)
B) Max. Height - 4.76" (12.1 cm)
C) Head Length - 5.51" (14 cm)

Material: Aliminum
Light Source: LED / 10W / 700 lm / 24Vdc
Lighting type: Direct
Lighting distribution: Symmetric
Optical type: Spot
Dimmable: Yes
Driver: Remote
Driver type: Electronic
Emergency: Without
Insulation class: III

Beam Angle: **-B18** - 18°
-B24 - 24°
-B36 - 36°

CCT: **-K27** 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options: **-DIM** - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com



1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

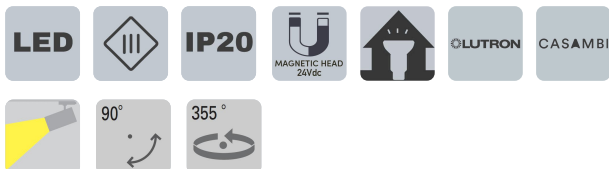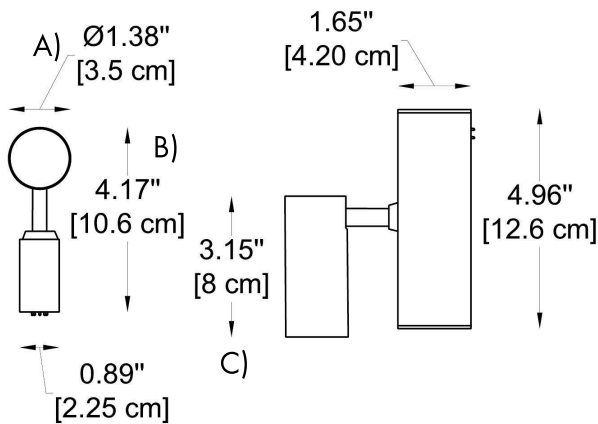

HOW TO ORDER:

Example:

CODE: -S50S-B18-K30-C80-WL-DIM

CODE:

6

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S35S

Dimensions:

A) Diameter - 1.38" (3.5 cm)
B) Max. Height - 4.17" (10.6 cm)
C) Head Length - 3.15" (8 cm)

Material:

Aluminum

Light Source:

LED / 5W / 378 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B20 - 20°
-B30 - 30°
-B40 - 40°
-B60 - 60°

CCT:

-K27 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/14/2026