




AIDEN (PENDANT LIGHTING)



The AIDEN pendant combines a slim cylindrical body with a refined architectural appearance. Its focused downward light makes it an excellent choice for counters, bedside areas, reception desks, and compact spaces. The understated form integrates easily into both minimalist and sophisticated interiors. AIDEN can be used as a single accent or grouped in a linear or clustered composition.



PROJECT SPEC TYPE NOTES		LIGHTING: LED
		VOLTAGE: 110-277V
		CONSTRUCTION MATERIAL: Aluminum
		EXTERNAL SCREWS: Stainless Steel A4
		FINISH AND PROTECTION: Primary treatment with nanoceramic conversion. Protection with textured polyester powder coating resistant to weathering and UV rays
		APPLIANCE CLASS: I
		IP RATING: IP65
		DRIVER POSITION: Integral
		CONTROL: ON-OFF
		CONTROL ON REQUEST: DALI
		CORD LENGTH: 98.43" (2.5m)
		BEAM DIRECTIONABILITY: Fixed optics
		DIFFUSER MATERIAL/FINISH: Tempered glass / Transparent - extra clear

LED

110-277V

Grounding symbol

IP65

House icon with lightning bolt

House icon with lightning bolt

Standard icon



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE


Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/23/2026



OPTICS:

Anti UV technopolymer lens

SECONDARY OPTICS:

Black anti UV technopolymer reflector

MAIN FEATURES:

-20 °C ÷ +35 °C Increased temperature to 50°C upon request previous specific components and test

PROJECT

SPEC TYPE

NOTES

LED

IP65



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE



Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/23/2026

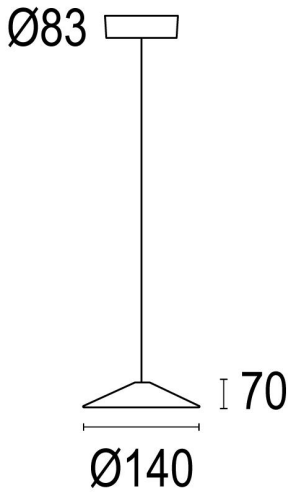

HOW TO ORDER:

Example:

CODE: BY-002029.CAGT-GH-B1-DIM-01-ED-25

BY-002029.CAGT
-GH-B1-DIM-01-
ED-25

1 DIMENSIONS:

Length - L: 3.94" (10 cm)
Width - W: 3.94" (10 cm)
Height - H: 23.62" (60 cm)

2 LIGHT SOURCE:

LED/1 x 12W/3000K/1379 lm/110-277V - 50/60 Hz

3 BEAM ANGLE:

-B1 16° Symmetrical medium flood (15 ° - 45 °)
-B2 36° Symmetrical medium flood (15 ° - 45 °)
-B3 53° Symmetrical medium flood (15 ° - 45 °)

4 DIMMING OPTIONS:

-DIM 0-10V
-DALI DALI
-NON Non-Dimmable

5 FINISH OPTIONS:

STANDARD FINISHES

-01 White matt
-02 Black matt

CUSTOM REQUEST FINISHES

-05 Anthracite grey(matt)
-26 Bronze
-19 Light grey(matt)
-45 Corten matt
-56 Gold
-62 Antique grey matt
-65 Blue matt
-80 Sand matt
-83 Green matt

6 ACCESSORIES:

-ED-25

DALI Optional

DALI



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646