




FLEX 360 R25 P (360 LED NEON FLEXIBLE)

The FLEX 360 FORM Collection is a premium round-profile LED neon flex delivering true 360° omnidirectional illumination with integrated shape-retention capability. Engineered with advanced silicone extrusion technology and an internal support structure, it can be bent and formed while maintaining the desired shape without continuous mounting supports. The seamless silicone housing ensures smooth, dot-free illumination with consistent brightness from every viewing angle. This poseable design allows the creation of suspended forms, curves, and three-dimensional lighting features for architectural and decorative applications. Designed for both indoor and outdoor use, the FLEX 360 FORM series features durable, UV-resistant silicone housing with high ingress protection ratings for long-term reliability. Available in multiple diameters and white light color temperatures, including 2300K, 2700K, 3000K, and 4000K.



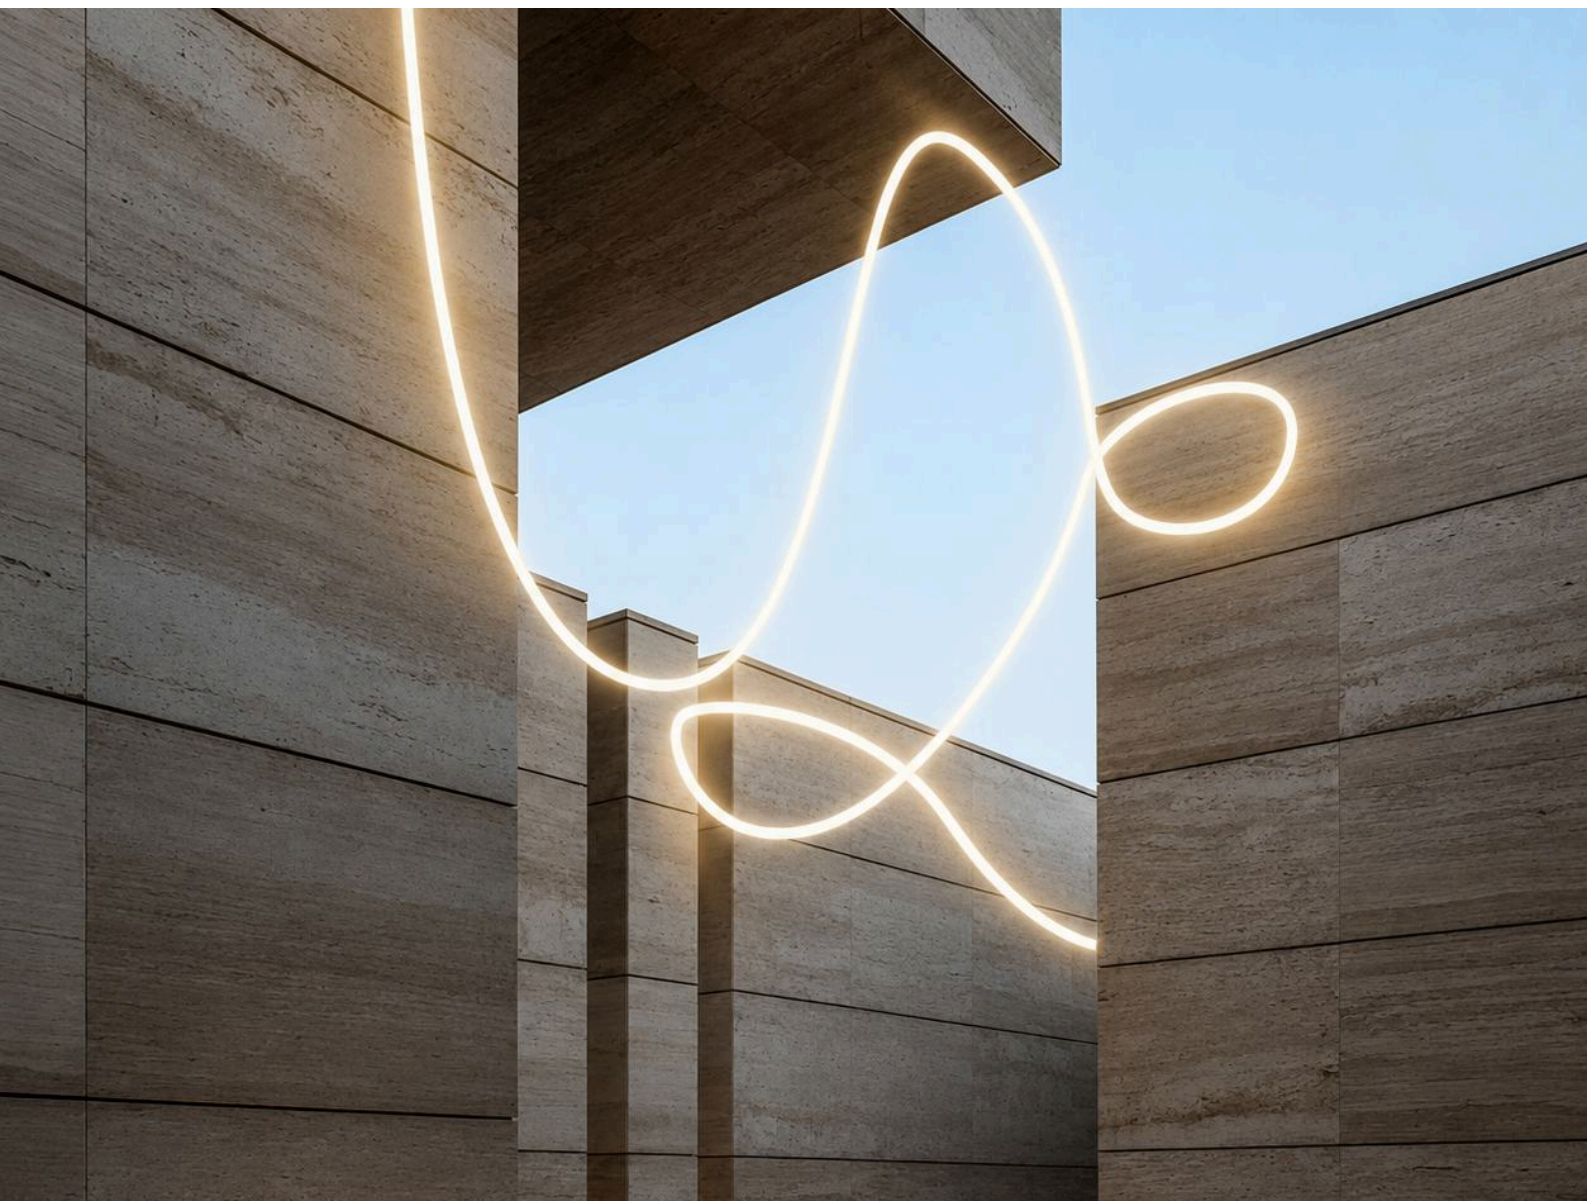

MATERIAL:

High Purity Silica Gel

IK RATING:

IK08

VOLTAGE:

48V DC / 24V DC

IP RATING:

IP65

DRIVER POSITION:

Remote

WARRANTY:

5 years

MAIN FEATURES:

Full colour RGBW

Functional and minimalistic design

Skin-friendly surface treatment

Operating Temperature: -13°F to +131°F.

PROJECT

SPEC TYPE

NOTES

LED

IP65



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026

HOW TO ORDER:

Example:

CODE: BY-FLXF360R25P-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-1FLXF360R25P-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-0
00000-00013

1 MODELS:

- A) Diameter - Ø: 0.98" (2.5 cm)


B) Length - L: 196.85" (500 cm)

2 LIGHT SOURCE:

CODE	INPUT VOLTAGE	CCT	RATED POWER	CRI	LUMENS	CUTTING
-LS1	24VDC	2300 K	20W (6.08W/ft)	90	920 (280/ft)	No cutting 1.16"
-LS2		2700 K			1100 (335/ft)	
-LS3		3000 K			1180 (359/ft)	
-LS4		4000 K			1140 (347/ft)	
-LSS1	48VDC	2300 K	20W (6.08W/ft)	90	760 (231/ft)	No cutting 1.31"
-LSS2		2700 K			930 (283/ft)	
-LSS3		3000 K			1000 (304/ft)	
-LSS4		4000 K			960 (292/ft)	


3 ENTRY CABLE:

-ECT



TOP

-ECS



SIDE

4 ACCESSORIES:



-AS-NNR25P1-25

R25 ceiling fixed installation
components




-AS-NNR25VCC1-XX-2

Double-ended vertical
ceiling
Kits

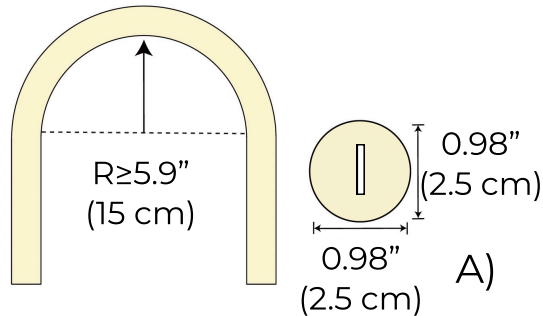

B)

196.85" (500 cm)

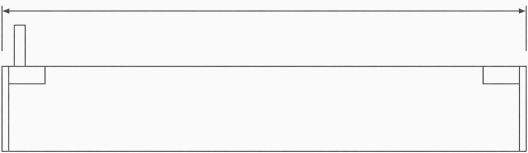

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646



PROJECT

SPEC TYPE

NOTES


HOW TO ORDER:
Example:
CODE: BY-FLXF360R25P-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-1FLXF360R25P-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-0
00000-00013

4 ACCESSORIES:


-AS-NNR25DHS-XX

Can be spliced
Install components




-AS-NNR25DHX-0038

Can be shaped and
hoisted
Install components



-AS-NNR25LHX-0038

Horizontal hoisting
Install components
(38mm)



AS-NNR25DHX-0080

Tail splicing piece (80mm) L: 0.6m



AS-NNR25LHX-0080

Tail splicing piece (80mm) L: 2m



-AS-NNR25VTD-XX-2

R25 Trimless embedded
accessory



-AS-NNR25VRD-XX-2

R25 Embedded accessory



-AS-NNR25LHS-0080

R25 No dark areas accessory



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026



PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-FLXF360R25P-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-1FLXF360R25P-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-0
00000-00013

4 ACCESSORIES:

-AS-NNR25GH0-EC

R25 Hole Diameter 4.5mm top
cap



-AS-NNR25GS0-EC

R25 Hole Diameter 4.5mm side
cap



5 SYSTEM CONTROL:

-402-02-000000-00001

Monochrome Remote Control
R6-1

Operating voltage: 3VDC(Battery CR2032)

Operating frequency: 2.4GHz

Remote control distance: 30m

Operating temperature: -30°C-55°C

Size:L107*W58.5*H9(mm)



-402-02-000000-00013

Monochrome Control Receiver
CR1-GBA

Input voltage: 12-48VDC

Maximum load current: 15A*1CH, Max15A@12/24V
10A *1CH, Max10A@36/48V

Maximum load power: 15A*1CH, Max15A@12/24V
10A *1CH, Max10A@36/48V

Operating temperature: -30°C-55°C

Size: L175*W45*H27(mm)



-402-0-000000-00013

Knob panel controller used for
dimming to warm
CP1-GBB

Input voltage: 12-24VDC

Input current: 6A*1CH

Operating temperature: -30°C-55°C

Size: L86*W86*H33(mm)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026