


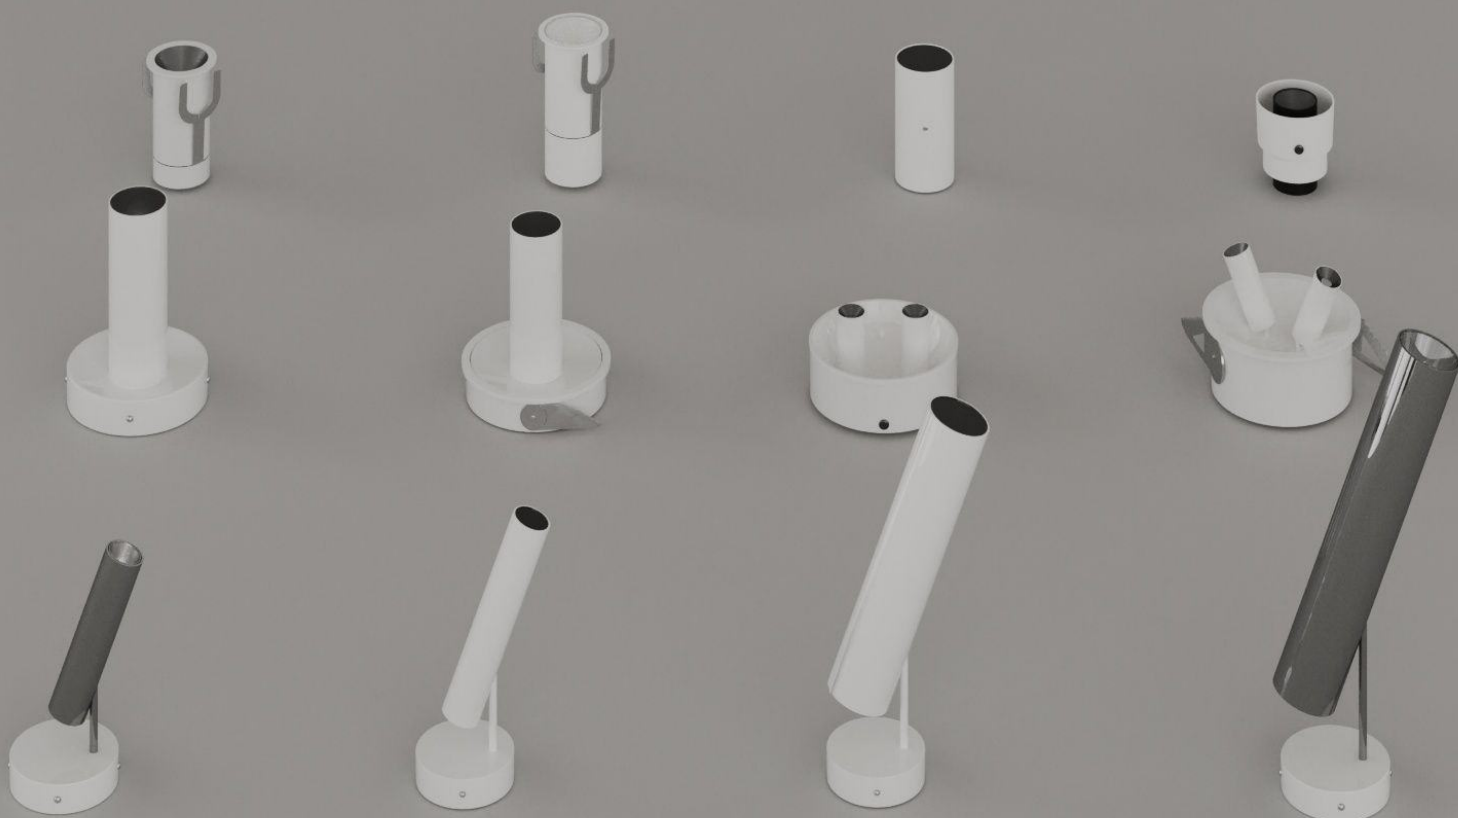

SUPER HERO (down-lights)

BY-SHR-DL

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

Introducing the SUPER HERO Downlight Series by BYIBA Light — a versatile and high-performance collection designed for modern architectural lighting. Crafted from durable aluminum and available in sleek white, black, or custom finishes, these LED downlights combine minimalist design with powerful functionality. With beam angles ranging from 10° to 36°, remote driver positioning, and an IP20 rating, the SUPER HERO series is ideal for precise, focused illumination in indoor environments. Compatible with 110–277V and built to perform in temperatures from -10°C to +45°C, this series meets Class I appliance standards and is perfect for residential, commercial, and custom lighting projects. Tailor your lighting with confidence — custom orders are welcome.

MATERIAL:

Aluminum

FINISHING:

White, Black, Custom on request*

LIGHTING:

LED

INPUT VOLTAGE:

110-277V

DRIVER POSITION:

Remote

BEAM ANGLE:

10° / 15° / 24° / 36°

IP RATING:

IP 20

OPERATING TEMPERATURE RANGE:

-10 to +45 C

APPLIANCE CLASS:

I

DRIVER POSITION:

Integral

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646


PROJECT

SPEC TYPE

NOTES



A) $\varnothing 1.69"$
[4.3 cm]

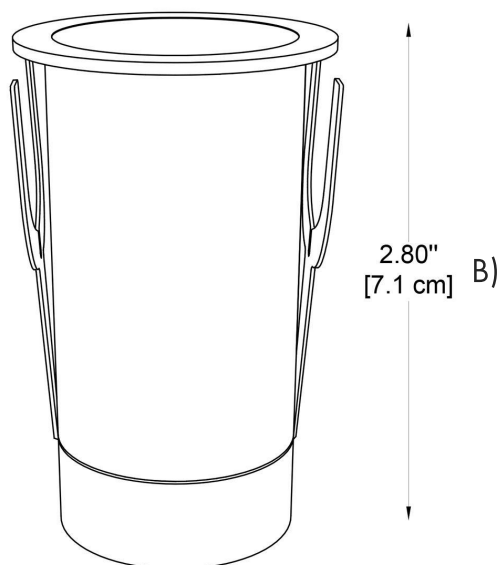

B) 2.80"
[7.1 cm]



HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - -ST-JGQ101-5

Dimensions: A) Diameter - $\varnothing 1.7"$ (4.3 cm)
B) Height - H: 2,8" (7.1 cm)

Power 5W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Intallation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

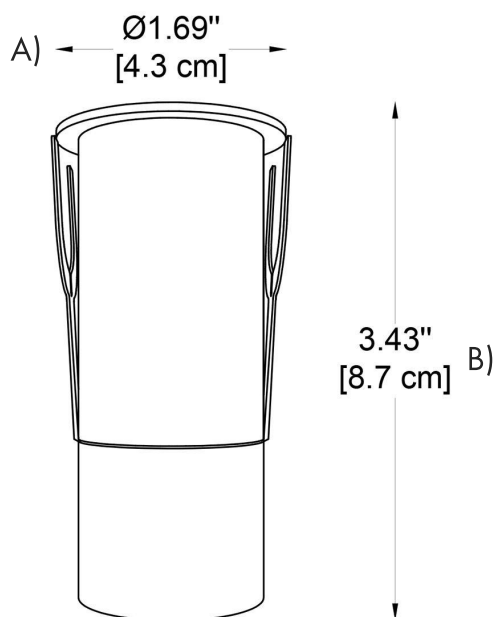

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - **-ST-JGQ101-7**

Dimensions: A) Diameter - Ø: 1.7" (4.3 cm)
B) Height - H: 3.43" (8.7 cm)

Power 7W

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: **-B10** 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: **-NON** Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: **-WH** White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Intallation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646


PROJECT

SPEC TYPE

NOTES



A) $\varnothing 1.44"$
[3.6 cm]

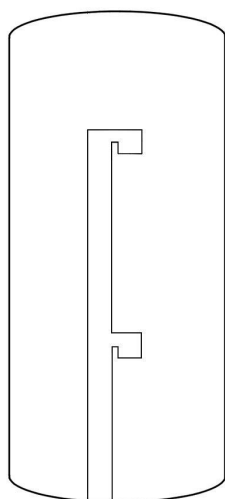

2.87" B)
[7.3 cm]



HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1

MODELS:

GENERAL INFORMATION

CODE - ST-JGQ101W-5

Dimensions: A) Diameter - $\varnothing$: 1.44" (3.6 cm)
B) Height - H: 2.87" (7.3 cm)

Power 5W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646


PROJECT

SPEC TYPE

NOTES



A) Ø1.44"
[3.6 cm]

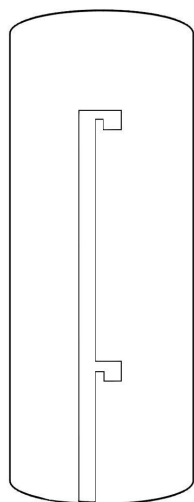

3.44"
[8.7 cm] B)

LED



IP20

CASAMBI

LUTRON

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1

MODELS:

GENERAL INFORMATION

CODE - ST-JGQ101W-7

Dimensions: A) Diameter - Ø: 1.44" (3.6 cm)
B) Height - H: 3.43" (8.7 cm)

Power 7W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20

Installation: Recessed

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

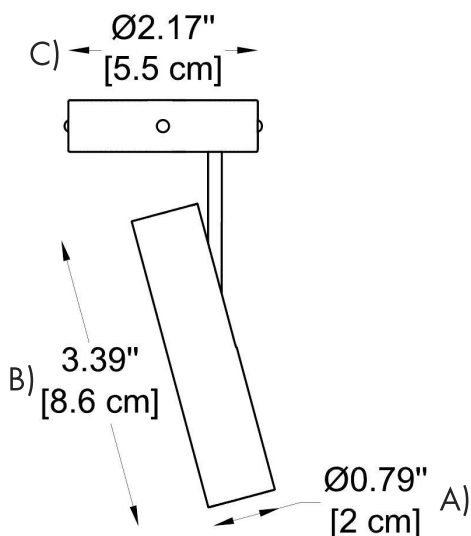

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 112

Dimensions: A) Diameter - Ø: 0.8" (2 cm)
B) Height - H: 3,4" (8.6 cm)
C) Canopy - Ø: 2.17" (5.5 cm)

Power 5W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Intallation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

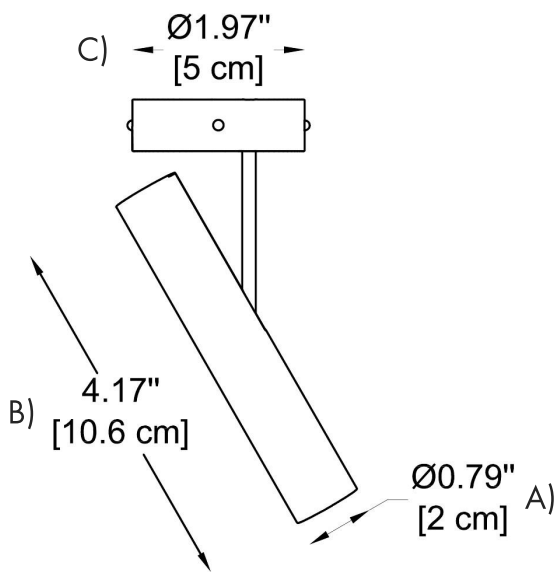

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 112W

Dimensions: A) Diameter - Ø: 0.8" (2 cm)
B) Height - H: 4.17" (10.6 cm)
C) Canopy - Ø: 2.17" (5.5 cm)

Power 5W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

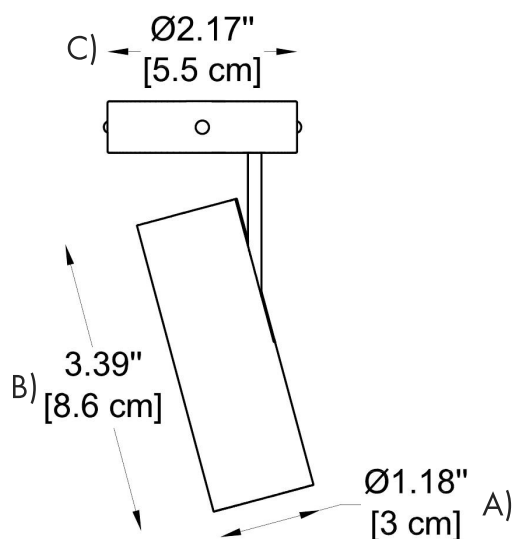

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 113

Dimensions: A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 3.4" (8.6 cm)
C) Canopy - Ø: 2.17" (5.5 cm)

Power 7W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

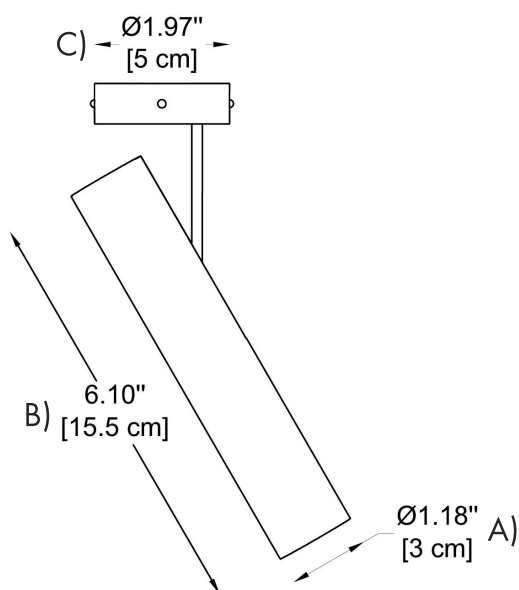

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 113W

Dimensions: A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 6.1" (15.5 cm)
C) Canopy - Ø: 2.17" (5.5 cm)

Power 7W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

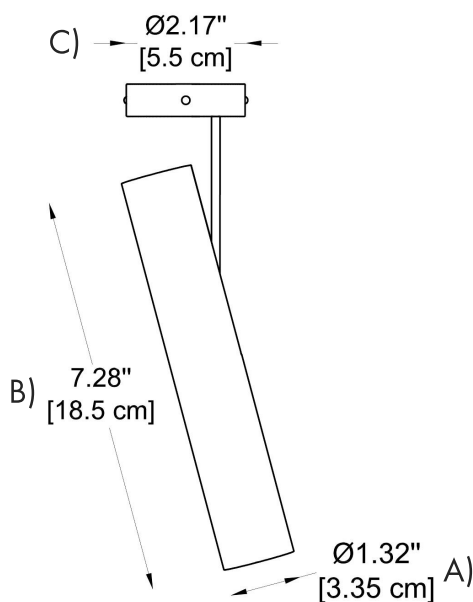

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1

MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 114

Dimensions: A) Diameter - Ø: 1.32" (3.35 cm)
B) Height - H: 7.3" (18.5 cm)
C) Canopy - Ø: 2.17" (5.5 cm)

Power 9W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

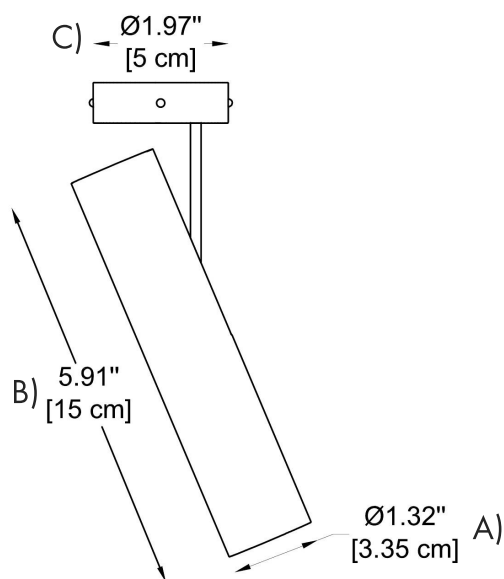

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 114W

Dimensions: A) Diameter - Ø: 1.32" (3.35 cm)
B) Height - H: 5.9" (15 cm)
C) Canopy - Ø: 2.17" (5.5 cm)

Power 9W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

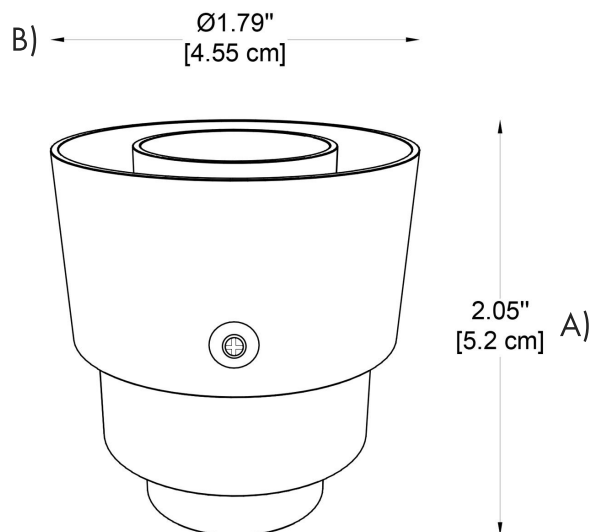

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1

MODELS:

GENERAL INFORMATION

CODE - ST-BW04W-3

Dimensions: A) Diameter - Ø: 1.8" (4.55 cm)
B) Height - H: 2.05" (5.2 cm)

Power 3W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: Adjustable 4-22°

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

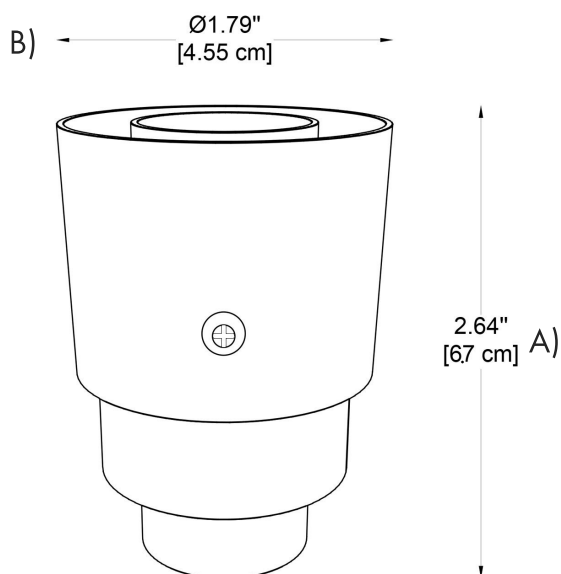

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-BW04W-3

Dimensions: A) Diameter - Ø: 1.8" (4.55 cm)
B) Height - H: 2.64" (6.7 cm)

Power 5W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: Adjustable 4-22°

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS



CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

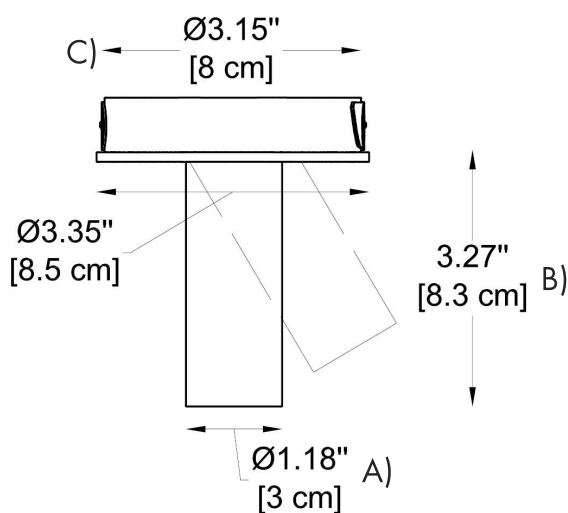

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 110

Dimensions: A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 3.27" (8.3 cm)
C) Canopy - Ø: 3.15" (8 cm)

Power 6W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20

Intallation: Recessed

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

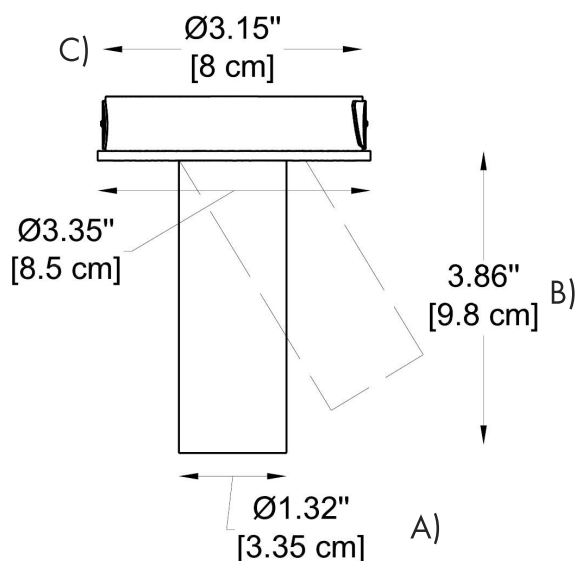

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ 111

Dimensions: A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 3.27" (9.8 cm)
C) Canopy - Ø: 3.15" (8 cm)

Power 9W

CCT: -K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: -B10 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: -NON Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: -WH White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

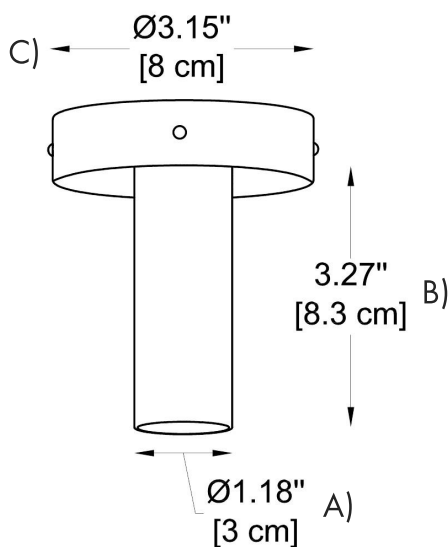

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1

MODELS:

GENERAL INFORMATION

CODE - **ST-JGQ110W**

Dimensions: A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 3.27" (8.3 cm)
C) Canopy - Ø: 3.15" (8 cm)

Power 6W

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: **-B10** 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: **-NON** Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: **-WH** White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

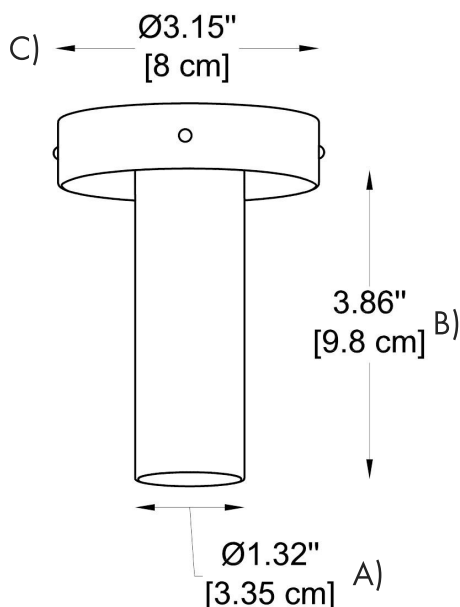

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - **ST-JGQ111W**

Dimensions: A) Diameter - Ø: 1.32" (3.35 cm)
B) Height - H: 3.86" (9.8 cm)
C) Canopy - Ø: 3.15" (8 cm)

Power 6W

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

Beam Angle: **-B10** 10° ☐
-B15 15° ☐
-B24 24° ☐
-B36 36° ☐

Dimming: **-NON** Non-Dimmable ☐
-DIM 0-10V ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Finish Options: **-WH** White ☐
-BL Black ☐
-GL Gold ☐
-CUS Custom on request ☐

IP rating: IP20
Installation: Recessed
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



A) $\varnothing 3.35"$
[8.5 cm]

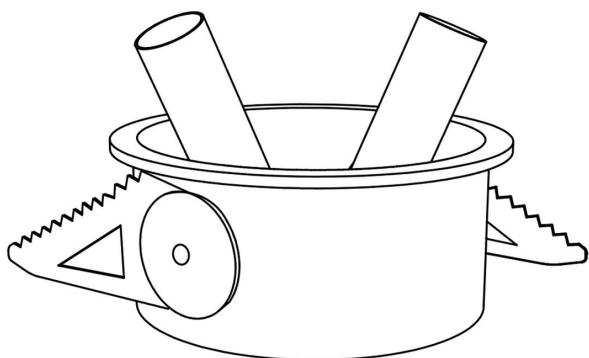

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ207W

Dimensions: A) Diameter - $\varnothing 3.35"$ (8.5 cm)

Power 9W

CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐

Beam Angle:	-B10	10°	☐
	-B15	15°	☐
	-B24	24°	☐
	-B36	36°	☐

Dimming:	-NON	Non-Dimmable	☐
	-DIM	0-10V	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐

Finish Options:	-WH	White	☐
	-BL	Black	☐
	-GL	Gold	☐
	-CUS	Custom on request	☐

IP rating: IP20

Intallation: Recessed

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

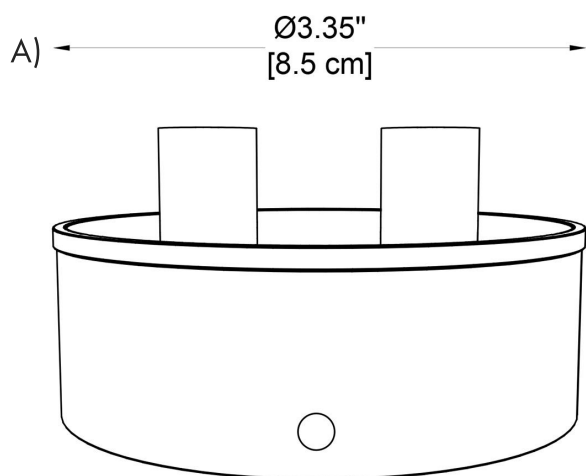

HOW TO ORDER:

Example:

CODE: BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

CODE:

BY-SHR-DL-ST-JGQ 101-5-K27-B10-DIM-WH

1 MODELS:

GENERAL INFORMATION

CODE - ST-JGQ207

Dimensions: A) Diameter - Ø:3.35" (8.5 cm)

Power 9W

CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐

Beam Angle:	-B10	10°	☐
	-B15	15°	☐
	-B24	24°	☐
	-B36	36°	☐

Dimming:	-NON	Non-Dimmable	☐
	-DIM	0-10V	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐

Finish Options:	-WH	White	☐
	-BL	Black	☐
	-GL	Gold	☐
	-CUS	Custom on request	☐

IP rating: IP20

Intallation: Recessed

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

DRIVER INFORMATION:

CASAMBI:



Control Features:

The CBU-A2D is a Bluetooth-enabled, Casambi-controllable device designed to control 0-10V and DALI interfaces. It allows control of one or two 0-10V LED drivers or tunable white LED drivers (with two 0-10V control interfaces) and can be configured for standalone DALI systems.

Input Voltage:

110-277V AC, 50-60Hz

Maximum Output:

Channel 1: 0-10V DC, max 7mA sinking or 12V DC, max 20mA for DALI

Channel 2: 0-10V DC, max 7mA sinking or 12V DC, max 100mA for relay control

Dimming Control:

Dimming can be achieved via the Casambi app or manually through a wall switch. The dimming level is adjustable by flicking the switch, which automatically saves the dim level.

Environmental Ratings:

Operating temperature: -20°C to +45°C

Storage temperature: -25°C to +70°C

Relative humidity: 0-80%, non-condensing

Physical Specs:

Dimensions: 76.0 x 26.0 x 23.0 mm

Weight: 40g

Protection: IP20 (indoor use only)

Wireless Range:


The wireless range can exceed 50m in open areas but may be significantly reduced when installed in metal structures.

Casambi Mesh Network:

Supports mesh networking with other Casambi devices, enabling scalability of lighting control systems.



Dimensions



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646