




MACARON (track head)

The Macaron Non-Magnetic Track collection features 1-Circuit and 3-Circuit track profiles in three lengths: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm), designed for a voltage range of 110-277V. Available in white or black finishes, the track profiles are made from aluminum (AL) with an electrostatic powder coating for durability.


This collection includes two spotlight models, each measuring Ø 4.53" (11.5 cm) x W 2.6" (6.6 cm), with wattage options of 18W or 27W. The spotlights offer CCT choices of 3000K or 4000K, CRI options of 80 or 90, and are available in white, black, or gray finishes.

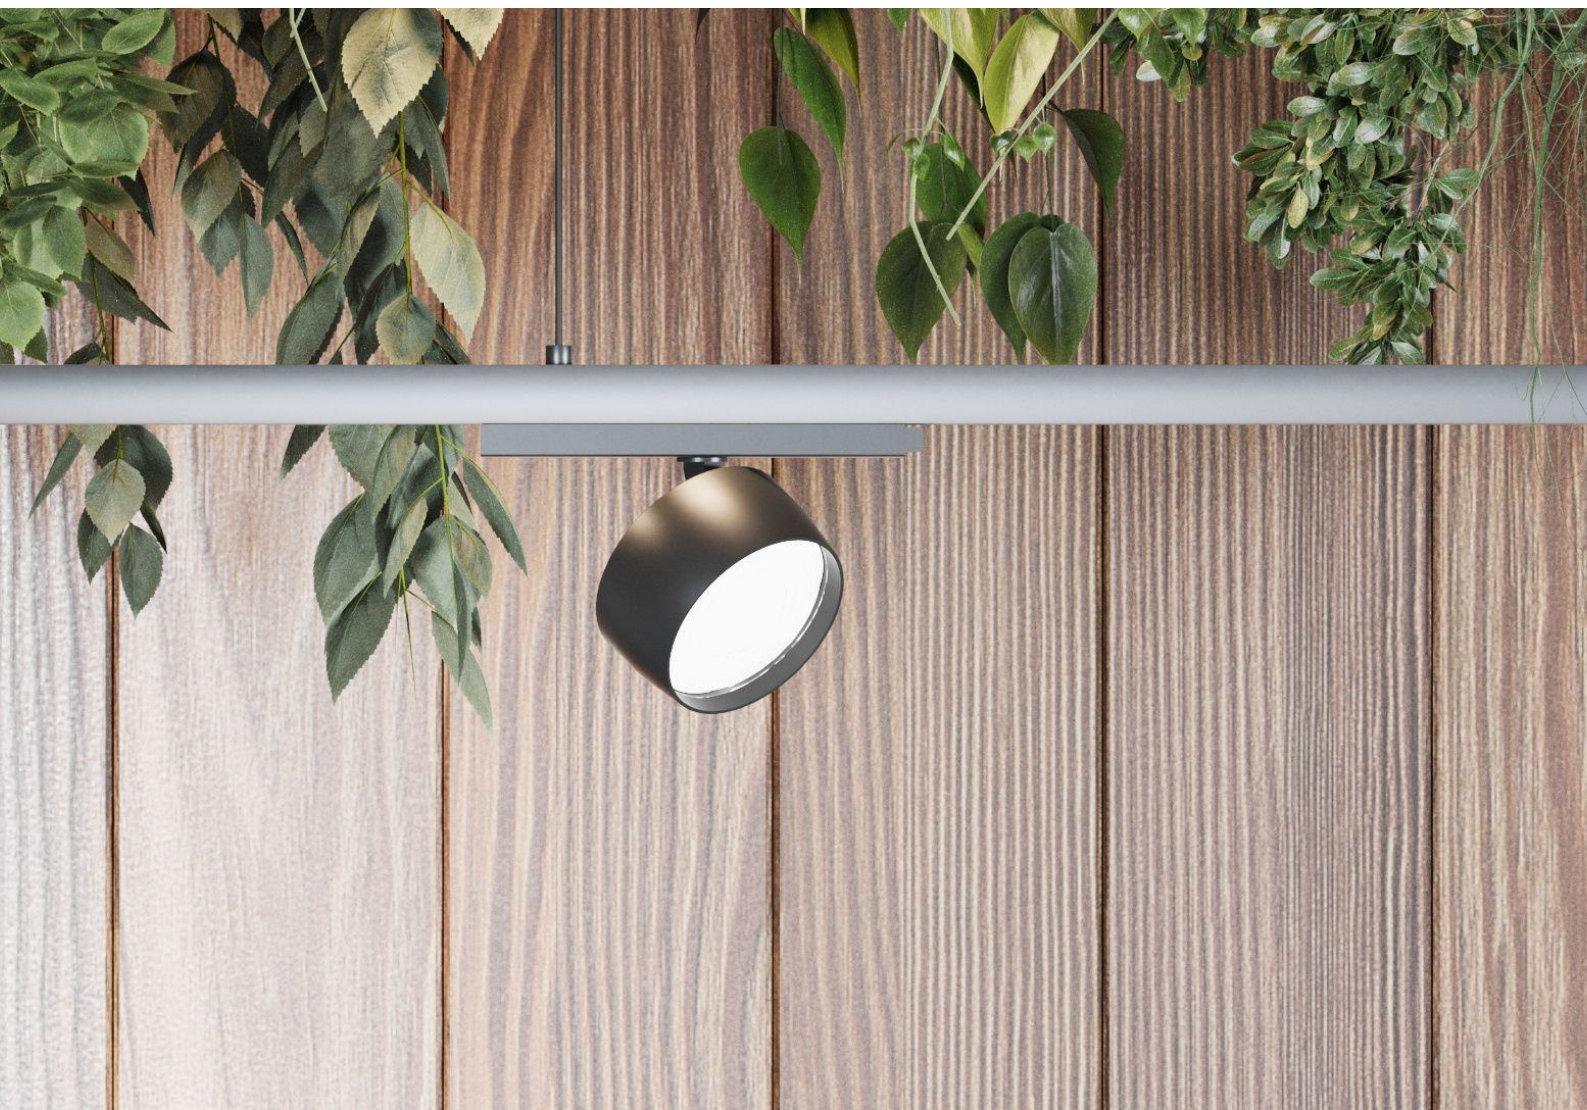

PROJECT

SPEC TYPE

NOTES

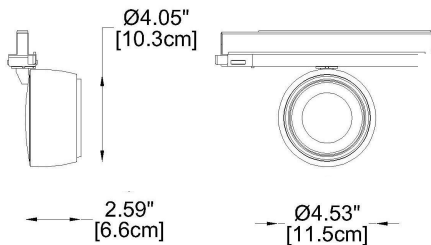

HOW TO ORDER:

Example:

CODE: BY-MCRN-TC-65380-K30-C80-B1-WL

CODE:

65380-K30-
C80-B1-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65380

Dimensions: Ø: 4.53" (11.5 cm) x W: 2.6" (6.6 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power: 18W

Output Current 500 mA

CCT: **-K30 - 3000K**

-K40 - 4000K

CRI: **-C80 - 80**

-C90 - 90

Beam Angle **-B1 - 17.8° = 1912 lm**

and lumens: **-B2 - 27.7° = 1907 lm**

-B3 - 43.8° = 2021 lm

Finish options: **-WL - White**

-BL - Black

-GR - Gray


Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C


PHOTOMETRICS:




Narrow



Medium



Wide



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

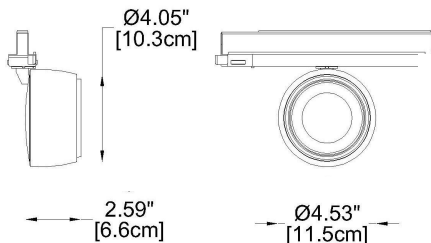

HOW TO ORDER:

Example:

CODE: BY-MCRN-TC-65380-K30-C80-B1-WL

CODE:

65380-K30-
C80-B1-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65381**

Dimensions: Ø: 4.53" (11.5 cm) x W: 2.6" (6.6 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power: 27W

Output Current 700 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle **-B1** - 18.2° = 2527 lm

and lumens: **-B2** - 27.7° = 2599 lm

-B3 - 43.4° = 2649 lm

Finish options: **-WL** - White


-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026