




SLASH (MODULAR CEILING SYSTEMS)

The Slash series features a clean linear profile that brings a refined architectural aesthetic to modern interiors. Designed for the BYIBA modular ceiling system, it provides precise directional illumination while maintaining a minimalist appearance. Its slim aluminum body integrates seamlessly into hospitality, retail, residential, and commercial environments. Available in multiple finishes and color temperatures, Slash delivers both visual comfort and contemporary style.



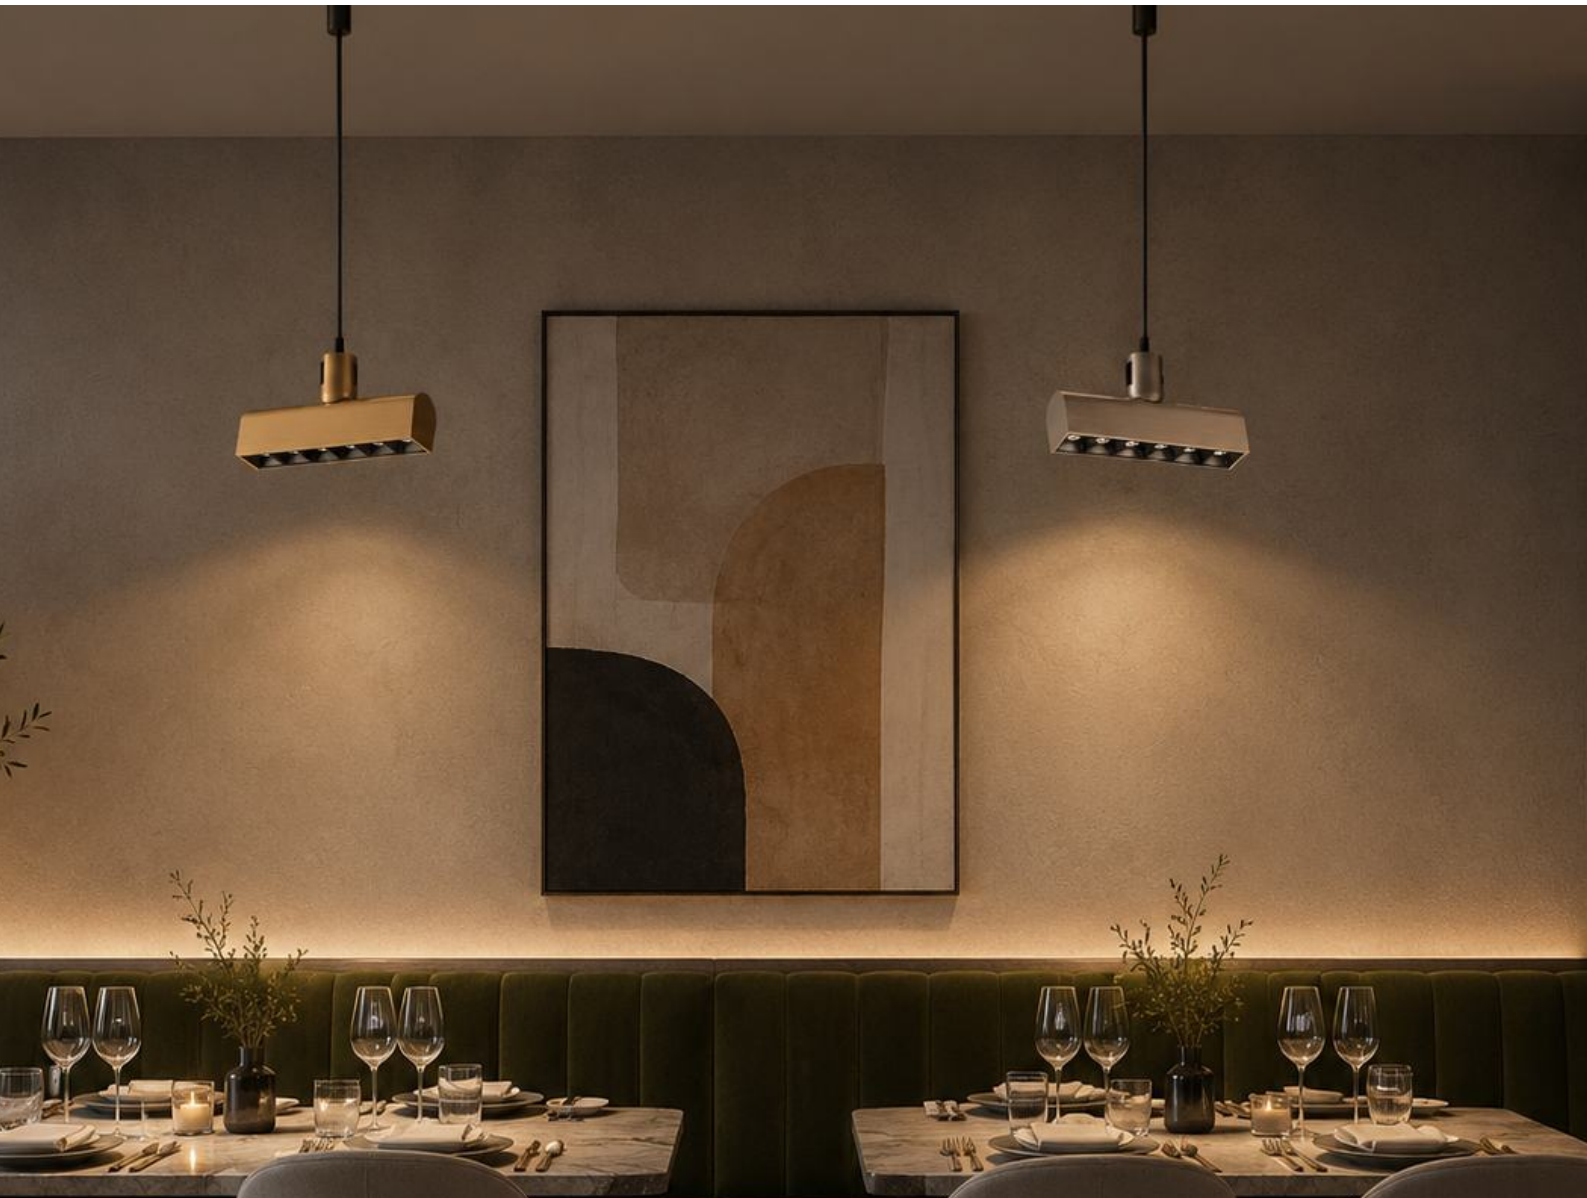

MATERIAL:

Aluminium®

LIGHTING:

LED: Osram SMD

VOLTAGE:

DC48V

IP RATING:

IP20

CRI:

CRI 90

APPLIANCE CLASS:

I

WARRANTY:

3 years

MAIN FEATURES:

High visual comfort
Wide range of finishes
Functional design
Minimal design

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE



Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/08/2026

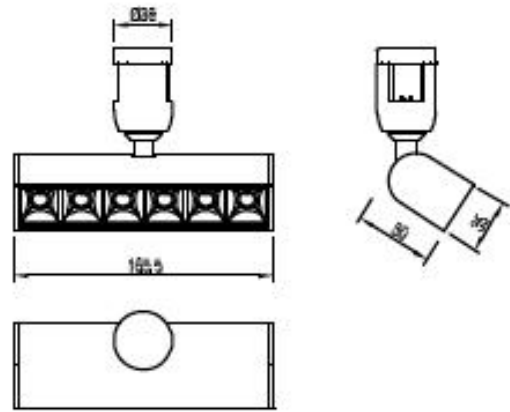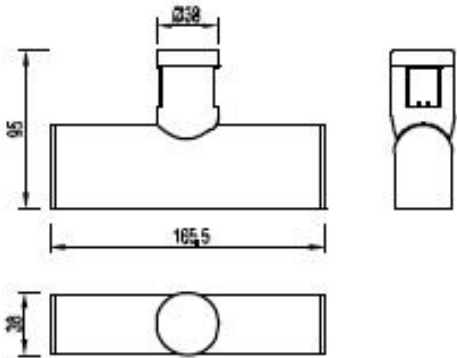

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:
Example:
CODE: BY-SLH-OS-S1-B12-K30-RG-DIM

BY-SLH-OS-S1-B12-K30-RG-DIM

1

MODELS:

-S1

Length - L: 6.52"(16.55cm)

Width - W: 1.50"(3.8 cm)

Height - H: 3.74"(9.5 cm)

2

LIGHT SOURCE:

LED / 8W / DC48V / CRI 90

3

BEAM ANGLE:

-B12

12°

-B34

34°

-B48

48°

4

CCT:

-K27

2700K

-K30

3000K

-K35

3500K

-K40

4000K

5

FINISH OPTIONS:

-RG

Rose Gold

-BB

Brushed Brass

-MW

Matte White

-BN

Brushed Nickel

-MB

Matte Black

-CUS

Custom on request

6

DIMMING OPTIONS:

-DIM

0-10V

-DALI

DALI

-NON

Non-Dimmable



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.