




PICO-S-F (BY-PC-S-F-RL) is a compact LED spotlight for highlighting jewelry, accessories, artwork, and retail displays. Designed for BYIBA's 17 mm track system, it combines 360° rotation and 45° tilt with a choice of 16°, 22°, 36°, or 29° × 57° beam distributions.

Its 2.7W LED delivers 210 lumens of warm 3000K light and operates on 24V DC with an external driver. The aluminum housing is available in black and anodized aluminum finishes.



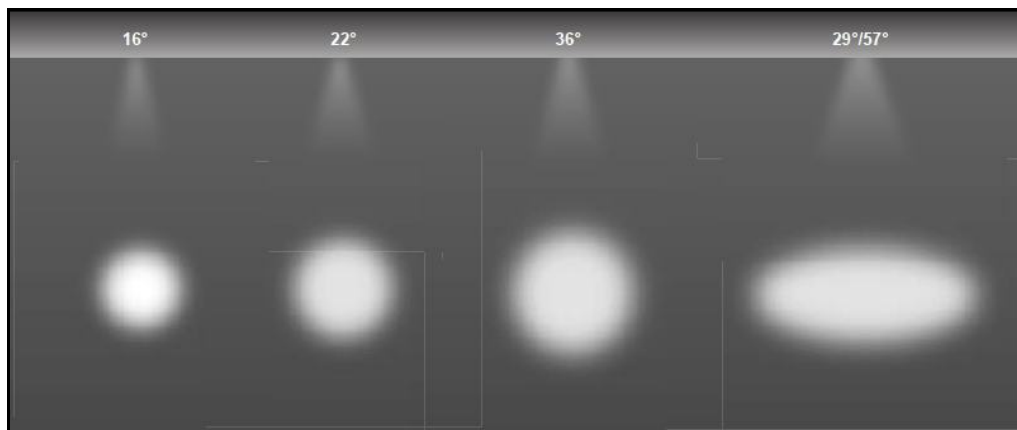

PROJECT

SPEC TYPE

NOTES

MATERIAL:

Aluminum

LIGHTING:

LED: HIGH POWER

VOLTAGE:

24V DC

IP RATING:

IP20

APPLIANCE CLASS:

III

CRI:

CRI 80

DRIVER POSITION:

External

ROTATE:

360°

WARRANTY:

5 years

CERTIFICATES:

ETL Listed(UL 2108 and CSA C22.2 No. 9.0)






WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.



Contact Us:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

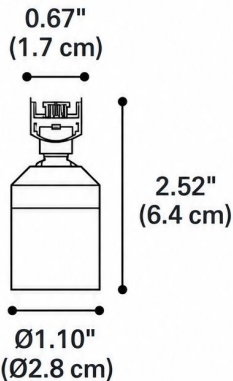

HOW TO ORDER:

Example:

CODE: BY-PC-S-F-RL-B3-BL

1 DIMENSIONS:

Diameter - Ø: 1.10" (2.8 cm)
Width - W: 0.67" (1.7 cm)
Height - H: 2.52" (6.4 mm)
Length - L: 2.36" (6 cm)

2 LIGHT SOURCE:

LED / 2.7W / 24V DC/ CRI 80 / 3000K /210 lm

3 BEAM ANGLE:

-B1 16°
-B2 22°
-B3 36°
-B4 29°x57°

4 FINISH OPTIONS:

-BL Black
-AAL Anodized Alum.

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.