



MINILED LINE (CEILING RECESSED)

The MINILED LINE is a sleek, recessed LED wall or ceiling fixture designed for modern architectural lighting applications. Its minimalist square profile and precise light emission make it ideal for accenting interiors with clean, focused illumination. Crafted from high-quality materials, it delivers consistent performance while blending seamlessly into contemporary spaces. With its refined finish and efficient LED technology, the MINILED LINE enhances both functional lighting and aesthetic appeal in residential or commercial settings.



	 	MATERIAL: CRISTALY® / ALUMITE® LIGHTING: LED VOLTAGE: 110-277V FINISHING: White (Paintable) White/ Black - Surface spotlight DRIVER POSITION: Remote IP RATING: IP20 APPLIANCE CLASS: III DRIVER POSITION: Remote WEIGHT: 1.76 lb ORIENTATION: 350° Rotation  350°
PROJECT		
SPEC TYPE		
NOTES		

LED

110-277V

IP20







STANDARD

CASAMBI





WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.


OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

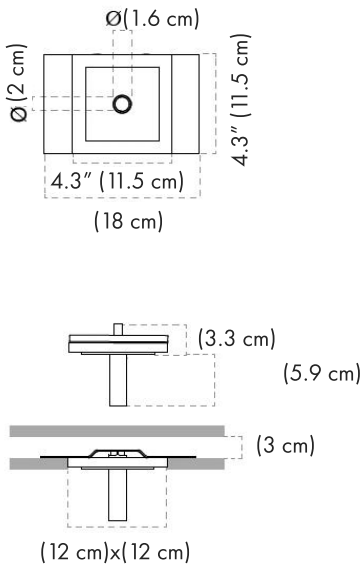

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE: BY-4253A-9010-L1-K27-DIM

BY-4253A-9010-
L1-K27-DIM

1 DIMENSIONS:

Height - H: 4.3" (11.5 cm)
Length - L: 7.09" (18 cm)
Depth - P: 1.18" (3 cm)
Diameter - Ø: 0.39" x 0.79" (1.6 cm x 2.0 cm)
Length of
spotlight - L: 2.32" (5.9 cm)

2 LIGHT SOURCE:

-L1 LED / 4W / 110-277V / CRI 90
-L2 LED / 6W / 110-277V / CRI 90


3 CCT&LUMENS:

-K27	2700K = 450 lm	} FOR L1 MODEL
-K30	3000K = 480 lm	
-K40	4000K = 510 lm	
-KK27	2700K = 630 lm	} FOR L2 MODEL
-KK30	3000K = 660 lm	
-KK40	4000K = 690 lm	

4 DIMMING OPTIONS:

-DIM 0-10V
-DALI DALI
-LT Lutron
-CS Casambi
-WF WI-FI
-NON Non-Dimmable

5 ACCESSORIES:



Housing Box
7.28" x 4.72" x 1.77"
8.46" x 5.91" x 2.17" - Hole



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646