




AI-PANEL (60° BEAM ANGLE PANEL LIGHT)



The AI-PANEL series introduces a precision-optic panel light that concentrates illumination into a controlled 60° beam, cutting glare at the source while boosting usable light on the work surface. Designed for the BYIBA modular ceiling system, its ultra-low UGR13 glare rating and Ra90 color rendering deliver superior visual comfort versus a standard 120° panel. Perfect for offices, libraries, schools, wellness centers, and R&D laboratories, sPanel transforms ordinary panel lighting into a precision instrument for demanding workspaces.



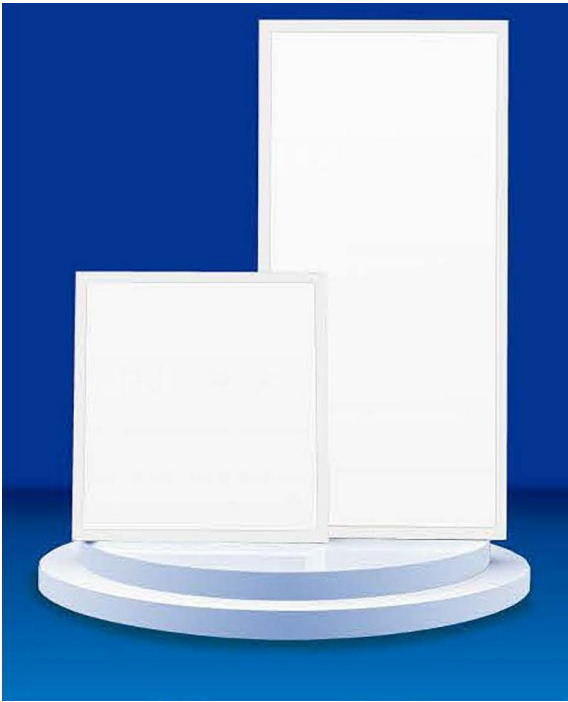

MATERIAL:

Aluminium + PC Diffuser

LIGHTING:

LED SMD

VOLTAGE:

110-277V

BEAM ANGLE:

60°

CRI:

CRI 90

APPLIANCE CLASS:

I

WARRANTY:

3 years

MAIN FEATURES:

Ultra-low glare, UGR13

Up to 550 lx @2m (High-Illumination)

Up to 3,440 lx @2m (Ultra-Illumination)

Recessed or suspended installation

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM






Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/08/2026

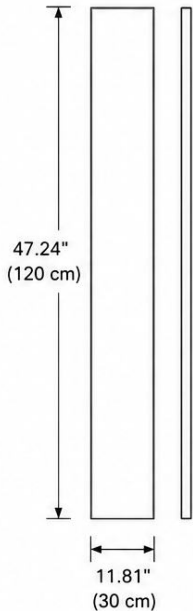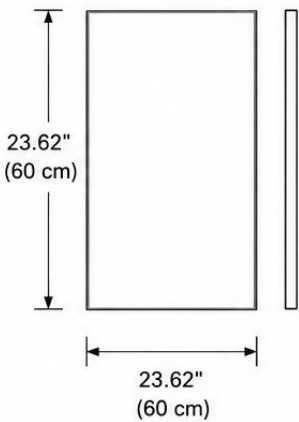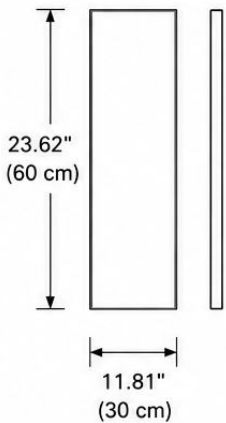

HOW TO ORDER:

Example:

CODE: BY-APNL-KR-3060-HI-K30-DIM-WH

BY-APNL-
KR-3060-HI-K30-
DIM-WH

1 MODELS:

-3060

Length - L: 11.81" (30 cm)

Height - H: 23.62" (60 cm)

LIGHT SOURCE:

LED / 36W(HI) / 60W (ULTRA) / 110-277V / CRI 90

-6060

Length - L: 23.62" (60 cm)

Height - H: 23.62" (60 cm)

LIGHT SOURCE:

LED / 36W(HI) / 60W (ULTRA) / 110-277V / CRI 90

-3120

Length - L: 11.81" (30 cm)

Height - H: 47.24" (120 cm)

LIGHT SOURCE:

LED / 72W(HI) / 120W (ULTRA) / 110-277V / CRI 90

-6120

Length - L: 23.62" (60 cm)

Height - H: 47.24" (120 cm)

LIGHT SOURCE:

LED / 72W(HI) / 120W (ULTRA) / 110-277V / CRI 90

-6240

Length - L: 23.62" (60 cm)

Height - H: 94.49" (240 cm)

LIGHT SOURCE:

LED / 144W(HI) / 240W (ULTRA) / 110-277V / CRI 90



WE WELCOME ALL CUSTOM ORDERS



Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

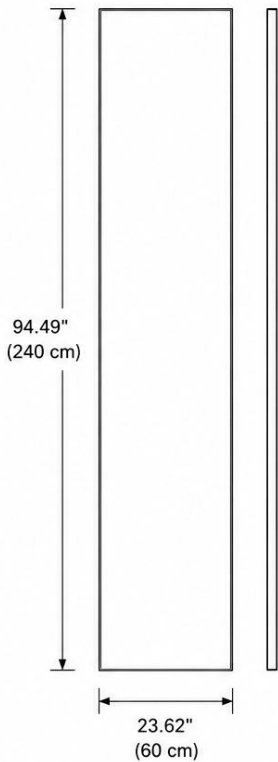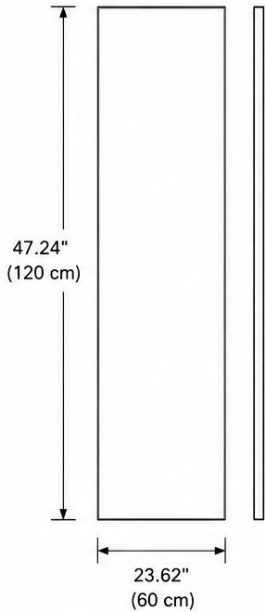

HOW TO ORDER:

Example:

CODE: BY-APNL-KR-3060-HI-K30-DIM-WH

BY-APNL-
KR-3060-HI-K30-
DIM-WH

2 ILLUMINATION TIER:

- HI** High-Illumination — UGR13, up to 1,040 lx @3m
-ULT Ultra-Illumination — UGR15, up to 1,680 lx @3m

3 CCT:

- K30** 3000K
-K40 4000K
-K60 6000K

4 DIMMING OPTIONS:

- DIM** 0-10V
-NON Non-Dimmable
-DALI DALI

5 FINISH OPTIONS:

- WH** White Aluminium Frame
-CUS Custom on request



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646