



AIRWAY (track head)

The AIRWAY Non-Magnetic Track system includes 1-Circuit and 3-Circuit track profiles, offered in three lengths: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Operating at 110-277V, the tracks are available in white or black finishes, crafted from aluminum with an electrostatic powder coating.


The system comes with two spotlight models: Ø 3.93" (10 cm) x H 3.97" (10.1 cm) and Ø 5" (12.7 cm) x H 3.97" (12.8 cm). These spotlights offer wattage options of 20W or 27W, with lens reflectors. Available in CCT options of 3000K and 4000K, they come with CRI choices of 80 or 90. The spotlights are available in white, black, or gray finishes.



PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

CODE:

Example:
CODE: BY-ARW-TC-65360-K30-C80-B1-WL

BY-ARW-TC-65360-K30-C80-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65360**

Dimensions: Ø: 3.93" (10 cm) x H: 3.97" (10.1 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power & Currents: 20W / 500 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle & lumens: **-B1** - 24.5° = 1844 lm

-B2 - 30.5° = 2169 lm

-B3 - 46.3° = 2212 lm

Finish Options: **-WL** - White


-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

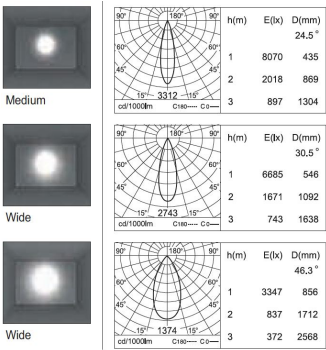



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE: BY-ARW-TC-65360-K30-C80-B1-WL

CODE:


BY-ARW-TC-65360-K30-C80-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65361
Dimensions:	Ø: 5" (12.7 cm) x H: 3.97" (12.8 cm)
Housing:	AL. Die-Casting, Electrostatic Powder Coating
Reflector:	Lens
Light Source:	LED (COB)
Power & Currents:	27W / 700 mA
CCT:	-K30 - 3000K -K40 - 4000K
CRI:	-C80 - 80 -C90 - 90
Beam Angle & lumens:	-B1 - 20° = 2993 lm -B2 - 30.7° = 3086 lm -B3 - 50.9° = 3119 lm
Finish Options:	-WL - White -BL - Black -GR - Gray
Operating temperature range	- -20 to +40°C
Maintenance of lumen	- L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

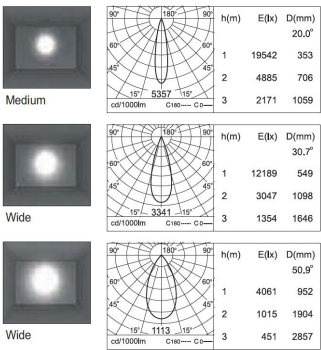

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.