




# ARCHO GENTILE

INSTALLATION TYPE:  
WALL RECESSED





|                                                                                   |             |                 |                                             |                                                                                   |                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------|-------------|-----------------|---------------------------------------------|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  |             |                 | <div>025.585</div> <div>MADE IN ITALY</div> |                                                                                   | <div>2485A 5,5W</div> <div>2485B 10,5W</div> <div>2485C 14,5W</div> <div>2486A 8W</div> <div>2486B 16W</div> <div>2486C 24W</div> <div>2486D 32W</div> <div>2486E 39W</div> <div>2486F 52W</div> |
|                                                                                   | C.V.<br>[V] | LED<br>110-277V |                                             |  | IP 20                                                                                                                                                                                            |

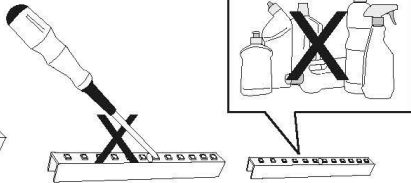
|       |                 |
|-------|-----------------|
| 2485A | 15.9" x 5.71"   |
| 2485B | 21.85" x 5.71"  |
| 2485C | 27.76" x 5.71"  |
| 2486A | 15.9" x 5.71"   |
| 2486B | 27.76" x 5.71"  |
| 2486C | (2x)5.51"x5.51" |
| 2486D | (2x)5.51"x5.51" |
| 2486E | (2x)5.51"x5.51" |
| 2486F | (2x)5.51"x5.51" |


1




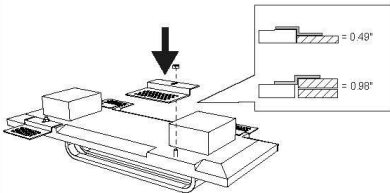


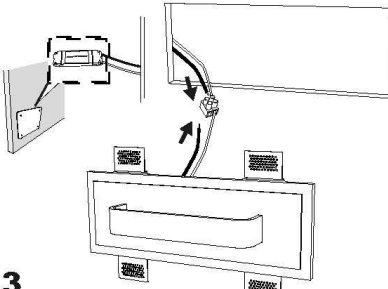
Terminal block is not included. For the installation qualified personnel may be required. (we recommend MAMMUT/ FORBOX 0.00233inF)









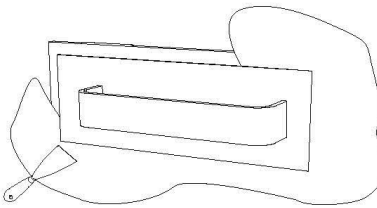





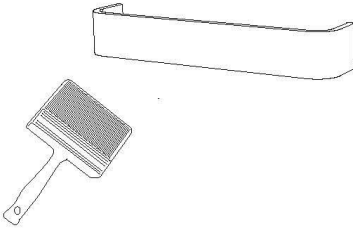



## IMPORTANT

To ensure equipment safety you must carefully follow the instructions below. This leaflet must be kept handy by personnel entrusted with all ordinary and extraordinary maintenance.

- Before any installation or maintenance operation on the bulb, make sure it is disconnected from power
- Fit the correct bulbs, according to the type and power indicated on the lamp data label.
- Make sure the lamp technical features are compatible with the use you are going to make of it.
- Should you have any doubt, refer to the dealer or ask an electrician.
- When connecting to the mains, follow the correct colour code for power cables: (N) blue, (L) brown or black and, only for class I equipment, (T) yellow/green.
- When lamps are to be fitted to the wall directly through their ceramic parts, fasten the fixing screws lightly, to avoid breaking the ceramic.
- To clean the lamp on the outside, use a soft cloth, possibly wet. Do not use solvents or abrasive products. No liquid must get in contact with the lamp interior parts.
- Do not touch the equipment with dirty hands.



= Class I equipment, must be connected to an earth terminal.



= Double insulated lamp, does not need earthing.



= Electrical equipment in class III, electrical safety guaranteed by low voltage tension, does not require grounding



= Minimum distance to be observed from all lit up objects.



= Replace immediately the safety glass, if damaged, with the original part.



= The lamp uses low pressure bulbs, and needs no protection glass.



= The equipment at the end of its life must be collected separately from other waste.