


NEON SPOTLIGHTS MODULES (magnetic track system)



PROJECT

SPEC TYPE

NOTES

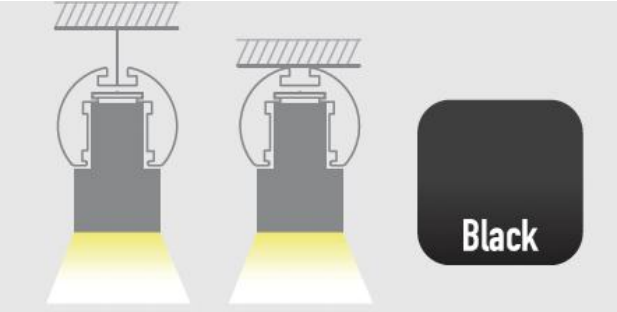

GENERAL INFORMATION:

Neon track is available as suspended and surface-mounted versions, the track can rotate horizontally, and the system also offers the option of different linear modules include diffuser, prismatic, in addition, spotlight, downlight and neon strip. These modules can be combined freely for different applications, at the same time, the track and the neon strip module can be creatively matched to achieve various rich stylings. The track system is operated with 48VDC, 1.18" (30 mm) diameter, small and exquisite.

MATERIAL:

Metal

FINISHING:

Black

LIGHTING:

LED

INPUT VOLTAGE:

48VDC

IP RATING:

20

MAXIMUM LOAD:

350W

PROFILES FINISH OPTION:

Black

MODULES FINISH OPTION:

Black

WWW.BYIBA.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

BY-NNSM-MTS-
SC-01-100P

1 INSTALLATION TYPE:


- SC Suspension with pendant cable
- SR Suspension with rod
- SM Surface-Mounted

2 DIMENSIONS:

- 01 A) Diameter - Ø: 1.20" (3 cm)
B) Length - H: 39.4" (100 cm)
- 02 A) Diameter - Ø: 1.20" (3 cm)
B) Length H: 78.7" (200 cm)
- 03 A) Diameter - Ø: 1.20" (3 cm)
B) Length H: 118" (300 cm)

3 POWER SUPPLY:

- 100P 100W
- 150P 150W
- 250P 250W

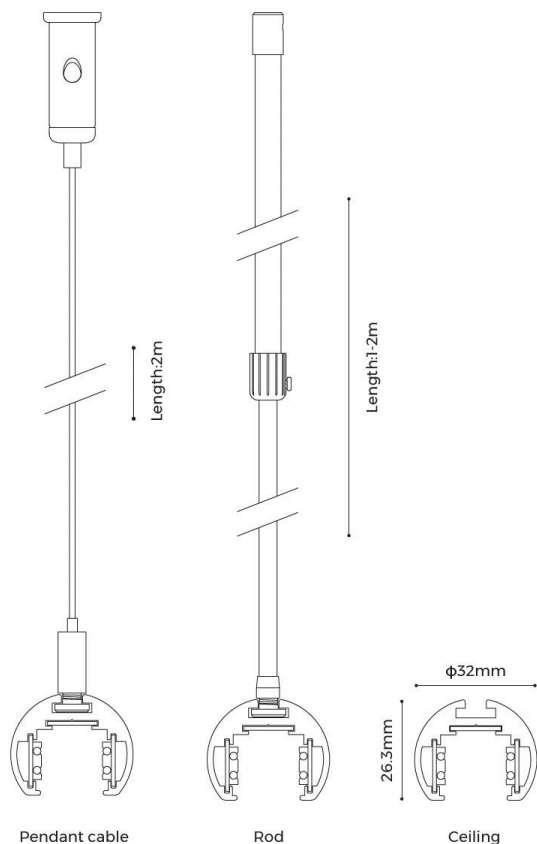

LED



IP20

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:


sales@gordonbullard.com

www.byiba.com

1 877-964-4646

SPOTLIGHTS MODULES

CODE:

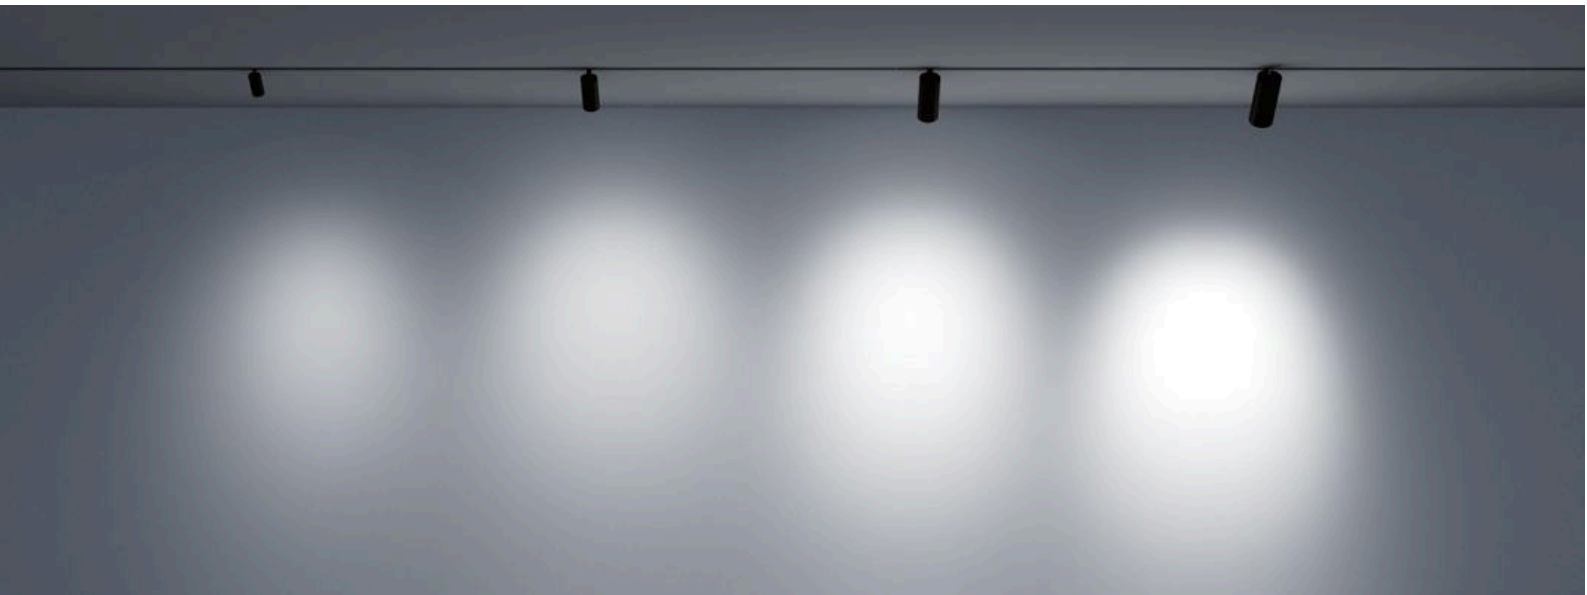

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

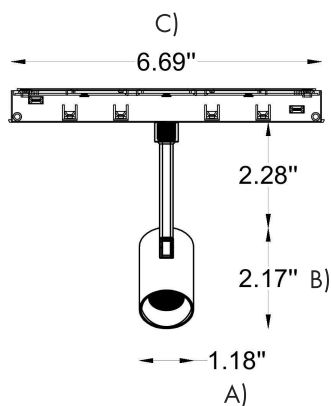

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20S-30**

Dimensions: A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 2.17" (5.5 cm)
C) Length - L: 6.7" (17 cm)

Diffuser: Lens
Luminous flux: 225 lm
Typ. power: 3W

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

CRI: >90

Beam Angle: **-B24** 24° ☐
-B36 36° ☐

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black
IP rating: IP20
Color tolerance: SDCM < 3 step
Installation: Track mounted
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

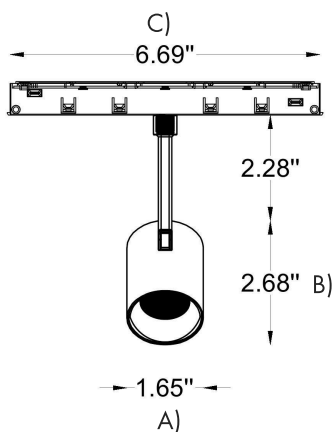

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20S-42**

Dimensions: A) Diameter - Ø: 1.65" (4.2 cm)
B) Height - H: 2.68" (6.8 cm)
C) Length - L: 6.7" (17 cm)

Diffuser: Lens
Luminous flux: 500 lm
Typ. power: 6W

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

CRI: >90

Beam Angle: **-B24** 24° ☐
-B36 36° ☐

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black
IP rating: IP20
Color tolerance: SDCM < 3 step
Installation: Track mounted
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

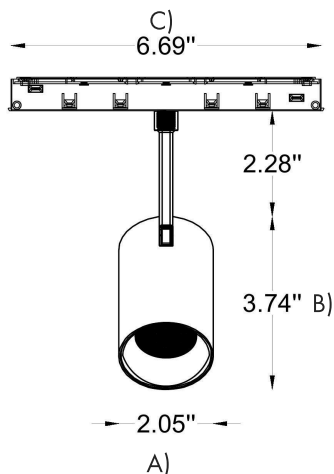

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20S-52

Dimensions:

A) Diameter - Ø: 2.05" (5.21 cm)

B) Height - H: 3.74" (9.5 cm)

C) Length - L: 6.7" (17 cm)

Diffuser:

Lens

Luminous flux:

820 lm

Typ. power

10W

CCT:

-K27

2700K



-K30

3000K



-K40

4000K



CRI:

>90

Beam Angle:

-B24

24°



-B36

36°



Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable



-DL

Dali



-LU

Lutron



-CA

Casambi



Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM < 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

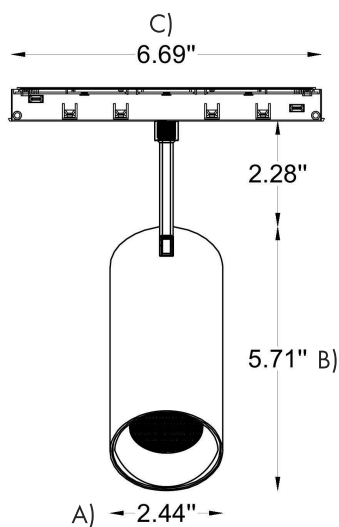

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20S-62**

Dimensions: A) Diameter - Ø: 2.44" (6.2 cm)
B) Height - H: 5.71" (14.5 cm)
C) Length - L: 6.7" (17 cm)

Diffuser: Lens
Luminous flux: 1200 lm
Typ. power: 15W

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

CRI: >90

Beam Angle: **-B15** 15° ☐
-B24 24° ☐
-B36 36° ☐

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black
IP rating: IP20
Color tolerance: SDCM < 5 step
Installation: Track mounted
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

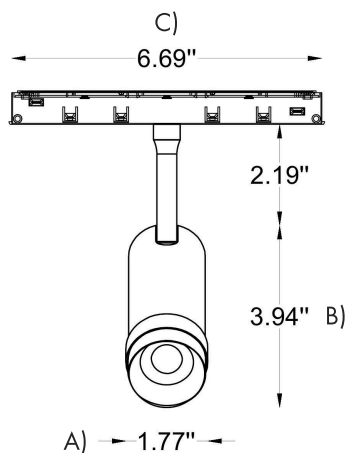

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20SZ-45**

Dimensions: A) Diameter - Ø: 1.77" (4.5 cm)
B) Height - H: 3.94" (10 cm)
C) Length - L: 6.7" (17 cm)

Diffuser: Lens

Luminous flux: 250 lm

Typ. power: 5W

CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐
	-K50	5000K	☐

CRI: >90

Beam Angle: 12° - 50° (zoom)

Input voltage: 48VDC

Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐

Coating: Black

IP rating: IP20

Color tolerance: SDCM < 3 step

Installation: Track mounted

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

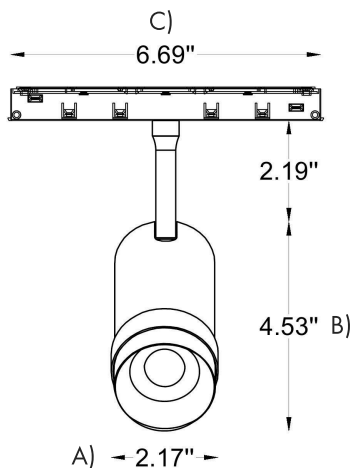

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20SZ-55**

Dimensions: A) Diameter - Ø: 2.17" (5.5 cm)
B) Height - H: 3.94" (11.53" cm)
C) Length - L: 6.7" (17 cm)

Diffuser: Lens
Luminous flux: 500 lm
Typ. power: 8W

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

CRI: >90

Beam Angle: 15° - 40° (zoom)

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black
IP rating: IP20
Color tolerance: SDCM < 3 step
Installation: Track mounted
Warranty: 3 years

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

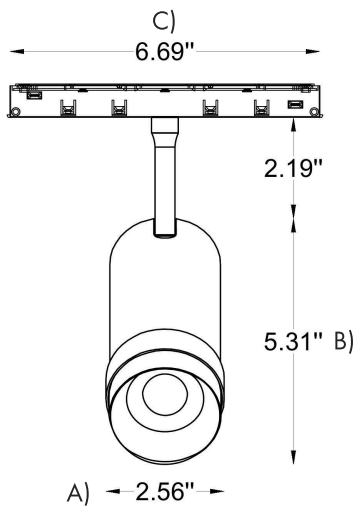

LED

48
VDC



IP20

CLUTRON

CASAMBI



90°

355°

HOW TO ORDER:

CODE:

Example:

CODE FOR TRACK: BY-NNSM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20S-30-K27-B24-LU

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

M20S-30-K27-
B24-LU

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20SZ-65

Dimensions:

A) Diameter - Ø: 2.17" (6.5 cm)
B) Height - H: 5.31" (13.5" cm)
C) Length - L: 6.7" (17 cm)

Diffuser:

Lens

Luminous flux:

700 lm

Typ. power

12W

CCT:

-K27 2700K ☐
-K30 3000K ☐
-K40 4000K ☐
-K50 5000K ☐

CRI:

>90

Beam Angle:

15° - 36° (zoom)

Input voltage:

48VDC

Dimming:

-NON Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM < 3 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

* Supports DALI individual control

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

ACCESSORIES:

-L90-MR20(A) L-shaped corner (Downward)	-L90N-MR20(A) L-shaped corner (Inward)	-L90-MR20(B) L-shaped corner (Downward)	-L90N-MR20(B) L-shaped corner (Inward)	-L90-MR20(C) L-shaped corner (Downward)
-L90N-MR20(C) L-shaped corner (Inward)	-L90-MS20 L-shaped corner (Downward)	-L90N-MS20 L-shaped corner (Inward)	-L90-MH20 L-shaped corner (Downward)	-L90N-MH20 L-shaped corner (Inward)
-L90-MH20(A) L-shaped Adjustable corner (Downward)	-T90-MH20(A) T-shaped Adjustable corner (Downward)	-X90-MH20(A) X-shaped Adjustable corner (Downward)		

HOW TO ORDER:

Example:

CODE: -L90MR20(A)-X90-MH20(A)

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

ACCESSORIES:

-PN-D Pendant cable (Track)	-TLS-R892 Pendant cable (Neon)	-PG-I Pendant rod (Track)	-TLS-R893 Pendant rod (Neon)	-CL-18 Ceiling accessories (Neon)
-CL-21 Ceiling screw (Track)	-TLS-R862(N) Power feeder of track	-TLS-R865 Female end cap	-TLS-R600 End cap	-TLS-R860 Turned connector
-TLS-R861 Straight connector (Without Wire locker)	-TLS-R863(N) I-shaped electrical connector 180° splicing bar	HOW TO ORDER: Example: CODE: PN-D-TLS-R893-CL21-TLS-R861		

NOTES

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
 1 877-964-4646

POWER SUPPLY:

-PN-D 100W Power supply 	-BN-V48-150P 150W Power supply 	-BN-V48-250P 250 Power supply 
---	---	--

HOW TO ORDER:

Example:
CODE: PN-D

NOTES

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646