




## QUATRO-S (track head)

The Quatro S Non-Magnetic Track system offers both 1-Circuit and 3-Circuit track profiles, available in lengths of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). It operates at 110-277V and is made from aluminum with an electrostatic powder coating, offered in white or black finishes.


The system includes one linear light model, measuring L: 18.5" (47 cm) x H: 4.72" (12 cm), with a power output of 36W and 2624 lm luminous flux. The light can be adjusted to a 90° or 45° angle, depending on the track profile. Available CCT options include 3000K, 4000K, and 5000K, with CRI options of 80 or 90. The light finishes are available in white, black, or gray.

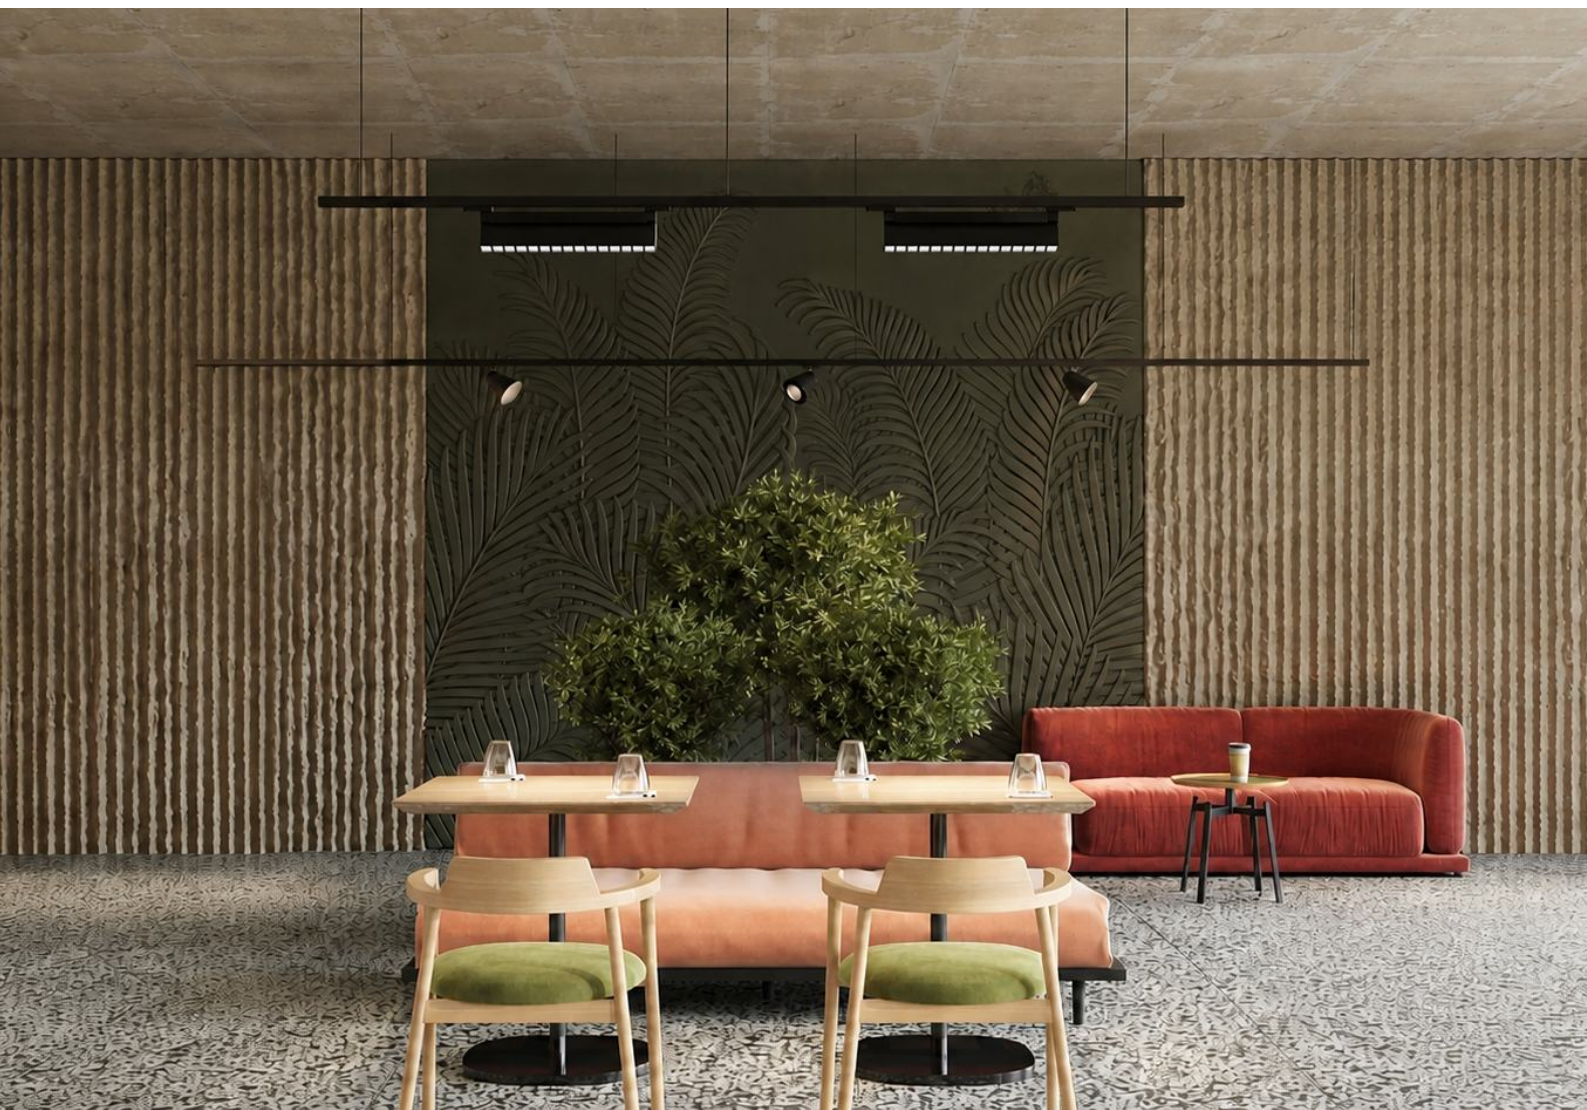

PROJECT

SPEC TYPE

NOTES

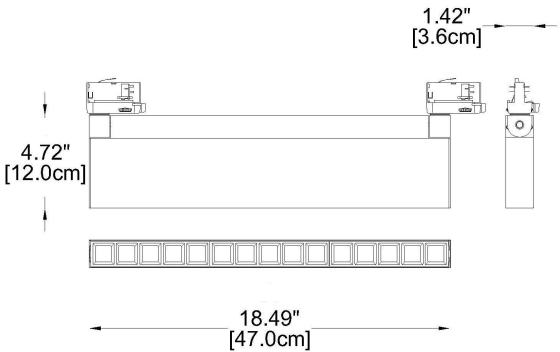

HOW TO ORDER:

Example:  
CODE: BY-QTR-TC-65510-K30-C80-WL

CODE:

BY-QTR-TC-65510-K30-C80-WL


3 CHOOSE TRACK HEAD:

GENERAL INFORMATION


|                 |                                           |
|-----------------|-------------------------------------------|
| CODE -          | -65510                                    |
| Dimensions:     | L: 18.5" (47 cm) x H: 4.72" (12 cm)       |
| Housing:        | AL. Extrude, Electrostatic Powder Coating |
| Reflector:      | Lens                                      |
| Gear Box:       | AL. Extrude, Electrostatic Powder Coating |
| Light Source:   | LED                                       |
| Power:          | 36W                                       |
| Currents:       | 700 mA                                    |
| Luminous Flux   | 2624 lm                                   |
| <hr/>           |                                           |
| CCT:            | -K30 - 3000K                              |
|                 | -K40 - 4000K                              |
|                 | -K50 - 5000K                              |
| <hr/>           |                                           |
| CRI:            | -C80 - 80                                 |
|                 | -C90 - 90                                 |
| <hr/>           |                                           |
| Finish Options: | -WL - White                               |
|                 | -BL - Black                               |
|                 | -GR - Gray                                |

ADJUSTABLE ANGLE:

2P (1 CIRCUIT TRACK)



4P (3 CIRCUIT TRACK)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:  
[sales@gordonbullard.com](mailto:sales@gordonbullard.com)  
[www.byiba.com](http://www.byiba.com)  
 1 877-964-4646  
 Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:  
CODE: BY-QTR-TC-65510-K30-C80-WL

CODE:

BY-QTR-  
TC-65510-  
K30-C80-WL

PHOTOMETRIC:

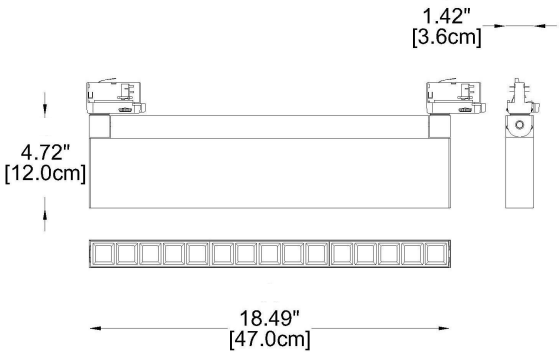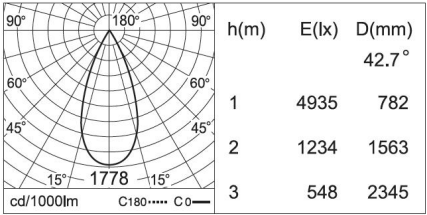

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com  
www.byiba.com  
1 877-964-4646