



AQUILA
(ceiling-mounted)

BY-4039B-PC

PROJECT

SPEC TYPE

NOTES



GENERAL INFORMATION:

The AQUILA by BYIBA is a versatile recessed lighting fixture crafted from CRISTALY®, a durable and paintable material. Designed for both ceiling and wall installations, it features a circular recess housing an adjustable light source that can be oriented up to 30° in any direction, providing adaptable illumination for various needs. The fixture is compatible with GU10 LED bulbs (up to 35W) or integrated LED modules offering color temperatures of 2700K, 3000K, or 4000K, ensuring energy-efficient and customizable lighting solutions. With a required drywall depth of approximately 5.7 inches and a cut-out size of approximately 10.4 x 10.4 inches, the AQUILA integrates seamlessly into interior spaces, embodying craftsmanship and design excellence by BYIBA.

MATERIAL:

CRISTALY®

FINISHING:

White

LIGHTING:

LED / GU 10

INPUT VOLTAGE:

110-277V / 110-120V

IP RATING:

IP20

DRIVER POSITION:

Remote

INSULATION CLASS:

II / III

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

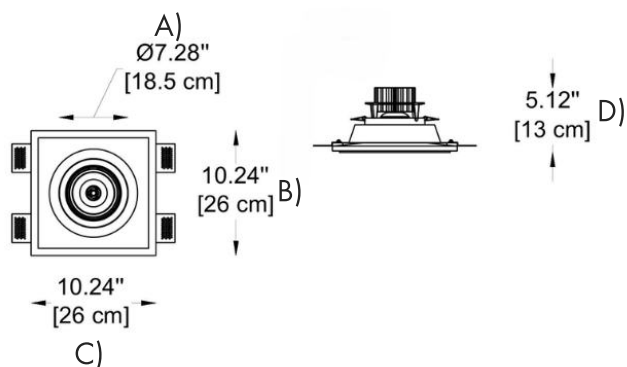

HOW TO ORDER:

CODE:

Example:

CODE: BY-4039B-PC-L1-K27-DIM

BY-4039B-PC-
L1-K27-DIM

1 DIMENSIONS:

A) Diameter Ø: 18.5" (18.5 cm)
B) Height - H: 10.24" (26 cm)
C) Length - L: 10.24" (26 cm)
D) Depth - P: 5.12" (13 cm)

2 LIGHT SOURCE:

-GU GU 10 / max. 35W / 110-120V
-L1 LED / 6,5W / 110-277V / CRI 90
-L2 LED / 13W / 110-277V / CRI 90

3 CCT and LUMENS:

-K27	2700K = 800 lm	} FOR L1 MODEL
-K30	3000K = 850 lm	
-K40	4000K = 900 lm	
-KK27	2700K = 1500 lm	} FOR L2 MODEL
-KK30	3000K = 1600 lm	
-KK40	4000K = 1700 lm	

4 DIMMING OPTIONS: (only for LED models)

-DIM 0-10V
-DALI DALI
-LT Lutron
-CS Casambi
-WF WI-FI
-NON Non-Dimmable



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646