



ROLL (track head)

The ROLL Non-Magnetic Track system is available in 1-Circuit and 3-Circuit track profiles, with lengths of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm), operating at 110-277V. The profiles are available in white or black finishes, constructed from aluminum with an electrostatic powder coating.

It includes three spotlight models with the following dimensions:

- Ø: 2.56" (6.5 cm) x H: 6.5" (16.5 cm)
- Ø: 2.6" (7.1 cm) x H: 7.24" (18.4 cm)
- Ø: 3.27" (8.3 cm) x H: 7.4" (18.8 cm)

The spotlights are available in wattages of 20W, 23W, 24W, 27W, and 36W, with aluminum anodized specular silver reflectors or lenses. They come in CCT options of 3000K and 4000K, with CRI ratings of 80 or 90. Finish options for the spotlights include white and black.




PROJECT

SPEC TYPE

NOTES



REFLECTOR

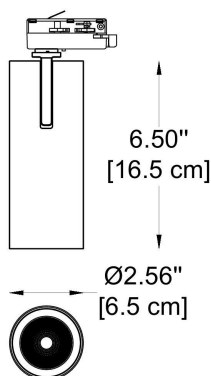

HOW TO ORDER:

Example:

CODE : BY-RLL-TC-65341-01-K30-C90-B1-WL

CODE:

BY-RLL-TC-65341-01-K30-C90-B1-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65341-01**

Dimensions: Ø: 2.56" (6.5 cm) x H: 6.5" (16.5 cm)
Housing: AL. Die-Casting, Electrostatic Powder Coating
Reflector: AL. Anodized Specular Silver
Light Source: LED (COB)
Power & Currents: 20W / 500 mA

CCT: **-K30** - 3000K
-K40 - 4000K


CRI: **-C80** - 80
-C90 - 90

Beam Angle & lumens: **-B1** - 15.8° = 2008 lm
-B2 - 28.1° = 1818 lm
-B3 - 40.0° = 1810 lm

Finish Options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

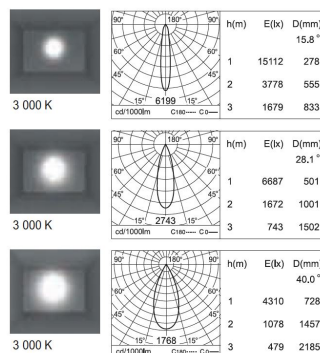

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026


PROJECT

SPEC TYPE

NOTES



LENS

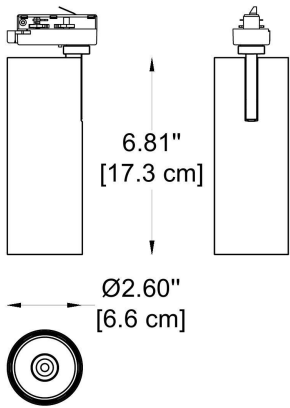

HOW TO ORDER:

CODE:

Example:
CODE : BY-RLL-TC-65341-01-K30-C90-B1-WL

BY-RLL-TC-65341-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65342-01

Dimensions:

Ø: 2.6" (6.6 cm) x H: 6.81" (17.3 cm)

Housing:

AL. Die-Casting, Electrostatic Powder Coating

Reflector:

LENS

Light Source:

LED (COB)

Power & Currents:

23W / 600 mA

CCT:

-K30 - 3000K

-K40 - 4000K

CRI:

-C80 - 80

-C90 - 90

Beam Angle & lumens:

-B1 - 26.2° = 2378 lm

-B2 - 34.6° = 2332 lm

-B3 - 48.9° = 2502 lm

Finish Options:

-WL - White

-BL - Black


Operating temperature range -

-20 to +40°C

Maintenance of lumen - L80 -

50 000 hours at 25 °C

PHOTOMETRICS:

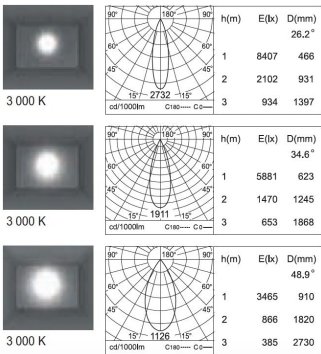

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR TECHNICAL DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE : BY-RLL-TC-65341-01-K30-C90-B1-WL

CODE:
BY-RLL-TC-65341-01-K30-C90-B1-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65370-05
Dimensions:	Ø: 2.6" (7.1 cm) x H: 7.24" (18.4 cm)
Housing:	AL. Die-Casting, Electrostatic Powder Coating
Reflector:	LENS
Light Source:	LED (COB)
Power & Currents:	24W / 600 mA

CCT:	-K30 - 3000K
	-K40 - 4000K


CRI:	-C80 - 80
	-C90 - 90

Beam Angle & lumens:	-B1 - 23.5° = 2610 lm
	-B2 - 31.0° = 2623 lm
	-B3 - 47.2° = 2675 lm

Finish Options:	-WL - White
	-BL - Black

Operating temperature range -	-20 to +40°C
Maintenance of lumen - L80 -	50 000 hours at 25 °C

PHOTOMETRICS:

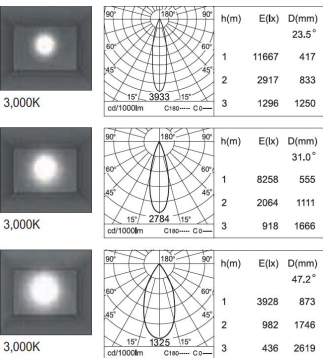

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL


DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
 1 877-964-4646
 Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

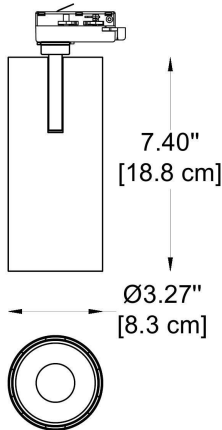

HOW TO ORDER:

Example:

CODE : BY-RLL-TC-65341-01-K30-C90-B1-WL

CODE:

BY-RLL-TC-65341-01-K30-C90-B1-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65170-05**

Dimensions: Ø: 3.27" (8.3 cm) x H: 7.4" (18.8 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: LENS

Light Source: LED (COB)

Power & Currents: **-W1** - 20W / 500 mA

-W2 - 27W / 700 mA

-W3 - 36W / 900 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle & lumens: For 20W model:

-B1 - 20.0° = 2278 lm

-B2 - 30.6° = 2299 lm

-B3 - 50.7° = 2335 lm

For 27W model:

-B1 - 20° = 2993 lm

-B2 - 30.7° = 2086 lm

-B3 - 50.9° = 3119 lm

For 36W model:

-B1 - 20.4° = 3455 lm

-B2 - 28.9° = 3562 lm

-B3 - 46.1° = 3600 lm

Finish Options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

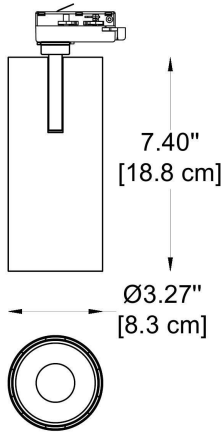

HOW TO ORDER:

CODE:

Example:

CODE : BY-RLL-TC-65341-01-K30-C90-B1-WL

PHOTOMETRICS:

For 20W model:



h(m)	E(lx)	D(mm)
1	14835	352
2	3709	704
3	1648	1056



h(m)	E(lx)	D(mm)
1	9171	547
2	2293	1094
3	1019	1640




h(m)	E(lx)	D(mm)
1	3079	949
2	770	1897
3	342	2846

For 27W model:



h(m)	E(lx)	D(mm)
1	19542	353
2	4885	706
3	2171	1059




h(m)	E(lx)	D(mm)
1	12189	549
2	3047	1098
3	1354	1646



h(m)	E(lx)	D(mm)
1	4061	952
2	1015	1904
3	451	2857

For 36W model:



h(m)	E(lx)	D(mm)
1	20994	359
2	5248	718
3	2333	1077



h(m)	E(lx)	D(mm)
1	14500	515
2	3625	1030
3	1611	1545



h(m)	E(lx)	D(mm)
1	3064	1170
2	766	2340
3	340	3510



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026