



CAMBIO COLLECTION (1.03" Magnetic Track System)

The Cambio Track Collection features a versatile DC Track System with sleek linear track heads, perfect for modern interiors.

Made from aluminum with an electrostatic powder coating, the low-voltage 48V track system is available in three profile options: Surface-Mounted S, Surface-Mounted L, and Recessed, with sizes of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm).



The system and linear track heads come in black and white finishes. Equipped with LED light sources, the linear track heads offer CCT options of 3000K, 4000K, and 5000K, with CRI choices of 80 or 90, ensuring high-quality, customizable lighting.



PROJECT

SPEC TYPE

NOTES

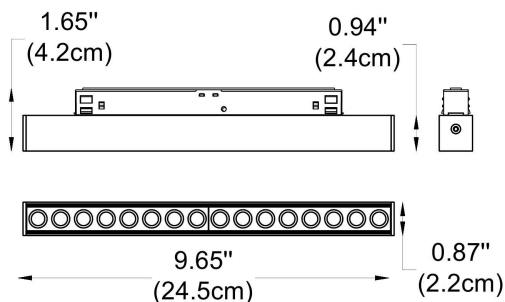

HOW TO ORDER:

CODE:

Example:

CODE:

BY-CMBC-TC-65560-01-K30-C80-WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65560-01**

Dimensions: L: 9.65" (24.5 cm) x H: 0.87" (2.2 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Cover: Lens

Light Source: LED (SMD)

Power: 12W

Lumens: 698 lm (3000K)

Output Current 350 mA

CCT: **K30** - 3000K

K40 - 4000K

K50 - 5000K

CRI: **C80** - 80

C90 - 90

Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

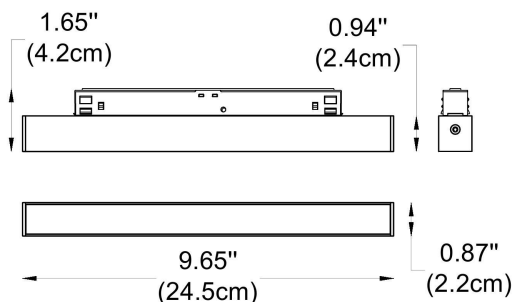

W 0.2 kg

White
Black

HOW TO ORDER:

CODE:

Example:

CODE:

BY-CMBC-TC-65560-01-K30-C80-WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65560-02**

Dimensions: L: 9.65" (24.5 cm) x H: 0.87" (2.2 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Cover: PC

Light Source: LED (SMD)

Power: 10W

Output Current 350 mA

CCT: **K30** - 3000K

K40 - 4000K

K50 - 5000K

CRI: **C80** - 80

C90 - 90

Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com




1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

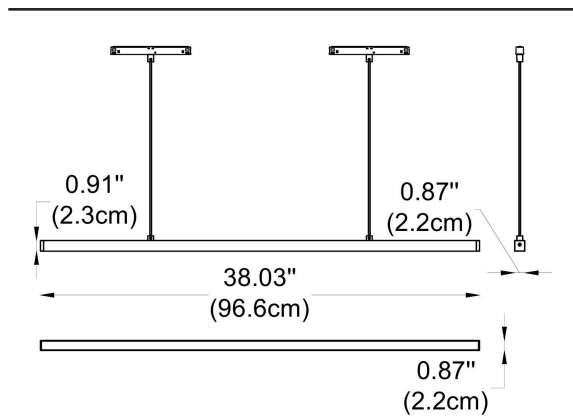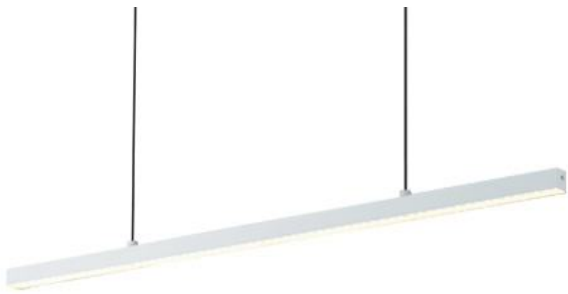

HOW TO ORDER:

CODE:

Example:

CODE:

BY-CMBC-TC-65560-01-K30-C80-WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - 59100

Dimensions: L: 38" (96.6 cm) x H: 0.87" (2.2 cm) x W: 0.91 (2.3cm)

Housing: AL. Extrude & AL. Die-Casting,
Electrostatic Powder Coating

Cover PC

Light Source: LED (SMD)

Power: 28W

Lumens: 1 924 lm (3000K)

CCT: **-K30 - 3000K**

-K40 - 4000K

-K50 - 5000K

CRI: **-C80 - 80**

-C90 - 90


Finish options: **-WL - White**

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/14/2026