

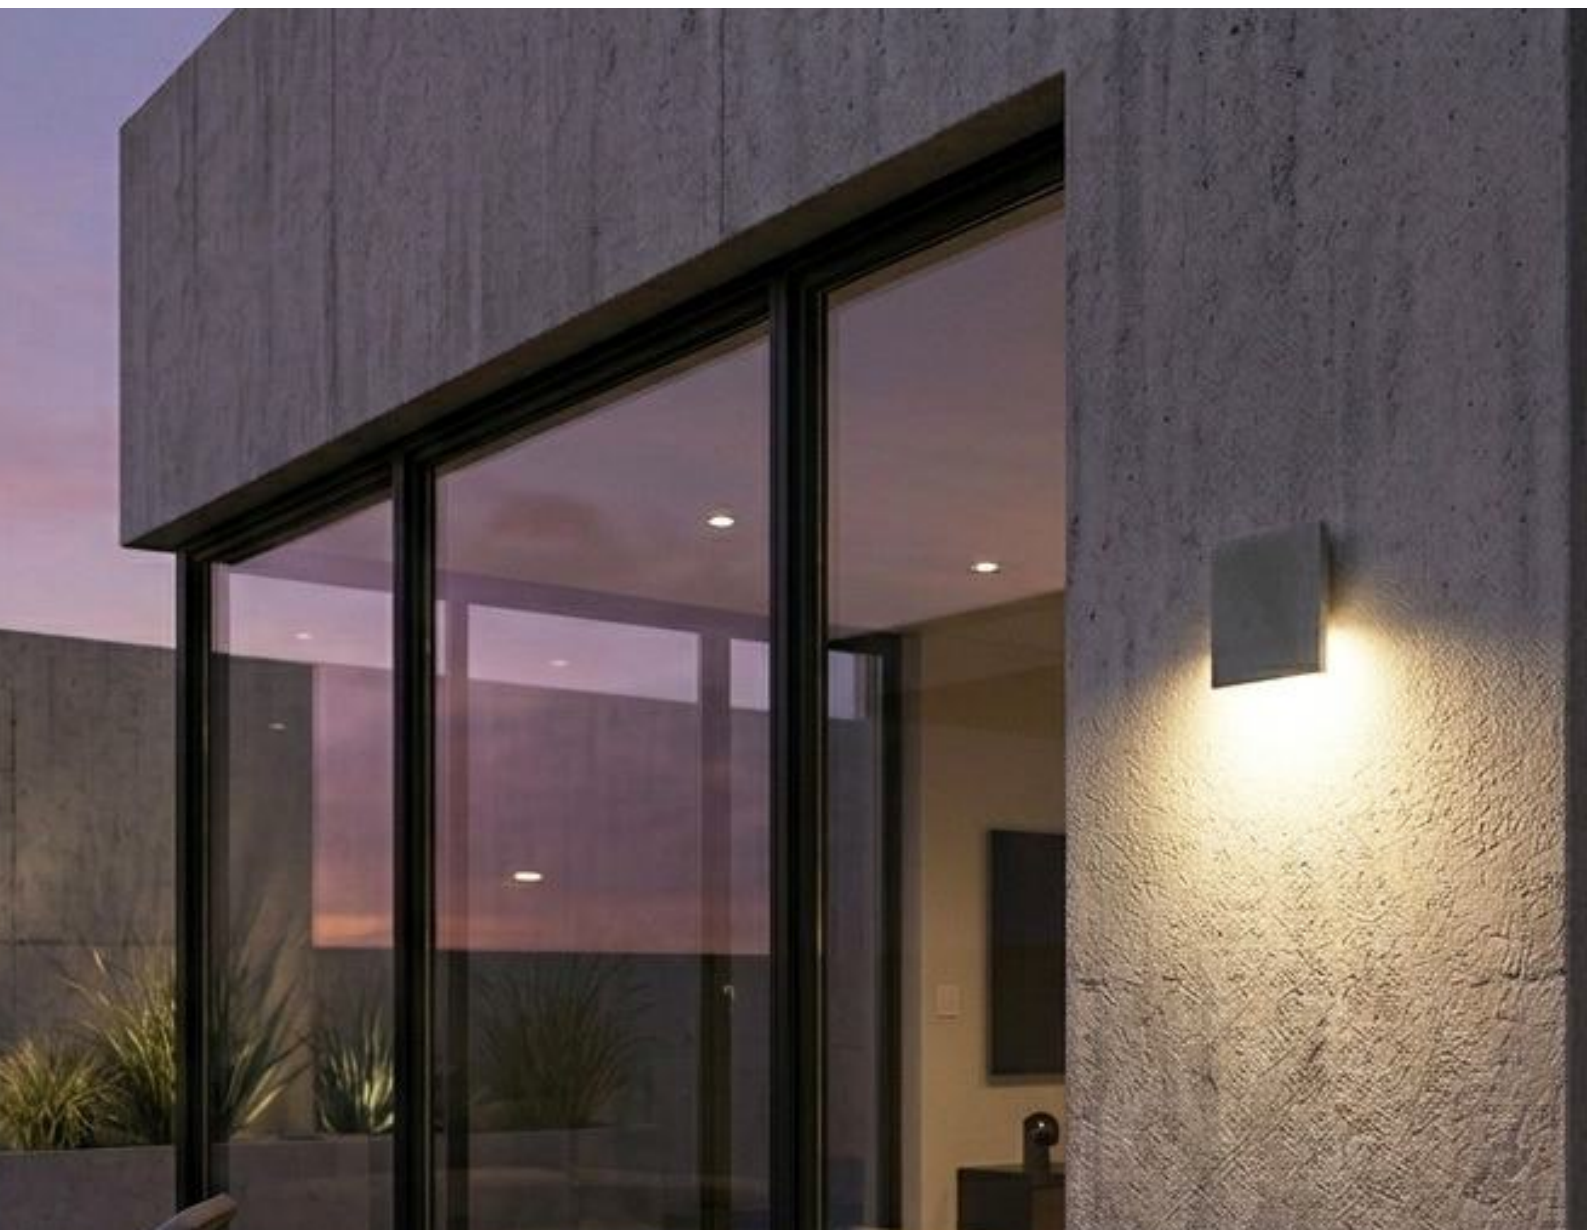




WING COLLECTION (OUTDOOR WALL LIGHTING)

The WING Outdoor Wall Light Collection is defined by clean geometric forms and a minimalist architectural aesthetic that complements contemporary exterior design. Its precisely crafted silhouette creates a refined lighting effect, bringing depth, texture, and visual interest to façades and outdoor living spaces. Designed for both performance and style, WING delivers efficient illumination while maintaining a discreet and sophisticated presence. Available in multiple sizes and configurations, the collection offers versatile solutions for modern residential and commercial projects.



	  	MATERIAL: BETALY® LIGHTING: LED VOLTAGE: 110-277V IP RATING: IP65 APPLIANCE CLASS: III DRIVER POSITION: Remote WARRANTY: 5 years MAIN FEATURES: High visual comfort Wide range of finishes Functional design Minimal design Operating Temperature: -40°~ +60°
PROJECT		
SPEC TYPE		
NOTES	 	

LED

110-277V

IP65







STANDARD

CASAMBI





WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

- OUTDOOR
- TECHNICAL
- DECORATIVE


Contact Us:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

Updated 06/11/2026

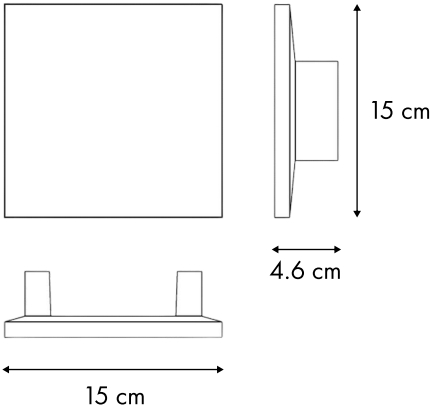

WING Q

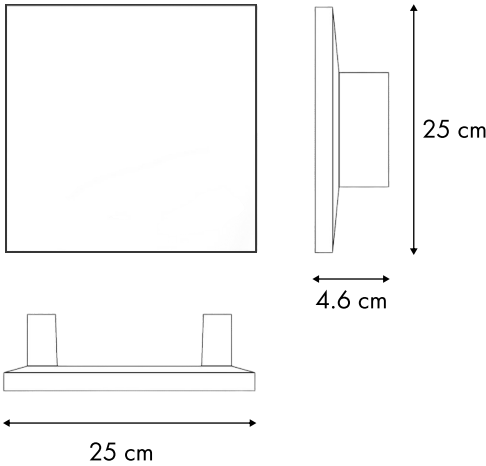

WING Q BIG

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-1090-9010-Q-L1-K22-DIM-396

BY-1090-9010-
Q-L1-K22-
DIM-396

1 MODELS:

-Q

Height - H: 5.9" (15 cm)

Length - L: 5.9" (15 cm)

Depth - P: 1.81" (4.6 cm)

LIGHT SOURCE:

-L1 LED / 5.5W / 110-277V / CRI 80 (Single emission)

-L2 LED / 11W / 110-277V / CRI 80 (Double emission)

CCT&LUMENS:

KELVINS 5.5W | 11W

-K22 2200K = 720 lm | 1440 lm

-K27 2700K = 760 lm | 1520 lm

-K30 3000K = 800 lm | 1600 lm

-Q-B

Height - H: 9.84" (25 cm)

Length - L: 9.84" (25 cm)

Depth - P: 1.81" (4.6 cm)

LIGHT SOURCE:

-L1 LED / 11W / 110-277V / CRI 80 (Single emission)

-L2 LED / 22W / 110-277V / CRI 80 (Double emission)

CCT&LUMENS:

KELVINS 11W | 22W

-K22 2200K = 1440 lm | 2880 lm

-K27 2700K = 1520 lm | 3040 lm

-K30 3000K = 1600 lm | 3200 lm



WE WELCOME ALL CUSTOM ORDERS


Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:


sales@gordonbullard.com

www.byiba.com

1 877-964-4646

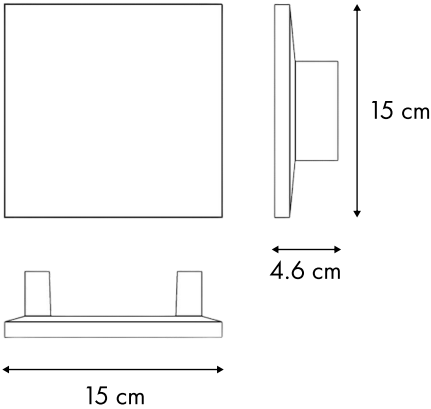

WING Q

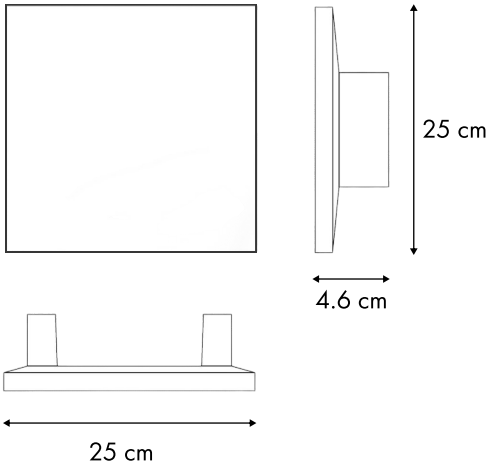

WING Q BIG

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-1090-9010-Q-L1-K22-DIM-396

BY-1090-9010-
Q-L1-K22-
DIM-396

2 DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- LT Lutron
- CAS Casambi
- NON Non-Dimmable

3 FINISH OPTIONS:

- 392 White
- 393 Green
- 394 Corten
- 395 Grey
- 396 Black
- 397 Sand



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 06/11/2026