




KERIS (OUTDOOR WALL LIGHTING)

The KERIS Outdoor Wall Light combines sharp geometric lines with a sculptural form, creating a sophisticated focal point for contemporary architecture. Its dual-direction light distribution delivers a dramatic interplay of light and shadow, adding depth and dimension to exterior surfaces. Engineered for modern outdoor environments, it offers durability, efficiency, and consistent performance in all weather conditions. Perfect for premium residential and commercial projects, KERIS enhances facades with a refined architectural lighting statement.

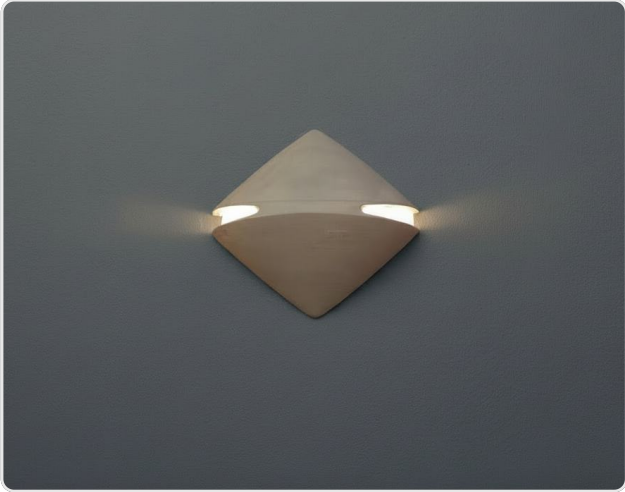

	 	MATERIAL: BETALY® LIGHTING: LED VOLTAGE: 110-277V IP RATING: IP65 APPLIANCE CLASS: III DRIVER POSITION: Remote WARRANTY: 5 years MAIN FEATURES: High visual comfort Wide range of finishes Functional design Minimal design Operating Temperature: -40°~ +60°
PROJECT		
SPEC TYPE		
NOTES		

LED

110-277V

IP65

III

CASAMBI


LUTRON

DALI



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

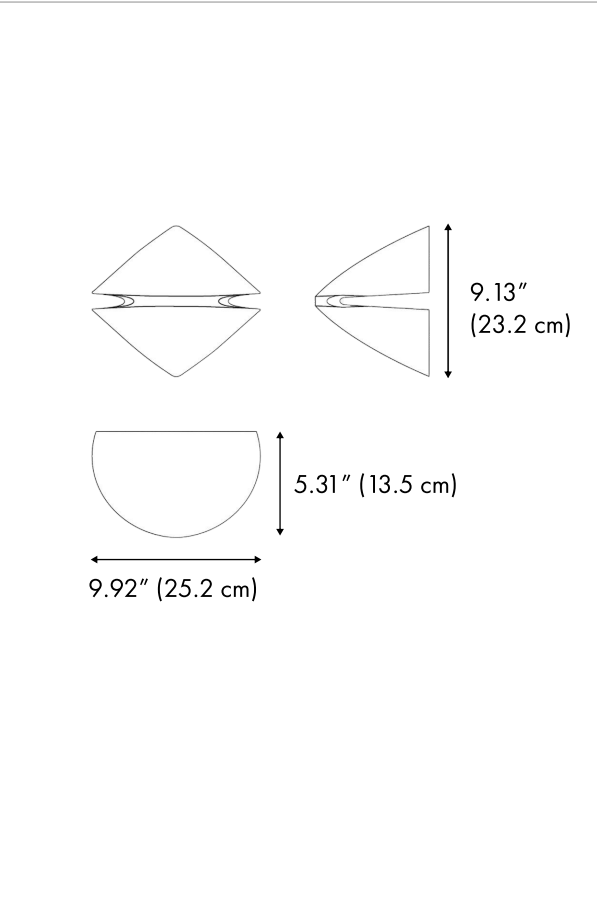

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-1205-9010-K22-DIM-392

BY-1205-9010-K22-DIM-392

1

DIMENSIONS:

Height - H:

9.13" (23.2 cm)

Length - L:

9.92" (25.2 cm)

Width - W:

5.31" (13.5 cm)

2

LIGHT SOURCE:

LED / 11W / 110-277V / CRI 80

3

CCT&LUMENS:

-K22

2200K = 1440 lm

-K27

2700K = 1520 lm

-K30

3000K = 1600 lm

4

DIMMING OPTIONS:

-DIM

0-10V

-DALI

DALI

-LT

Lutron

-CAS

Casambi

-NON

Non-Dimmable

5

FINISH OPTIONS:

-392

White

-393

Green

-394

Corten

-395

Grey

-396

Black

-397

Sand



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.