



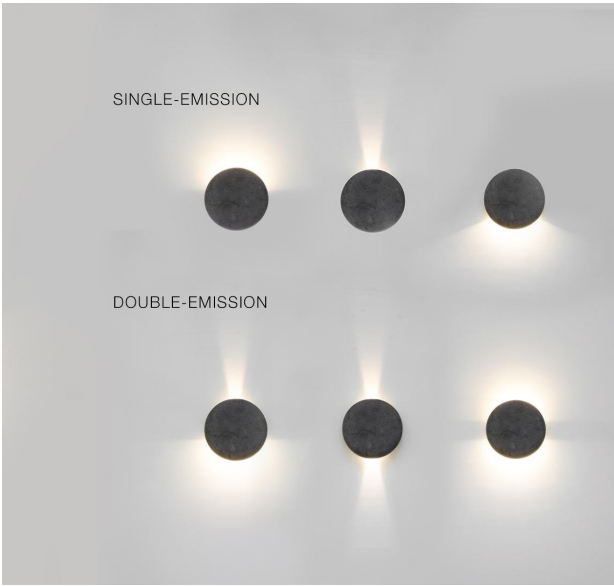

OCIO COLLECTION (OUTDOOR WALL LIGHTING)

The OCIO Outdoor Wall Light embraces minimalist design with a pure circular form that integrates seamlessly into contemporary architecture. Its soft, evenly diffused illumination creates a subtle lighting accent, enhancing exterior surfaces without visual distraction. Designed with a focus on simplicity and materiality, OCIO transforms light into an architectural element that adds depth and atmosphere to outdoor spaces. Ideal for modern façades, pathways, and landscape settings, it delivers a refined balance of elegance, functionality, and timeless design.



		MATERIAL: BETALY® LIGHTING: LED VOLTAGE: 110-277V IP RATING: IP65 APPLIANCE CLASS: III DRIVER POSITION: Remote WARRANTY: 5 years MAIN FEATURES: High visual comfort Wide range of finishes Functional design Minimal design Operating Temperature: -40°~ +60°
PROJECT		
SPEC TYPE		
NOTES		 

LED

110-277V

IP65

III

STANDARD

CASAMBI

LUTRON



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:


sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 06/11/2026


CODE: -S

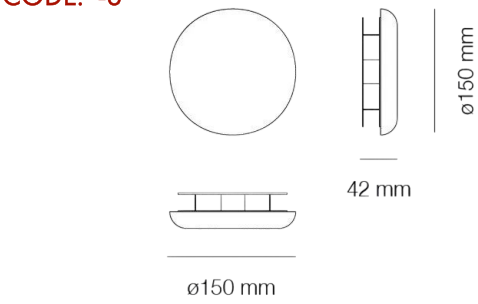

CODE: -M

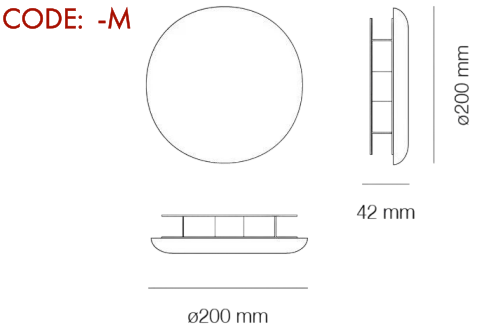

CODE: -L

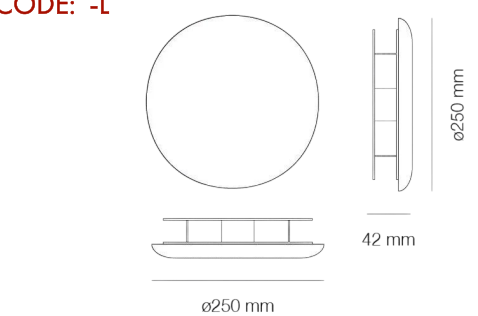

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-1207-9010-S-L1-K22-DIM-396

BY-1207-9010-S-
L1-K22-DIM-396

1 MODELS:

-S

DIMENSIONS:

Diameter - H: 5.91" (15 cm)
Depth - P: 16.54" (4.2 cm)

LIGHT SOURCE:

-L1 LED / 4W / 24Vdc / CRI80 (Single emission)
-L2 LED / 8W / 24Vdc / CRI80 (Double emission)

-M

DIMENSIONS:

Diameter - H: 7.87" (20 cm)
Depth - P: 16.54" (4.2 cm)

LIGHT SOURCE:

-L1 LED / 4W / 24Vdc / CRI80 (Single emission)
-L2 LED / 8W / 24Vdc / CRI80 (Double emission)

-L

DIMENSIONS:

Diameter - H: 9.84" (25 cm)
Depth - P: 16.54" (4.2 cm)

LIGHT SOURCE:

-L1 LED / 4W / 24Vdc / CRI80 (Single emission)
-L2 LED / 8W / 24Vdc / CRI80 (Double emission)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

HOW TO ORDER:

Example:

CODE: BY-1207-9010-S-L1-K22-DIM-396

BY-1207-9010-S-
L1-K22-DIM-396

2 CCT&LUMENS:

-K22	2200K = 540lm	} FOR L1 MODEL
-K27	2700K = 570lm	
-K30	3000K = 600lm	
-KK22	2200K = 1080lm	} FOR L2 MODEL
-KK27	2700K = 1140lm	
-KK30	3000K = 1200lm	


3 DIMMING OPTIONS:

-DIM	0-10V
-DALI	DALI
-LT	Lutron
-CAS	Casambi
-NON	Non-Dimmable


4 FINISH OPTIONS:

-392	White	
-393	Green	
-394	Corten	
-395	Grey	
-396	Black	
-397	Sand	


CODE: -S



CODE: -M



CODE: -L



PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 06/11/2026