



TWINKLE COLLECTION (track head)

The Twinkle Non-Magnetic Track Collection features 1-Circuit and 3-Circuit surface-mounted track profiles in three lengths—39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm)—with a voltage of 110-277V. Available in White or Black, the aluminum profiles are coated with electrostatic powder.


The collection includes three spotlight models:

Ø 2.56" x H 6"

Ø 2.56" x H 9.21"

Ø 3.27" x H 6.5"


The spotlights, also made from durable aluminum with an electrostatic powder coating, come with CCT options of 3000K, 4000K, and 5000K, and CRI ratings of 80 or 90 for optimal color rendering. Available in White or Black finishes, the Twinkle Non-Magnetic Track Collection offers a refined and customizable solution for indoor lighting.

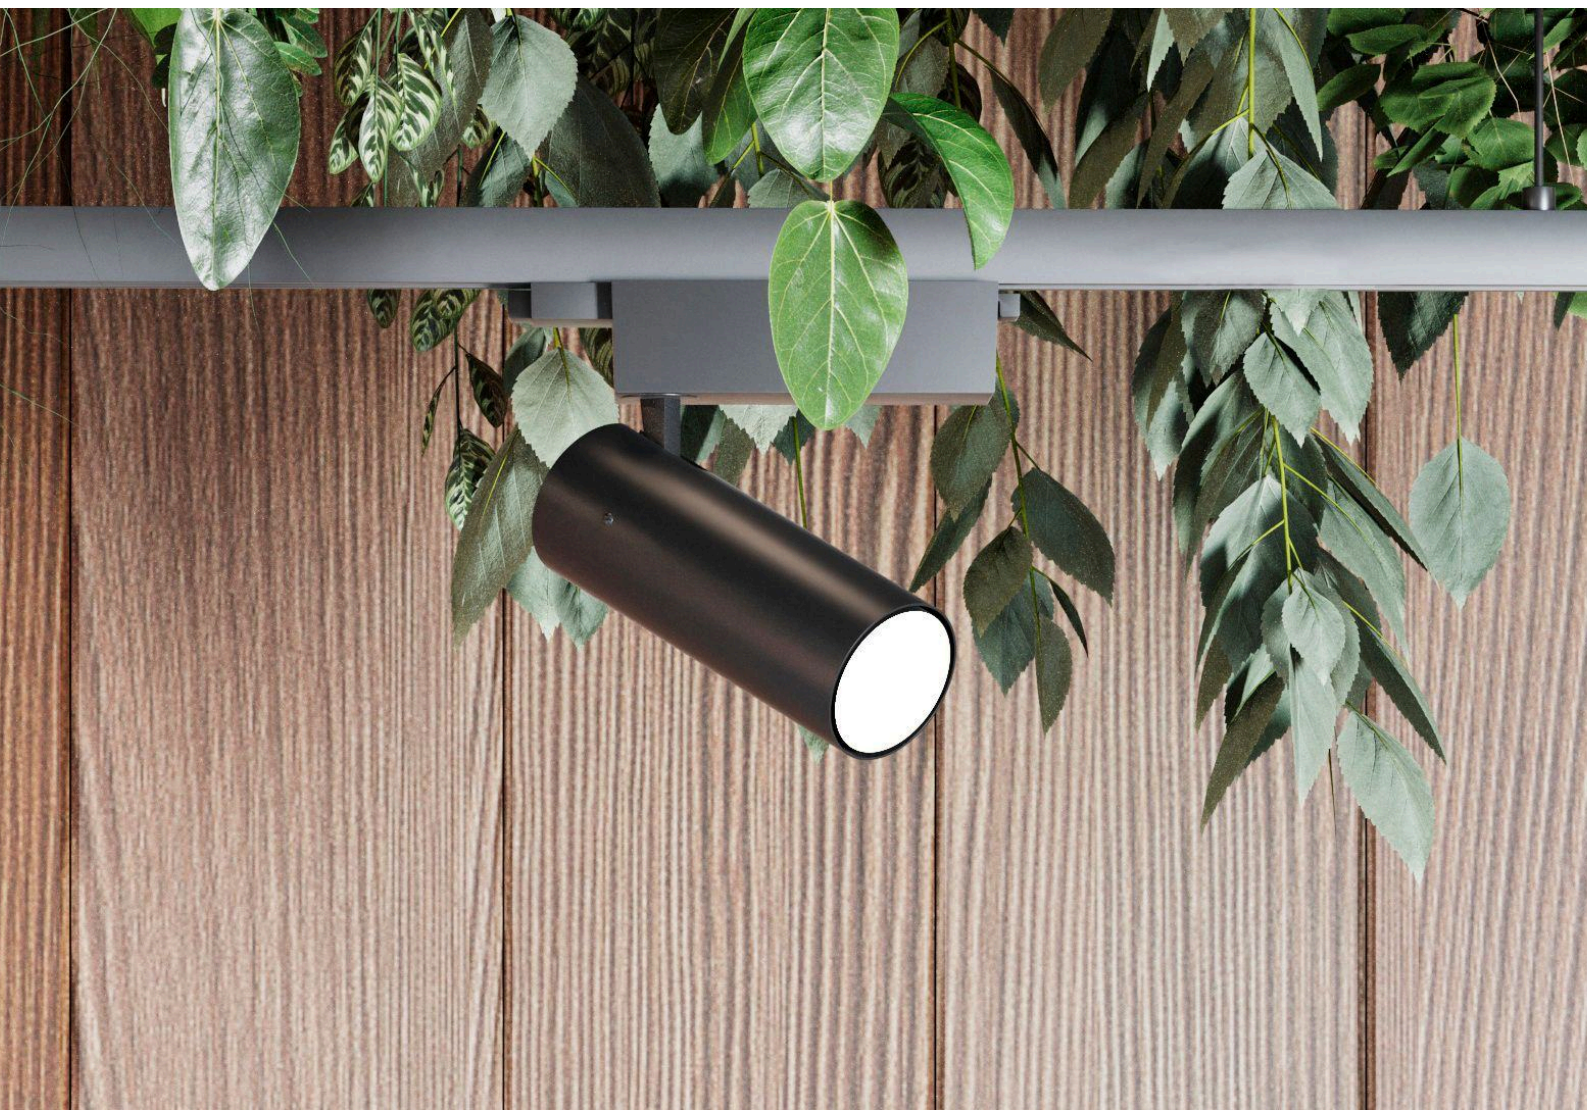

PROJECT

SPEC TYPE

NOTES

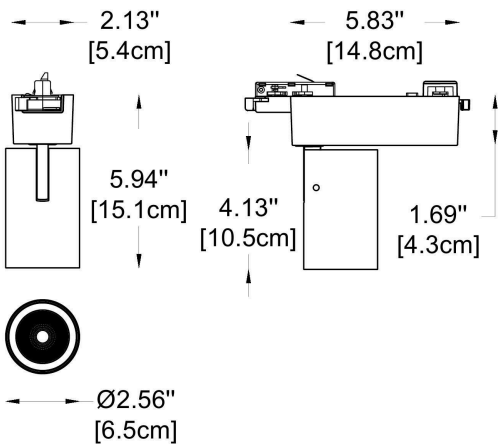

HOW TO ORDER:

Example:
CODE: BY-TWC-TC-65070-01-K30-C80-B1-WL

CODE:

65560-01-K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION


- CODE - -65070-01
- Dimensions: Ø: 2.56" (6.5 cm) x H: 6" (15 cm)
- Housing: AL Extrude, Electrostatic Powder Coating
- Reflector: PC (Vacuum Coating)
- Light Source: LED (COB)
- Power: 14W
- Output Current 350 mA
- CCT: -K30 - 3000K
- K40 - 4000K
- K50 - 5000K
- CRI: -C80 - 80
- C90 - 90

- Beam Angle -B1 - 15.5° = 1450 lm
- and lumens: -B2 - 28.2° = 1344 lm
- B3 - 39.5° = 1357 lm

- Finish options: -WL - White
- BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

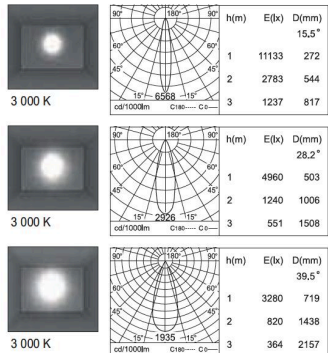

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646
Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:

CODE: BY-TWC-TC-65070-01-K30-C80-B1-WL

CODE:

65070-01-K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65070-02

Dimensions: Ø: 2.56" (6.5 cm) x H: 6" (23.4 cm)
Housing: AL Extrude, Electrostatic Powder Coating
Reflector: PC (Vacuum Coating)
Light Source: LED (COB)
Power: 28W
Output Current 350 mA

CCT: -K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: -C80 - 80

-C90 - 90

Beam Angle -B1 - 25.1° = 2583 lm

and lumens: -B2 - 35.1° = 2555 lm

Finish options: -WL - White

-BL - Black



Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C


PHOTOMETRICS:



3 000 K



3 000 K



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

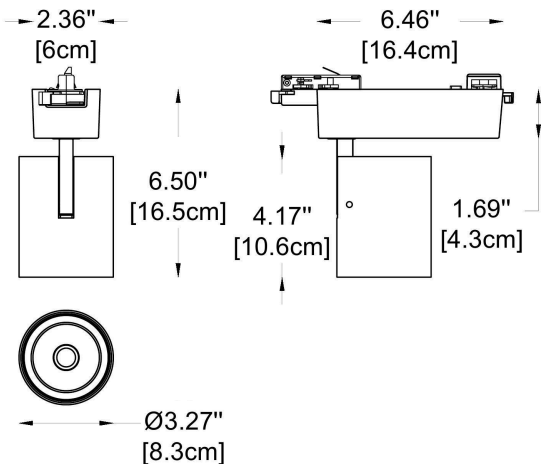

HOW TO ORDER:

Example:
CODE: BY-TWC-TC-65070-01-K30-C80-B1-WL

CODE:

65070-01-K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65070-02
Dimensions: Ø: 3.27" (8.3 cm) x H: 6.5" (16.5 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: Lens
Light Source: LED (COB)
Power: 23W
Output Current 600 mA

CCT: -K30 - 3000K
-K40 - 4000K
-K50 - 5000K


CRI: -C80 - 80
-C90 - 90

Beam Angle -B1 - 20.1° = 2513 lm
and lumens: -B2 - 35.1° = 2536 lm
-B3 - 46.3° = 2593 lm

Finish options: -WL - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.