




DRUM SQUARE

INSTALLATION TYPE:
(ACOUSTIC COLLECTION)

Installation Diagram

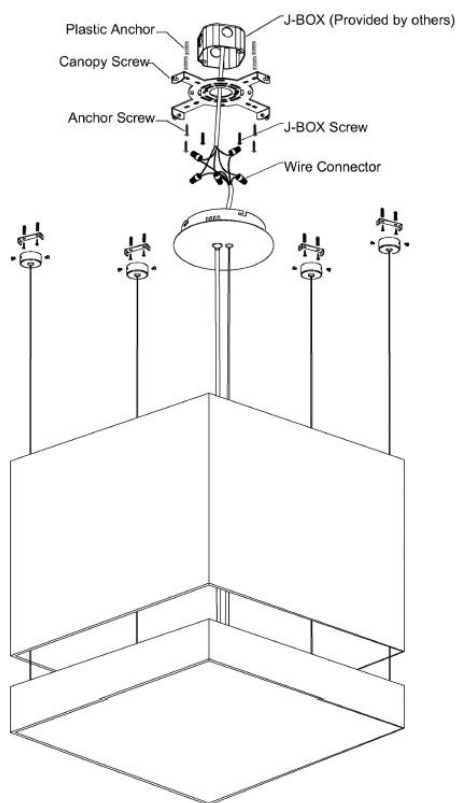


step 1


Shut "OFF" the electricity at main fuse box.

Place the wall switch in the "OFF" position of the room you are installing the fixture.

Tools You May Need

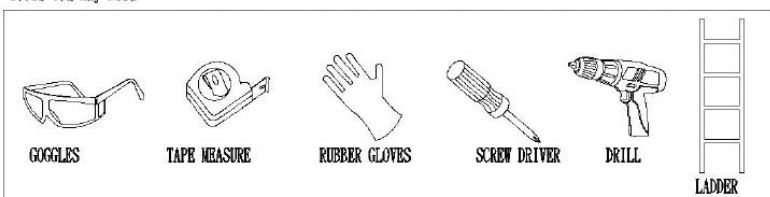

Circuit Box



Step2

Make point marks on the ceiling according to the Mounting pin and Canopy location.

sales@gordonbullard.com

www.byiba.com


1 877-964-4646



991 South Gull Lake Dr.


Richland, MI 49083

USA

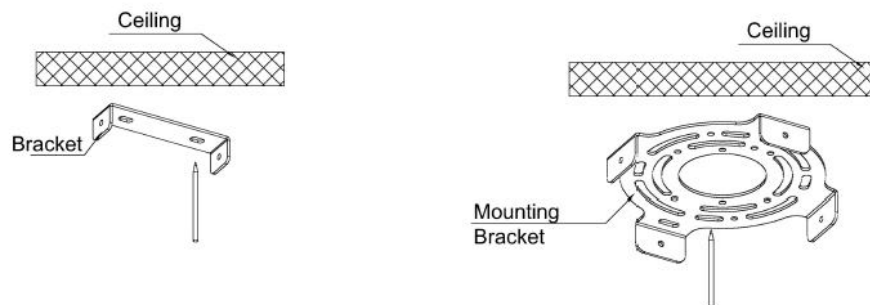

Step3


Take out Plastic Anchors, drill diameter **8mm** holes (Except Canopy position) on the ceiling according to the location mark as step2. Insert the Plastic Anchors into the holes. Then use Self-Tapping Anchor Screws to fix Mounting Pin with ceiling.

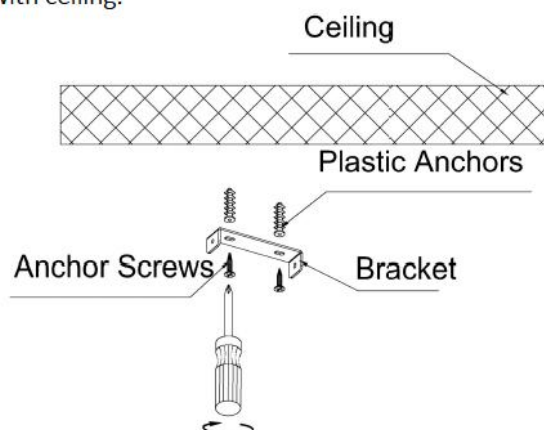

Step 4

Take out Plastic Anchors, drill 4 pcs diameter 8 mm holes on the ceiling according to Mounting Bracket. Insert the Plastic Anchors into the holes. Use 2 pcs J-BOX Screws to fix Mounting Bracket with J-Box, and Use 4pcs Self-Tapping Anchor Screws to fix Mounting Bracket on the ceiling. Refer to picture shown below.

NOTE: J-BOX used by Garvin 54171-S or equivalent Provided by others

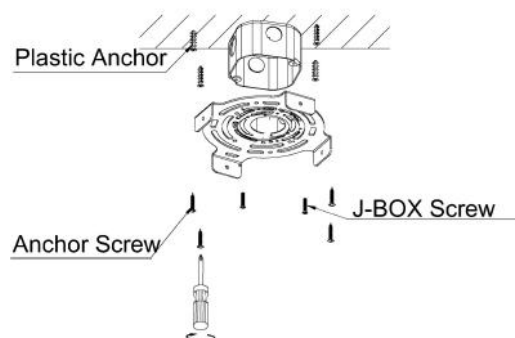

Attention: Must secure mounting plate at all connection points (junction box plus four outer points for small and medium size, or eight outer points for large size) to support fixture weight appropriately. Not using all mounting points could damage the fixture and void product warranty.


Step 5

sales@gordonbullard.com
www.byiba.com
1 877-964-4646




991 South Gull Lake Dr.
Richland, MI 49083
USA

Use wire connectors to connect L,N,G,DIM+,DIM- wires. After finish, put all wires with connector into J-Box.

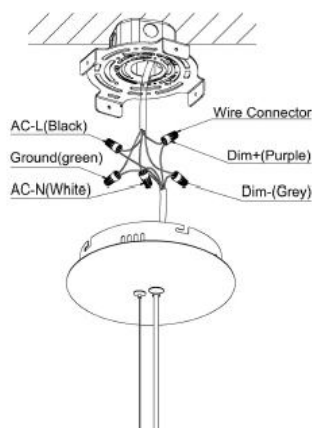


Step 6

Keep the Slot hole as vertical line with Side screw, put the lamp body upward. And make screw into slot, rotate Canopy and make Mounting Bracket and Canopy fixed.

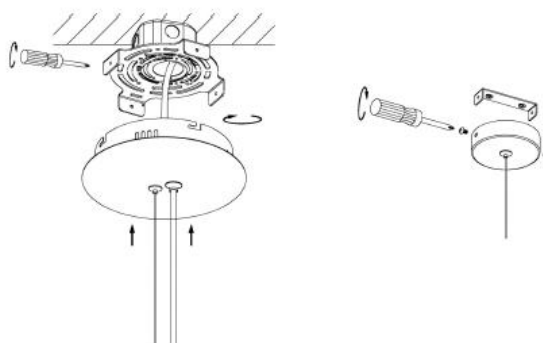

Step 7

Adjust the fixture safety cable and Aircraft cable length, use Screw to fix with Mounting Bracket and Mounting Canopy. Then loosen all the cables.

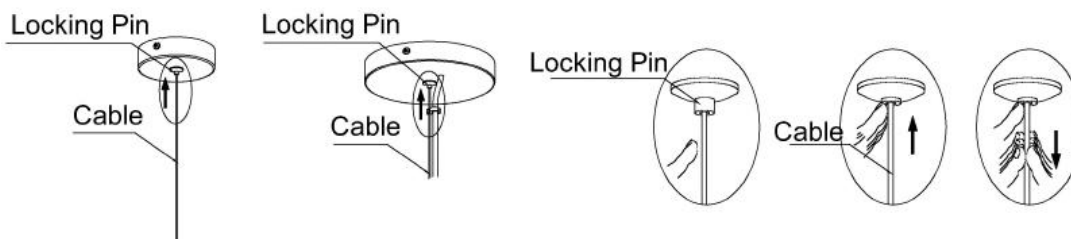

Step 9

After finish installation, turn on the electricity at main fuse box, the lighting works.

sales@gordonbullard.com

www.byiba.com


1 877-964-4646




991 South Gull Lake Dr.

Richland, MI 49083

USA

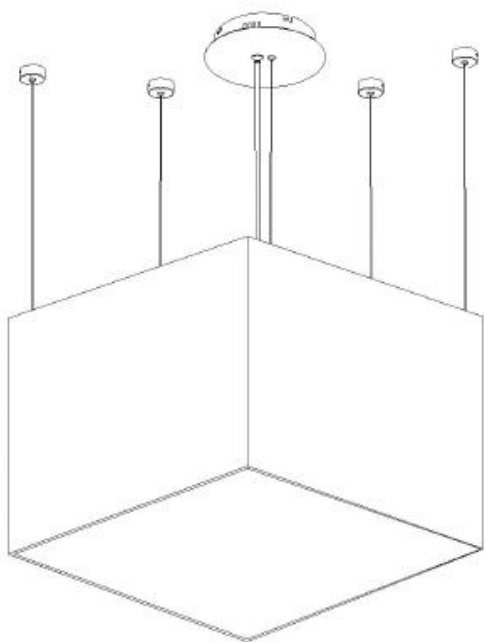

Circuit Box

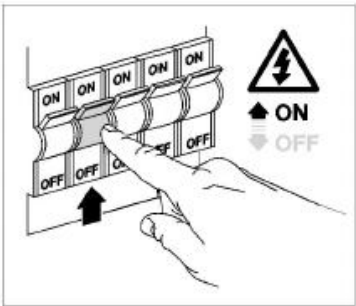

sales@gordonbullard.com
www.byiba.com
1 877-964-4646



991 South Gull Lake Dr.
Richland, MI 49083
USA



IMPORTANT

To ensure equipment safety you must carefully follow the instructions below. This leaflet must be kept handy by personnel entrusted with all ordinary and extraordinary maintenance.

- Before any installation or maintenance operation on the bulb, make sure it is disconnected from power
- Fit the correct bulbs, according to the type and power indicated on the lamp data label.
- Make sure the lamp technical features are compatible with the use you are going to make of it.
- Should you have any doubt, refer to the dealer or ask an electrician.
- When connecting to the mains, follow the correct colour code for power cables: (N) blue, (L) brown or black and, only for class I equipment, (T) yellow/green.
- When lamps are to be fitted to the wall directly through their ceramic parts, fasten the fixing screws lightly, to avoid breaking the ceramic.
- To clean the lamp on the outside, use a soft cloth, possibly wet. Do not use solvents or abrasive products. No liquid must get in contact with the lamp interior parts.
- Do not touch the equipment with dirty hands.



= Class I equipment, must be connected to an earth terminal.



= Double insulated lamp, does not need earthing.



= Electrical equipment in class III, electrical safety guaranteed by low voltage tension, does not require grounding



= Minimum distance to be observed from all lit up objects.



= Replace immediately the safety glass, if damaged, with the original part.



= The lamp uses low pressure bulbs, and needs no protection glass.



= The equipment at the end of its life must be collected separately from other waste.

sales@gordonbullard.com

www.byiba.com

1 877-964-4646



991 South Gull Lake Dr.

Richland, MI 49083

USA