

BYIBA
LIGHT


NEON DECORATIVE MODULES (magnetic track system)



PROJECT

SPEC TYPE

NOTES

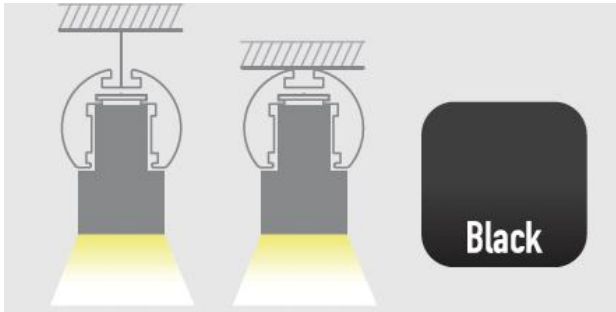

GENERAL INFORMATION:

Neon track is available as suspended and surface-mounted versions, the track can rotate horizontally, and the system also offers the option of different linear modules include diffuser, prismatic, in addition, spotlight, downlight and neon strip. These modules can be combined freely for different applications, at the same time, the track and the neon strip module can be creatively matched to achieve various rich stylings. The track system is operated with 48VDC, 1.18" (30 mm) diameter, small and exquisite.

MATERIAL:

Metal

FINISHING:

Black

LIGHTING:

LED

INPUT VOLTAGE:

48VDC

IP RATING:

20

MAXIMUM LOAD:

350W

PROFILES FINISH OPTION:

Black

MODULES FINISH OPTION:

Black

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

BY-NNDM-MTS-SC-01-100P

1 INSTALLATION TYPE:


- SC Suspension with pendant cable
- SR Suspension with rod
- SM Surface-Mounted

2 DIMENSIONS:

- 01 A) Diameter - Ø: 1.20" (3 cm)
B) Length - H: 39.4" (100 cm)
- 02 A) Diameter - Ø: 1.20" (3 cm)
B) Length H: 78.7" (200 cm)
- 03 A) Diameter - Ø: 1.20" (3 cm)
B) Length H: 118" (300 cm)

3 POWER SUPPLY:

- 100P 100W
- 150P 150W
- 250P 250W

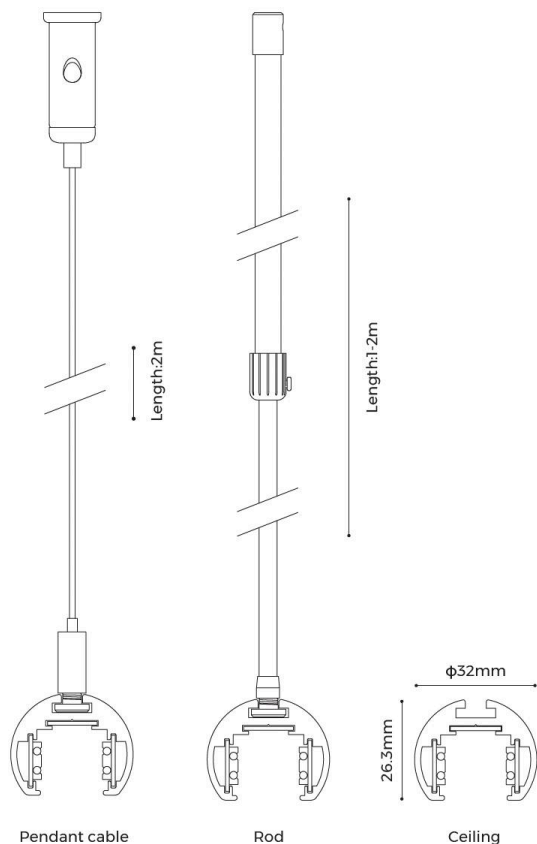

LED



IP20

WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

CODE:

DECORATIVE MODULES



WWW.BYIBA.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS


CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

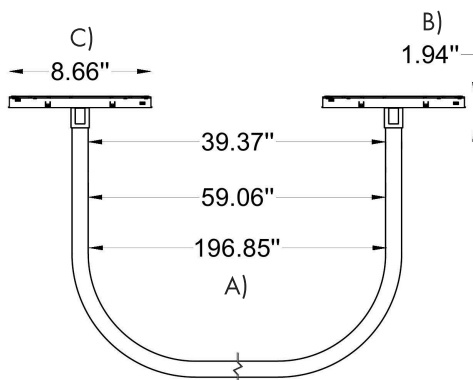

LED

48
VDC



IP20

0LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20NK-25

Dimensions:

A) Length -

-L1 L: 39.37" (100 cm)

-L2 L: 59.06" (150 cm)

-L3 L: 196.85" (500 cm)

B) Height -

H: 1.94" (4.93 cm)

C) Length -

L: 8.66" (22 cm)

Diffuser:

Silicone Neon

Light Source:

-LS1 LED / 12W / 840 lm

-LS2 LED / 28W / 1960 lm

-LS3 LED / 60W / 4200 lm

CCT:

-K27 2700K

-K30 3000K

-K35 3500K

-K40 4000K

CRI:

>90

Beam Angle:

B1 360°

Input voltage:

48VDC

Dimming:

-NON Non-Dimmable

-DL Dali

-LU Lutron

-CA Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM < 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

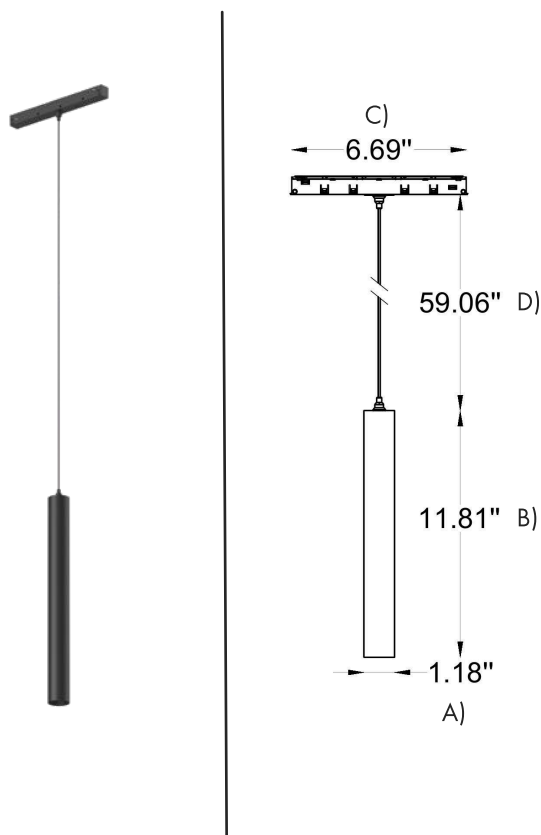

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20I-30

Dimensions:

A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 11.81" (30 cm)
C) Length - L: 6.69" (17 cm)
D) Cable - L: 59.06" (150 cm)

Diffuser: Spotlight

Light Source: LED / 5W / 330 lm

CCT:

-K27 2700K
-K30 3000K
-K40 4000K

CRI:

>90

Beam Angle:

-B1 24°
-B2 36°

Input voltage:

48VDC

Dimming:

-NON Non-Dimmable
-DL Dali
-LU Lutron
-CA Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM < 5 step

Intallation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

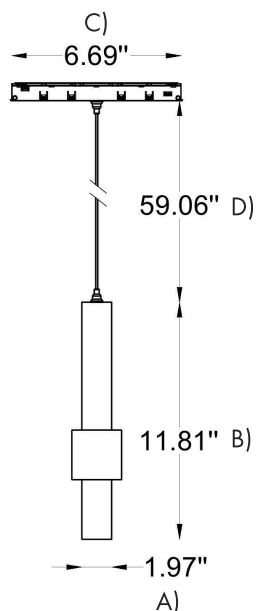

LED

48
VDC



IP20

LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-
LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-M20I-50

Dimensions:

A) Diameter - Ø: 1.97" (5 cm)
B) Height - H: 11.81" (30 cm)
C) Length - L: 6.69" (17 cm)
D) Cable - L: 59.06" (150 cm)

Diffuser: Spotlight

Light Source: LED / 5W / 330 lm

CCT:

-K27 2700K
-K30 3000K
-K40 4000K

☐
☐
☐

CRI:

>90

Beam Angle:

-B1 24°
-B2 36°

☐
☐

Input voltage:

48VDC

Dimming:

-NON Non-Dimmable
-DL Dali
-LU Lutron
-CA Casambi

☐
☐
☐
☐

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM < 5 step

Intallation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20U-30**

Dimensions: A) Diameter - Ø: 1.18" (3 cm)
B) Height - H: 11.81" (30 cm)
C) Length - L: 6.69" (17 cm)
D) Max. Height - L: 59.06" (150 cm)

Diffuser: Silicone Neon rigid tube

Light Source: LED / 7W / 490 lm

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K35 3500K ☐
-K40 4000K ☐

CRI: >90

Beam Angle: 360°

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black

IP rating: IP20

Color tolerance: SDCM < 5 step


Intallation: Track mounted

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

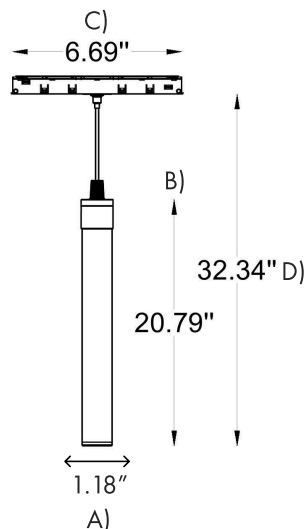

LED

48
VDC



IP20

0LUTRON

CASAMBI



WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

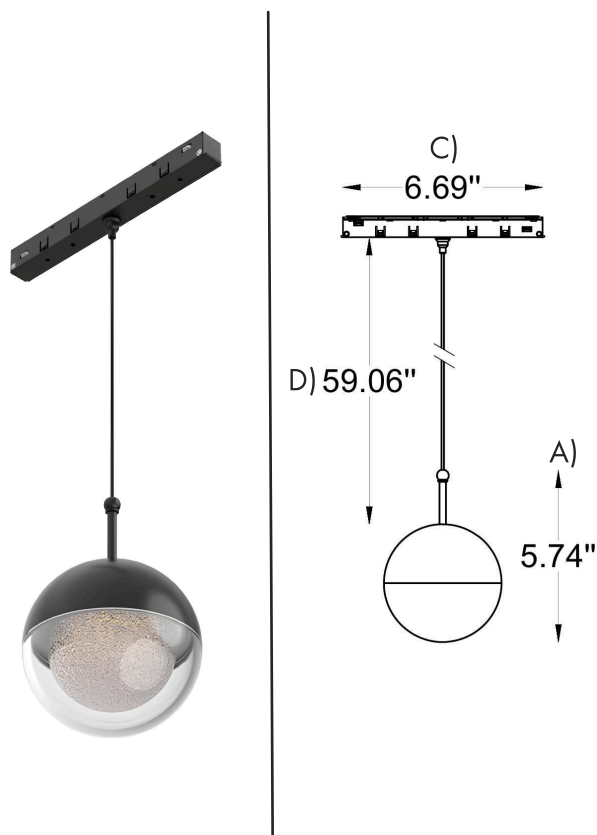

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20IB-100**

Dimensions: A) Diameter - Ø: 5.74" (3 cm)
B) Length - L: 6.69" (17 cm)
D) Cable - L: 59.06" (150 cm)

Diffuser: Glass

Light Source: LED / 5W / 500 lm

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

CRI: >90

Beam Angle: 360°

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black

IP rating: IP20

Color tolerance: SDCM < 5 step

Installation: Track mounted

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

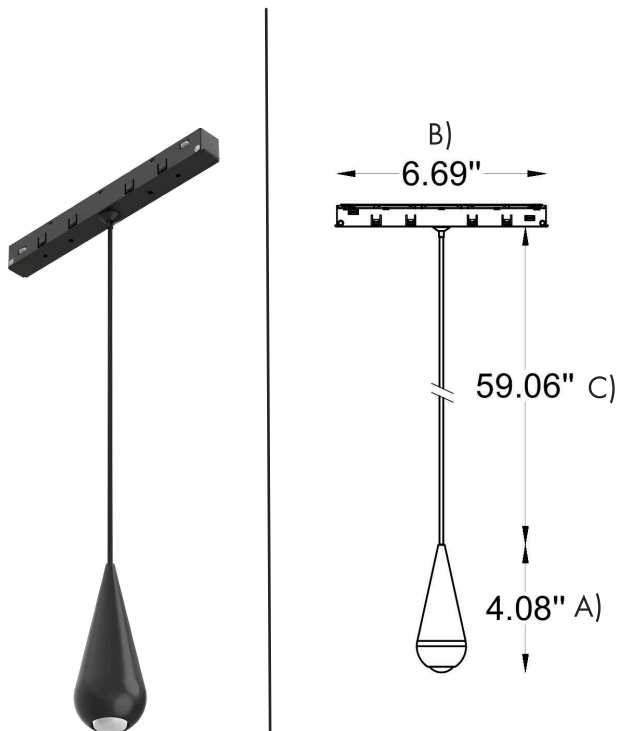

LED

48
VDC



IP20

LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20IW-40**

Dimensions: A) Height - H: 4.08" (4 cm)
B) Length - L: 6.69" (17 cm)
C) Cable - L: 59.06" (150 cm)

Diffuser: Lens

Light Source: LED / 3W / 280 lm

CCT: **-K27** 2700K ☐
-K30 3000K ☐
-K40 4000K ☐

CRI: >90

Beam Angle: 110°

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black

IP rating: IP20

Color tolerance: SDCM < 5 step

Installation: Track mounted

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

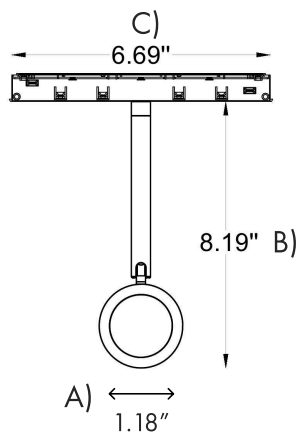

HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-M20SS-55**

Dimensions: A) Diameter - Ø: 2.17" (5.5 cm)
B) Height - H: 6.69" (17 cm)
C) Length - L: 59.06" (150 cm)

Diffuser: Lens

Light Source: LED / 3W / 170 lm

CCT: 1500K (Colorfull)

Input voltage: 48VDC

Dimming: **-NON** Non-Dimmable ☐
-DL Dali ☐
-LU Lutron ☐
-CA Casambi ☐

Coating: Black

IP rating: IP20

Color tolerance: SDCM < 5 step

Intallation: Track mounted

Warranty: 3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

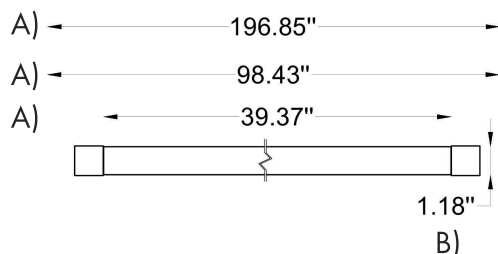

LED

48
VDC



IP20

0LUTRON

CASAMBI



HOW TO ORDER:

Example:

CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P

CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON

CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

CODE:

M20NK-25-L1-
LS1-K27-NON

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-RNR30NK

Dimensions:

A) Length - -L1 L: 39.37" (100 cm)

-L2 L: 98.43" (250 cm)

-L3 L: 196.85" (500 cm)

B) Diameter - Ø: 1.81" (3 cm)

Diffuser:

Round Neon

Light Source:

LED / 14W / 960 lm for L1 model*

LED / 35W / 2380 lm for L2 model*

LED / 70W / 4770 lm for L3 model*

CCT:

-K27

2700K

-K30

3000K

-K40

4000K

CRI:

>90

Beam Angle:

360°

Input voltage:

48VDC

Dimming:

-NON

Non-Dimmable

-DL

Dali

-LU

Lutron

-CA

Casambi

Coating:

Black

IP rating:

IP20

Color tolerance:

SDCM < 5 step

Installation:

Track mounted

Warranty:

3 years

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

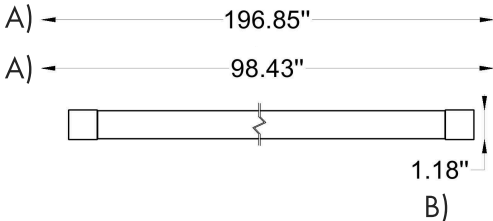

LED

48 VDC

IP20

DLUTRON

CASAMBI

HOW TO ORDER:

Example:
CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

4 CHOOSE TRACK HEAD:

CODE:

M20NK-25-L1-LS1-K27-NON

GENERAL INFORMATION

CODE -	-RNR30NJ	
Dimensions:	A) Length -	-L1 L: 39.37" (100 cm) ☐
		-L2 L: 98.43" (250 cm) ☐
	B) Diameter -	Ø: 1.81" (3 cm) ☐

Diffuser:	Round Tube
-----------	------------

Light Source:	LED / 14W / 940 lm for L1 model*
	LED / 35W / 2340 lm for L2 model*

CCT:	-K27	2700K	☐
	-K30	3000K	☐
	-K40	4000K	☐

CRI:	>90
------	-----

Beam Angle:	360°
-------------	------

Input voltage:	48VDC
----------------	-------

Dimming:	-NON	Non-Dimmable	☐
	-DL	Dali	☐
	-LU	Lutron	☐
	-CA	Casambi	☐

Coating:	Black
IP rating:	IP20
Color tolerance:	SDCM < 5 step
Intallation:	Track mounted
Warranty:	3 years


Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

* The above parameters are based on Ra90, 4000K light source.

PROJECT

SPEC TYPE

NOTES

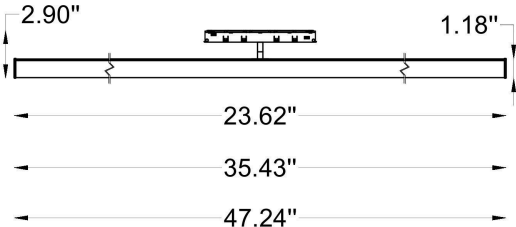

LED

48 VDC

IP20

0LUTRON

CASAMBI

HOW TO ORDER:

Example:
CODE FOR TRACK: BY-NNDM-MTS-SC-01-100P
CODE FOR TRACK HEAD: M20NK-25-L1-LS1-K27-NON
CODE FOR ACCESSORIES: PN-D-TLS-R893-CL21-TLS-R861 / PN-D

4 CHOOSE TRACK HEAD:

CODE:

M20NK-25-L1-LS1-K27-NON

GENERAL INFORMATION

CODE -	-M20NK-27	
Dimensions:	A) Length -	-L1 L: 42.52" (108 cm) ☐
		-L2 L: 62.2" (158 cm) ☐
		-L3 L: 200" (508 cm) ☐
	B) Length 2 -	L: 2.9" (7.4 cm)
	C) Height -	H: 1.81" (2.4 cm)

Diffuser:	Silicone Neon	
-----------	---------------	--

Light Source:	-LS1 LED / 10W / 450 lm	☐
	-LS2 LED / 14W / 630 lm	☐
	-LS3 LED / 48W / 2160 lm	☐

CCT:	-K27 2700K	☐
	-K30 3000K	☐
	-K40 4000K	☐

CRI:	>90	
------	-----	--

Beam Angle:	110°	
-------------	------	--

Input voltage:	48VDC	
----------------	-------	--

Dimming:	-NON Non-Dimmable	☐
	-DL Dali	☐
	-LU Lutron	☐
	-CA Casambi	☐

Coating:	White (neon)	
IP rating:	IP20	
Color tolerance:	SDCM< 3 step	
Intallation:	Track mounted	
Warranty:	3 years	

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

ACCESSORIES:

-L90-MR20(A) L-shaped corner (Downward)	-L90N-MR20(A) L-shaped corner (Inward)	-L90-MR20(B) L-shaped corner (Downward)	-L90N-MR20(B) L-shaped corner (Inward)	-L90-MR20(C) L-shaped corner (Downward)
-L90N-MR20(C) L-shaped corner (Inward)	-L90-MS20 L-shaped corner (Downward)	-L90N-MS20 L-shaped corner (Inward)	-L90-MH20 L-shaped corner (Downward)	-L90N-MH20 L-shaped corner (Inward)
-L90-MH20(A) L-shaped Adjustable corner (Downward)	-T90-MH20(A) T-shaped Adjustable corner (Downward)	-X90-MH20(A) X-shaped Adjustable corner (Downward)		

HOW TO ORDER:

Example:
CODE: -L90MR20(A)-X90-MH20(A)

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

ACCESSORIES:

-PN-D Pendant cable (Track)	-TLS-R892 Pendant cable (Neon)	-PG-I Pendant rod (Track)	-TLS-R893 Pendant rod (Neon)	-CL-18 Ceiling accessories (Neon)
-CL-21 Ceiling screw (Track)	-TLS-R862(N) Power feeder of track	-TLS-R865 Female end cap	-TLS-R600 End cap	-TLS-R860 Turned connector
-TLS-R861 Straight connector (Without Wire locker)	-TLS-R863(N) I-shaped electrical connector 180° splicing bar	HOW TO ORDER: Example: CODE: PN-D-TLS-R893-CL21-TLS-R861		

NOTES

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

POWER SUPPLY:

-PN-D 100W Power supply 	-BN-V48-150P 150W Power supply 	-BN-V48-250P 250 Power supply 
---	---	--

HOW TO ORDER:

Example:
CODE: PN-D

NOTES

WWW.BULLARDCOLLECTION.COM

- TECHNICAL
- OUTDOOR
- DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646