



## BINO (6MM MAGNETIC TRACK SYSTEM)

BINO is an adjustable magnetic spotlight engineered for versatile directional lighting and precise beam control. Its modern cylindrical head rotates to illuminate focal points while maintaining a sophisticated architectural look. The slim magnetic design allows the fixture to be repositioned quickly without additional tools or wiring modifications. Manufactured from high-quality aluminum, BINO offers long-lasting performance and exceptional flexibility for dynamic lighting applications.





MATERIAL:

Die-cast aluminum housing  
PMMA or optical lens / diffuser  
Steel mounting components

LIGHTING:

LED: COB

VOLTAGE:

110-277V

IP RATING:

IP20

CRI:

CRI 90

APPLIANCE CLASS:

PROJECT

SPEC TYPE

NOTES

WARRANTY:

3 years

MAIN FEATURES:

High visual comfort  
Wide range of finishes  
Functional design  
Minimal design



WE WELCOME ALL CUSTOM ORDERS



Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

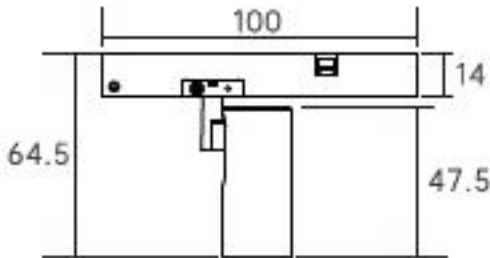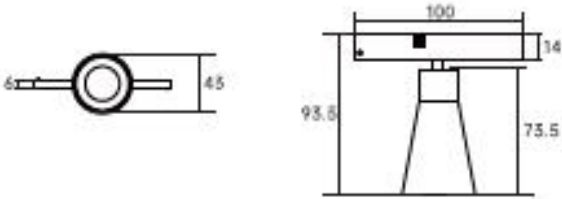

PROJECT

SPEC TYPE

NOTES

### HOW TO ORDER:

Example:

CODE: BY-BNO-MJ-G01-B1-K30-DIM-WH

BY-BNO-MJ-G01-B1-K30-DIM-WH

### 1 MODELS:

#### -G01

Length - L: 3.94" (10 cm)  
Hight - H: 3.68" (9.35 cm)  
Diameter - Ø: 1.69" (4.3 cm)

#### LIGHT SOURCE:

LED / 6W / 110-277V / CRI 90

#### BEAM ANGLE:

-B1 15°  
-B2 24°  
-B3 36°

#### -G02

Length - L: 3.94" (10 cm)  
Hight - H: 2.54" (6.45 cm)  
Diameter - Ø: 0.87" (2.2 cm)

#### LIGHT SOURCE:

LED / 3W / 110-277V / CRI 90

#### BEAM ANGLE:

-B1 15°  
-B2 38°  
-B3 60°

#### -G03

Length - L: 3.94" (10 cm)  
Hight - H: 2.54" (6.45 cm)  
Diameter - Ø: 0.87" (2.2 cm)

#### LIGHT SOURCE:

LED / 3W / 110-277V / CRI 90

#### BEAM ANGLE:

-B1 15°  
-B2 24°  
-B3 36°



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR TECHNICAL DECORATIVE



Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/14/2026

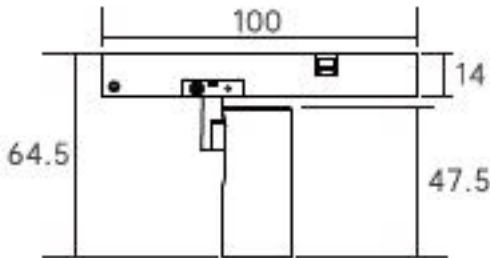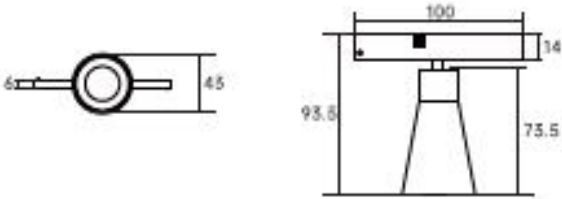

PROJECT

SPEC TYPE

NOTES

### HOW TO ORDER:

Example:

CODE: BY-BNO-MJ-G01-B1-K30-DIM-WH

BY-BNO-MJ-G01-B1-K30-DIM-WH

#### 1 MODELS:

-G04

Length - L: 3.94" (10 cm)

Hight - H: 2.95" (7.5 cm)

Diameter - Ø: 0.87" (2.2 cm)

#### LIGHT SOURCE:

LED / 6W / 110-277V / CRI 90

#### BEAM ANGLE:

-B1 15°

-B2 24°

-B3 36°

#### 2 CCT:

-K30 3000K

-K35 3500K

-K40 4000K

#### 3 DIMMING OPTIONS:

-DIM 0-10V

-DALI DALI

-NON Non-Dimmable

#### 4 FINISH OPTIONS:

-WH Elegant White

-CG Champagne Gold

-GB Gun Black

-CHR Chrome

-YH Yahei (Dark Gray / Graphite)

-CUS Custom on request



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/14/2026