




## BLACK TIE (track head)

The Black Tie Non-Magnetic Track system features 1-Circuit and 3-Circuit profiles available in three lengths: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Operating on 110-277V, the track comes in white or black finishes, crafted from aluminum with electrostatic powder coating for durability.

Included is a spotlight model measuring Ø 3.85" (10 cm) x W 5.9" (15 cm), with a 20W LED light source. It offers CCT options of 3000K or 4000K, CRI choices of 80 or 90, and is available in white, black, or gray finishes, providing versatile lighting solutions for indoor spaces.

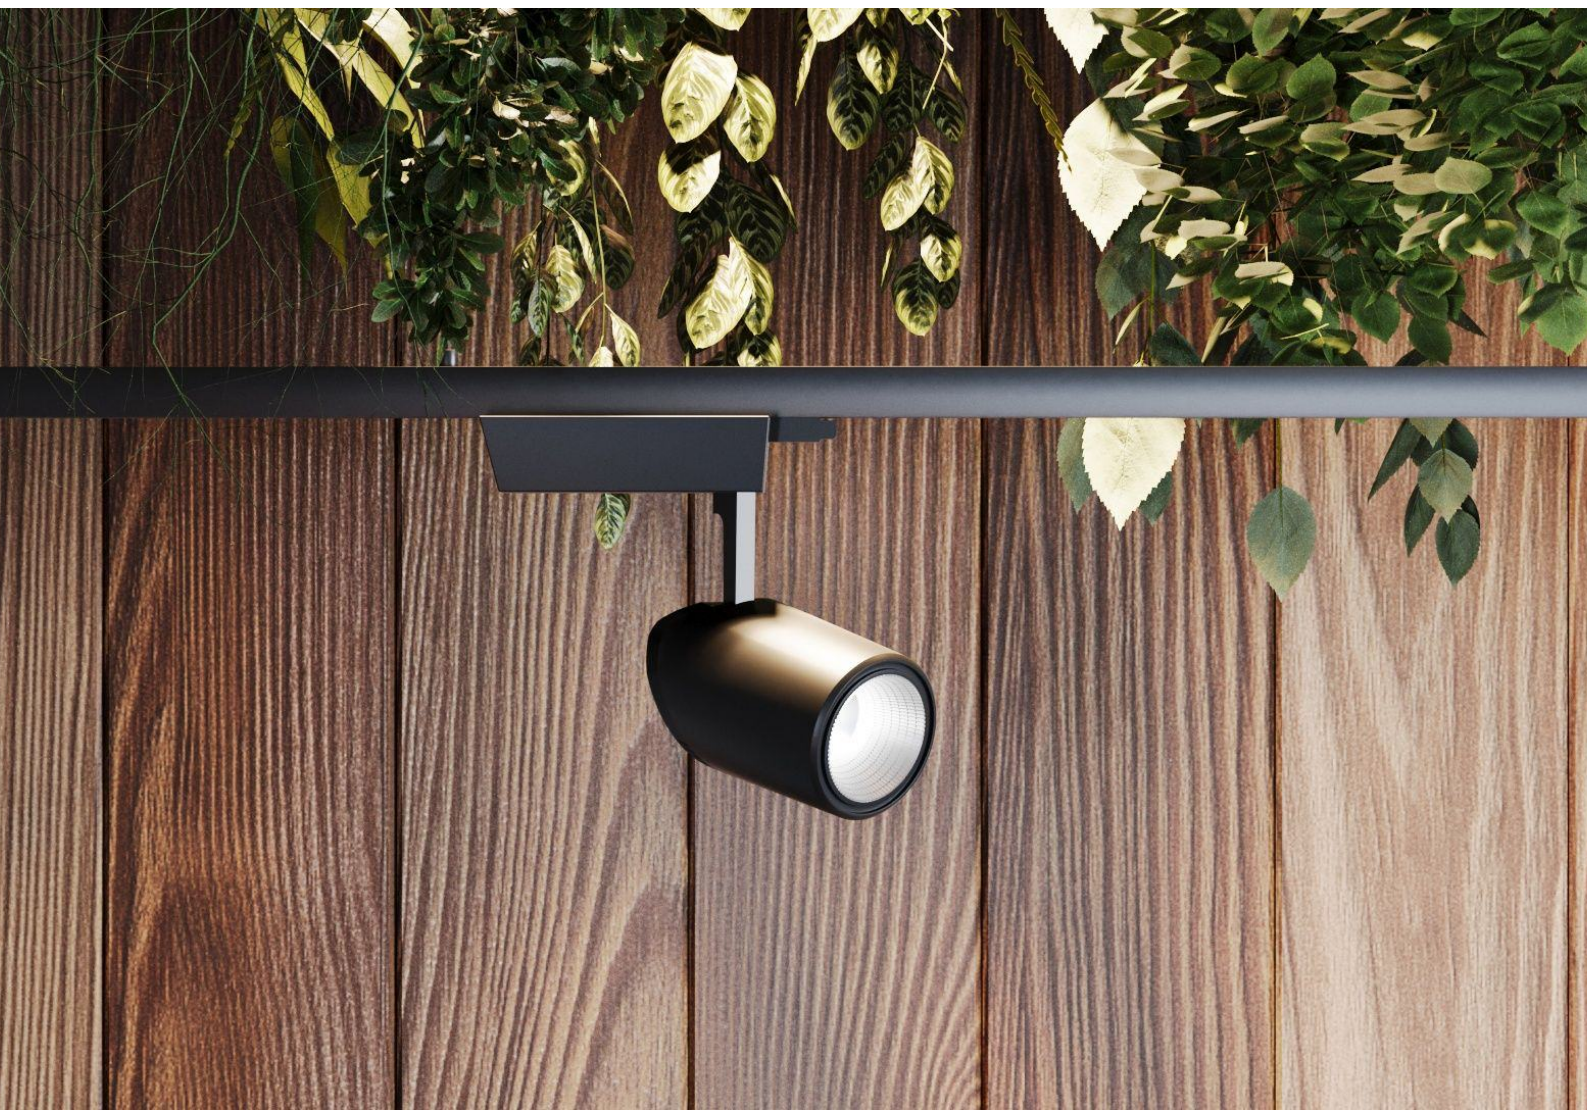

PROJECT

SPEC TYPE

NOTES



### HOW TO ORDER:

Example:

CODE: BY-BLT-TC-63732-K30-C80-B1-WL

CODE:

BLT-TC-63732-K30-C80-B1-WL

### 1 CHOOSE TRACK HEAD:

#### GENERAL INFORMATION

**CODE - -63732**

Dimensions: Ø: 3.85" (10 cm) x W: 5.9" (15 cm)

Housing: AL Extrude, Electrostatic Powder Coating

Reflector: PC (Vacuum Coating)

Gear Box: AL Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power: 20W

Output Current 500 mA

CCT: **-K30 - 3000K**

**-K40 - 4000K**

CRI: **-C80 - 80**

**-C90 - 90**

Beam Angle **-B1 - 17.7° = 2277 lm**

and lumens: **-B2 - 25.5° = 2244 lm**

**-B3 - 38.9° = 2284 lm**

Finish options: **-WL - White**



**-BL - Black**

**-GR - Gray**

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

#### PHOTOMETRICS:

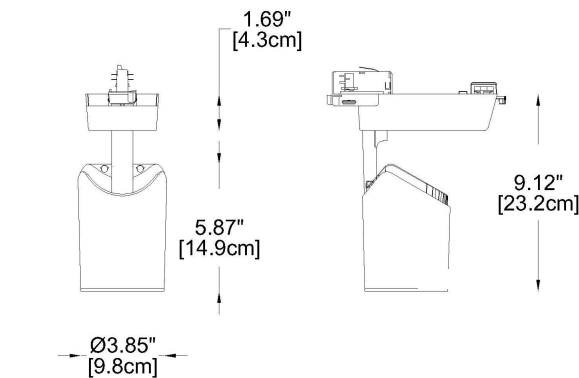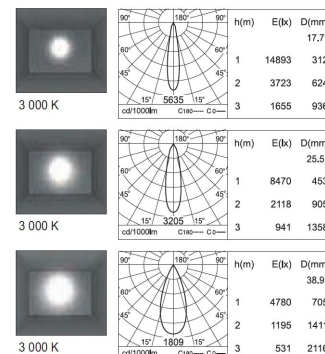

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026