



UNICO (track head)

The UNICO Non-Magnetic Track system features 1-Circuit and 3-Circuit track profiles, available in three lengths: 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). It operates at 110-277V and is crafted from aluminum with an electrostatic powder coating, offered in white or black finishes.

The included spotlight model measures Ø 4.20" (10.6 cm) x H 9.53" (24.2 cm) and comes in 31W or 42W options. The reflector is made of anodized specular silver, or you can choose a lens. CCT options include 3000K or 4000K, with CRI ratings of 80 or 90, available in white, black, or gray finishes.




PROJECT

SPEC TYPE

NOTES



REFLECTOR

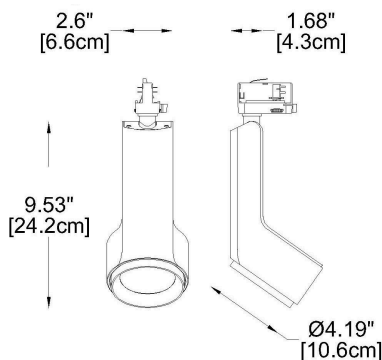

HOW TO ORDER:

Example:
CODE: BY-UNC-TC-65190-W3-K30-C80-B1-WL

CODE:

BY-UNC-
TC-65190-W3-
K30-C80-B1-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65190
 Dimensions: Ø: 4.20" (10.6 cm) x H: 9.53" (24.2 cm)
 Housing: AL. Extrude, Electrostatic Powder Coating
 Reflector: AL. Anodized Specular Silver
 Gear Box: AL. Die-Casting, Electrostatic Powder Coating
 Light Source: LED (COB)
 Power & Currents: -W2 - 20W / 500 mA
 -W3 - 28W / 700 mA

CCT: -K30 - 3000K
 -K40 - 4000K

CRI: -C80 - 80
 -C90 - 90

Beam Angle & lumens: For 20W model:
 -B1 - 17.7° = 2277 lm
 -B2 - 25.5° = 2244 lm
 -B3 - 38.9° = 2284 lm

For 28W model:
 -B1 - 17.8° = 3044 lm
 -B2 - 30.6° = 3000 lm
 -B3 - 39.2° = 3056 lm

Finish options: -WL - White
 -BL - Black
 -GR - Gray

Operating temperature range - -20 to +40°C
 Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026


PROJECT

SPEC TYPE

NOTES



LENS

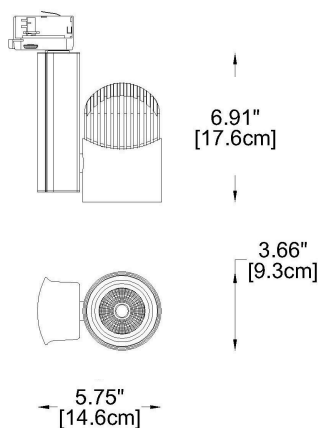

HOW TO ORDER:

Example:

CODE: BY-UNC-TC-65190-W3-K30-C80-B1-WL

CODE:

BY-UNC-
TC-65190-W3-
K30-C80-B1-WL

1

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65191
Dimensions:	Ø: 4.20" (10.6 cm) x H: 9.53" (24.2 cm)
Housing:	AL. Extrude, Electrostatic Powder Coating
Reflector:	Lens
Gear Box:	AL. Die-Casting, Electrostatic Powder Coating
Light Source:	LED (COB)
Power & Currents:	-W2 - 20W / 500 mA -W3 - 27W / 700 mA

CCT:	-K30 - 3000K -K40 - 4000K
------	------------------------------

CRI:	-C80 - 80 -C90 - 90
------	------------------------

Beam Angle & lumens:	For 20W model: -B1 - 20° = 2278 lm -B2 - 30.6° = 2299 lm -B3 - 50.7° = 2335 lm
----------------------	---

	For 27W model: -B1 - 20° = 2993 lm -B2 - 30.7° = 3086 lm -B3 - 50.9° = 3119 lm
--	---

Finish options:	-WL - White -BL - Black -GR - Gray
-----------------	--

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES



REFLECTOR



LENS



HOW TO ORDER:

Example:
CODE: BY-UNC-TC-65190-W3-K30-C80-B1-WL

CODE:

BY-UNC-TC-65190-W3-K30-C80-B1-WL

PHOTOMETRICS:

FOR REFLECTOR TYPE:

20W MODEL

h(m)	E(lx)	D(mm)
1	14893	312
2	3723	624
3	1655	936

h(m)	E(lx)	D(mm)
1	8470	453
2	2118	905
3	941	1358

h(m)	E(lx)	D(mm)
1	4780	705
2	1195	1411
3	531	2116

28W MODEL

h(m)	E(lx)	D(mm)
1	19683	313
2	4921	626
3	2187	940

h(m)	E(lx)	D(mm)
1	10984	461
2	2746	923
3	1220	1384

h(m)	E(lx)	D(mm)
1	6340	713
2	1585	1426
3	704	2139

FOR LENS TYPE:

20W MODEL



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

WWW.BYIBA.COM

OUTDOOR TECHNICAL DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646
Updated 08/12/2026