

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

CODE:

Example:

CODE:

-35-T-D9-B20-K30-C80-WL-DIM

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-35-T-D9
Dimensions:	A) Length - 8.78" (22.3 cm)
	B) Height - 3.94" (10 cm)
	C) Diameter - 1.38" (3.5 cm)

Material:	Aluminum
Light Source:	LED / 2x5W / 700 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,21

Beam Angle:	-B20 - 20°
	-B30 - 30°
	-B40 - 40°
	-B60 - 60°



CCT:	-K27 - 2700K
	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White (RAL9003)
	-BL - Black (RAL9005)
	-CUS - Custom on request*

Dimming Options:	-DIM - 0-10V
	-DL - DALI
	-TR - TRIAC

Operating temperature range - -20 to +40°C

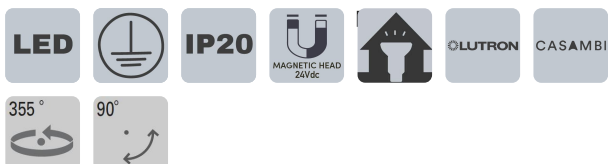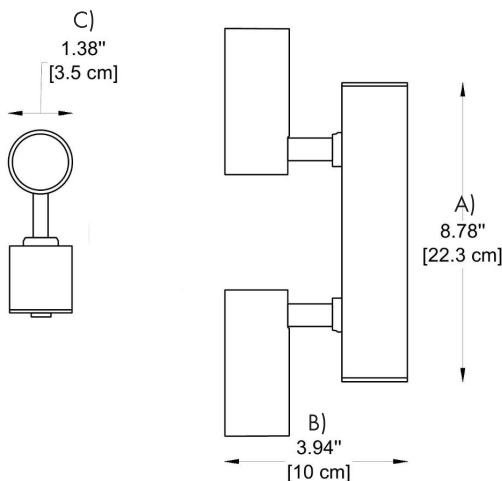

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com



1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

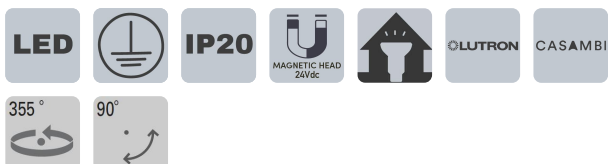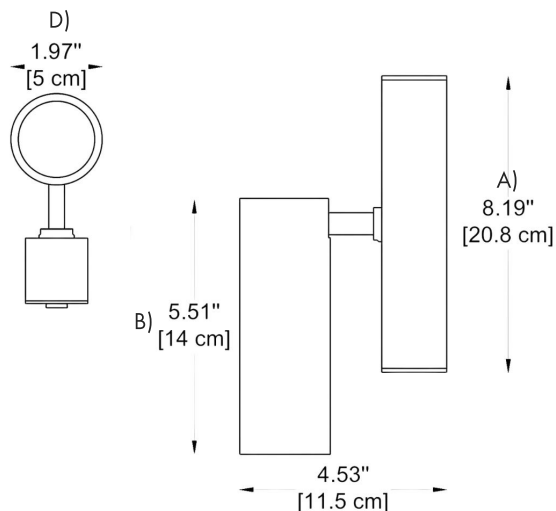

HOW TO ORDER:

Example:

CODE:

-35-T-D9-B20-K30-C80-WL-DIM

CODE:

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-50-D9
Dimensions:	A) Canopy Length - 8.19" (20.8 cm)
	B) Head Length - 5.51" (14 cm)
	C) Height - 4.53" (11.5 cm)
	D) Diameter - 1.97" (5 cm)

Material:	Aluminum
Light Source:	LED / 10W / 700 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,21

Beam Angle:	-B18 - 18°
	-B24 - 24°
	-B36 - 36°

CCT:	-K27 - 2700K
	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White (RAL9003)
	-BL - Black (RAL9005)
	-CUS - Custom on request*

Dimming Options:	-DIM - 0-10V
	-DL - DALI
	-TR - TRIAC

Operating temperature range - -20 to +40°C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com



1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

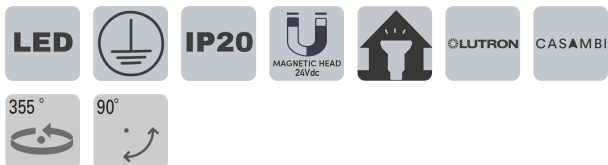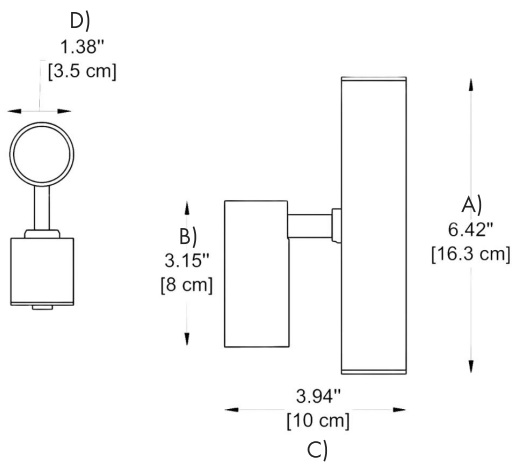

HOW TO ORDER:

Example:

CODE:

-35-T-D9-B20-K30-C80-WL-DIM

CODE:

4

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-50-D9
Dimensions:	A) Canopy Length - 8.19" (16.3 cm)
	B) Head Length - 3.15" (8 cm)
	C) Height - 3.94" (10 cm)
	D) Diameter - 1.38" (3.5 cm)

Material:	Aluminum
Light Source:	LED / 5W / 378 lm / 24Vdc
Lighting type:	Direct
Lighting distribution:	Symmetric
Optical type:	Spot
Dimmable:	Yes
Driver:	Remote
Driver type:	Electronic
Emergency:	Without
Insulation class:	III
Weight (lb)	1,21

Beam Angle:	-B18 - 20°
	-B24 - 30°
	-B36 - 40°
	-B60 - 60°

CCT:	-K27 - 2700K
	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White (RAL9003)
	-BL - Black (RAL9005)
	-CUS - Custom on request*

Dimming Options:	-DIM - 0-10V
	-DL - DALI
	-TR - TRIAC



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646