BYIBA
LIGHT

INSTALLATION INSTRUCTION

MILLI TRIS

INSTALLATION TYPE:
CEILING - MOUNTED / WALL

LED | 110-277V | IP20 | IP44

UPDATED: 11/20/2025

			025.409(REV05)	4193 4193B 4193C 4193D	4193E 4193F 4193G 4194 4194B
LED: 6,5W 350 mA 13W 700 mA 8W 350 mA 16W 700 mA 32W 700mA		III	IP 20/ IP44	C.C. [m.A.]	

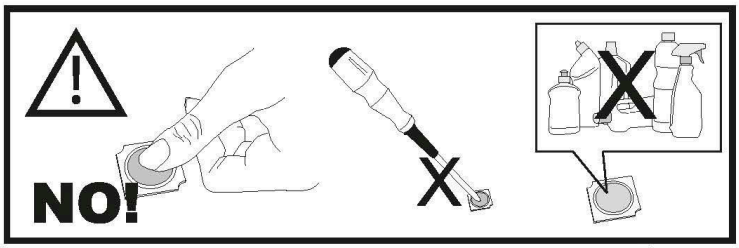

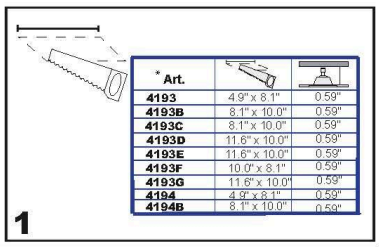

* Art.		
4193	4.9" x 8.1"	0.59"
4193B	8.1" x 10.0"	0.59"
4193C	8.1" x 10.0"	0.59"
4193D	11.6" x 10.0"	0.59"
4193E	11.6" x 10.0"	0.59"
4193F	10.0" x 8.1"	0.59"
4193G	11.6" x 10.0"	0.59"
4194	4.9" x 8.1"	0.59"
4194B	8.1" x 10.0"	0.59"

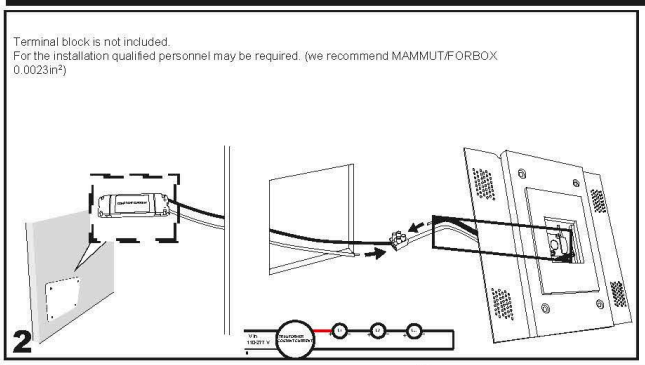

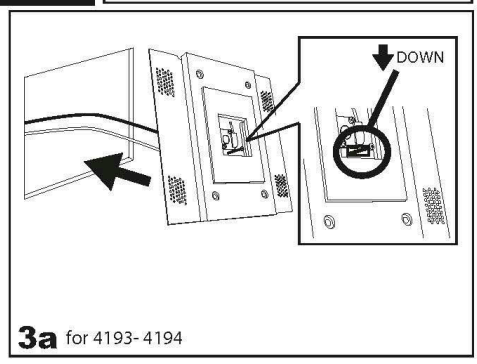

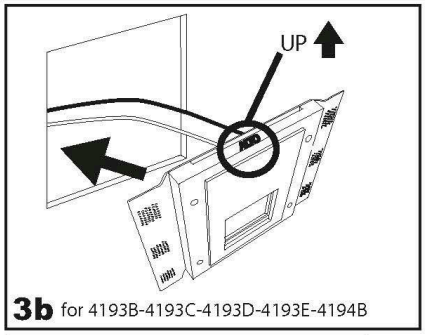

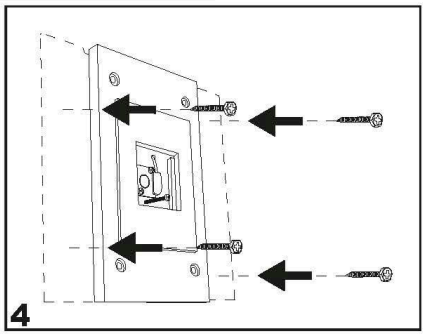



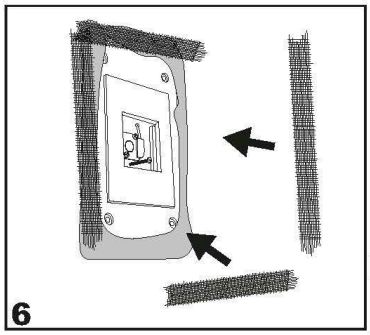



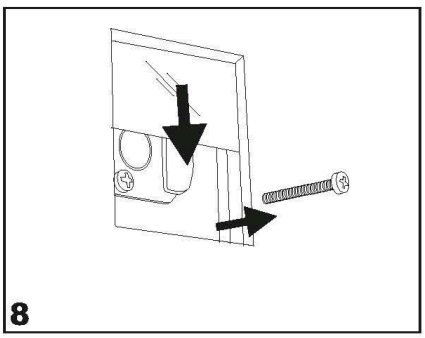

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

991 South Gull Lake Dr.
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Comany 2025 All Rights Reserved

FOR INSTALLATION IN **0.59"**



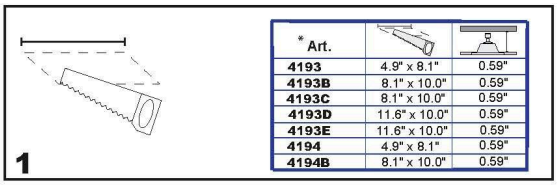

* Art.		
4193	4.9" x 8.1"	0.59"
4193B	8.1" x 10.0"	0.59"
4193C	8.1" x 10.0"	0.59"
4193D	11.6" x 10.0"	0.59"
4193E	11.6" x 10.0"	0.59"
4194	4.9" x 8.1"	0.59"
4194B	8.1" x 10.0"	0.59"



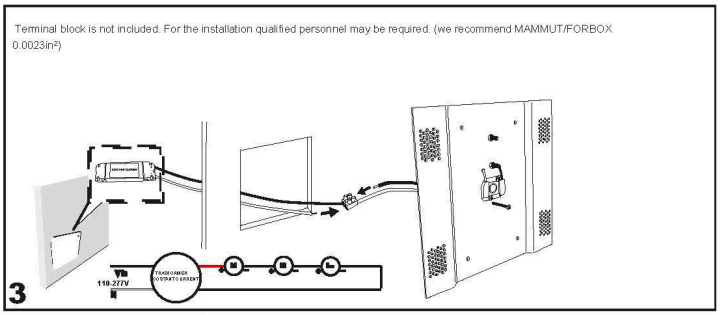

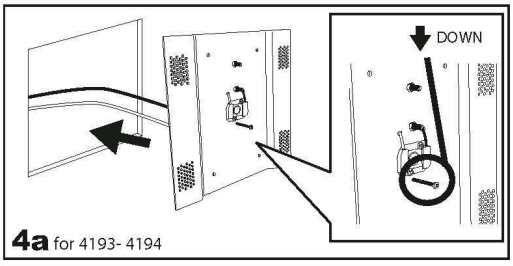

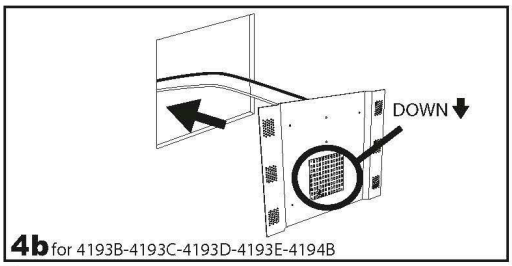

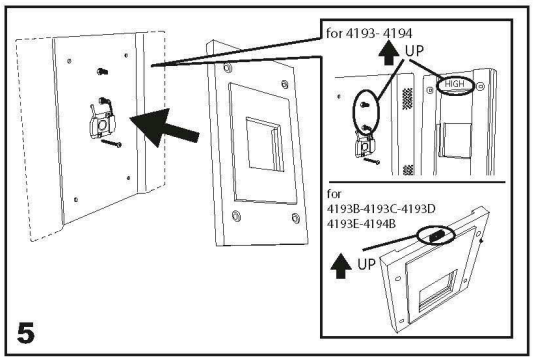

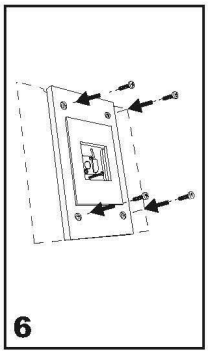

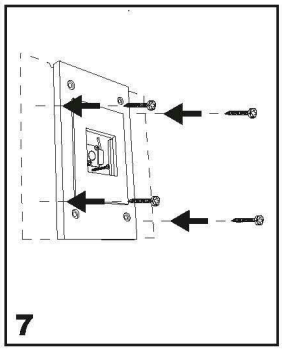









sales@gordonbullard.com
www.byiba.com
1 877-964-4646

991 South Gull Lake Dr.
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Comany 2025 All Rights Reserved

IMPORTANT

To ensure equipment safety you must carefully follow the instructions below. This leaflet must be kept handy by personnel entrusted with all ordinary and extraordinary maintenance.

- Before any installation or maintenance operation on the bulb, make sure it is disconnected from power
- Fit the correct bulbs, according to the type and power indicated on the lamp data label.
- Make sure the lamp technical features are compatible with the use you are going to make of it.
- Should you have any doubt, refer to the dealer or ask an electrician.
- When connecting to the mains, fallow the correct colour code far power cables: (N) blue, (L) brown or black and, only far class I equipment, (T)yellow/green.
- When lamps are to be fitted to the wall directly through their ceramic parts, fasten the fixing screws lightl, to avoid breaking the ceramic.
- To clean the lamp on the outside, use a soft cloth, possibly wet. Do not use solvents or abrasive products. No liquid must get in contact with the lamp interior parts.
- Do not touch the equipment with dirty hands.

= Class I equipment, must be connected to an earth terminal.

= Double insulated lamp, does not need earthing.

= Electrical equipment in class III, electrical safety guaranteed by low voltage tension, does not require grounding

= Minimum distance to be observed from all lit up objects.

= Replace immediately the safety glass, if damaged, with the original part.

= The lamp uses low pressure bulbs, and needs no protection glass.

= The equipment at the end of its life must be collected separately from other waste.

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

991 South Gull Lake Dr.
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Comany 2025 All Rights Reserved