



BELL COLLECTION (1.03" Magnetic Track System)



The Bell Track Collection offers a modern DC Track System with three profile options: Surface-Mounted S, Surface-Mounted L, and Recessed. Available in black and white finishes, the system comes in lengths of 39.4", 78.7", and 118". It features spotlights and pendant lights from the Bell series, with up to 10 customizable pieces. LED lighting options include CCT of 3000K, 4000K, or 5000K, with CRI of 80 or 90. Crafted from durable aluminum with an electrostatic powder coating, this collection is perfect for versatile and stylish indoor lighting.



PROJECT

SPEC TYPE

NOTES

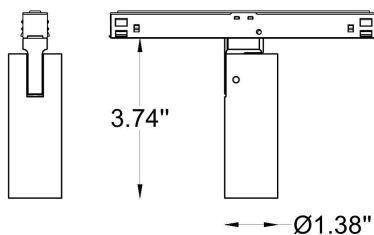

White
Black

HOW TO ORDER:

Example:

CODE:

BY-BLLC-TC-65020-03-K30-C80-B1-WL

CODE:

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65020-03

Dimensions: Ø: 1.4" (3.5 cm) x H: 3.74" (9.5 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED

Power: 9W

CCT: K30 - 3000K

K40 - 4000K

K50 - 5000K

CRI: C80 - 80

C90 - 90

Beam Angle B1 - 12.5° = 419 lm

and lumens: B2 - 17.5° = 396 lm

B3 - 25.5° = 394 lm


Finish options: -WL - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

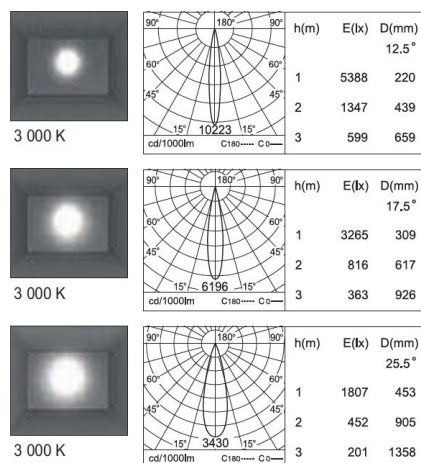

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com



1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

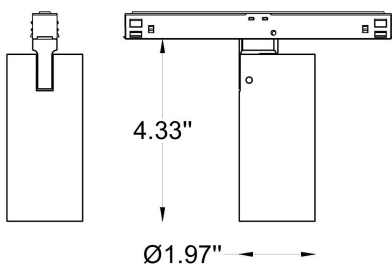

White
Black

HOW TO ORDER:

Example:

CODE:

BY-BLLC-TC-65020-03-K30-C80-B1-WL

CODE:

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65020-08**

Dimensions: Ø: 2" (5 cm) x H: 4.33" (11 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power: 15W

CCT: **K30** - 3000K

K40 - 4000K

CRI: **C80** - 80

C90 - 90

Beam Angle **B1** - 13.8° = 1 184 lm

and lumens: **B2** - 23.3° = 1 252 lm

B3 - 38.5° = 1 032 lm

Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



3 000 K

h(m)	E(lx)	D(mm)
1	12415	242
2	3104	484
3	1379	726



3 000 K

h(m)	E(lx)	D(mm)
1	6567	412
2	1642	823
3	730	1235



3 000 K

h(m)	E(lx)	D(mm)
1	2557	698
2	639	1395
3	284	2093



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com



1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

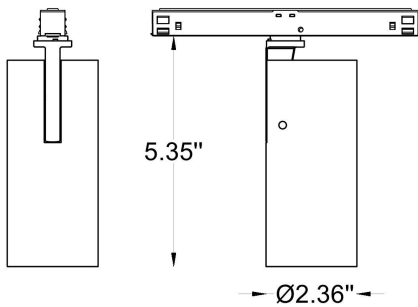

White
Black

HOW TO ORDER:

Example:

CODE:

BY-BLLC-TC-65020-03-K30-C80-B1-WL

CODE:

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65030-03**

Dimensions: Ø: 2.36" (6 cm) x H: 5.35" (13.6 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power: 24W

CCT: **K30** - 3000K

K40 - 4000K

CRI: **C80** - 80

C90 - 90

Beam Angle **B1** - 23.5° = 2 610 lm

and lumens: **B2** - 31° = 2 623 lm

B3 - 47.2° = 2 676 lm


Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

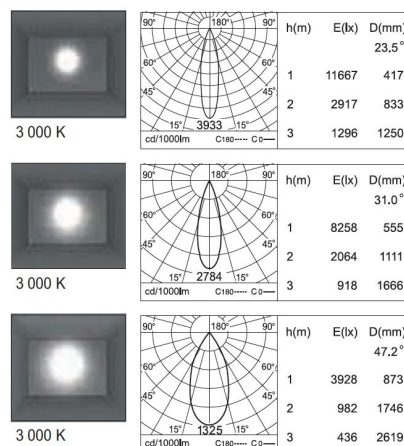

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

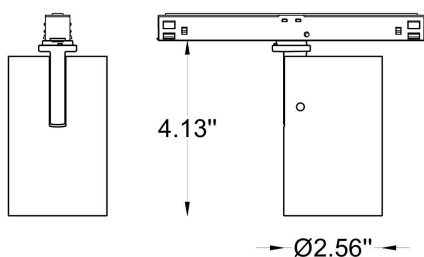

White
Black

HOW TO ORDER:

CODE:

Example:

CODE:

BY-BLLC-TC-65020-03-K30-C80-B1-WL

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - -65030-11

Dimensions: Ø: 2.55" (6.5 cm) x H: 4.13" (10.5 cm)

Housing: AL. Die-Casting, Electrostatic Powder Coating

Reflector: PC (Vacuum Coating)

Light Source: LED (COB)

Power: 14W

CCT: -K30 - 3000K

-K40 - 4000K

CRI: -C80 - 80

-C90 - 90

Beam Angle -B1 - 15.5° = 1 450 lm

and lumens: -B2 - 28.2° = 1 344 lm

-B3 - 39.5° = 1 357 lm


Finish options: -WL - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

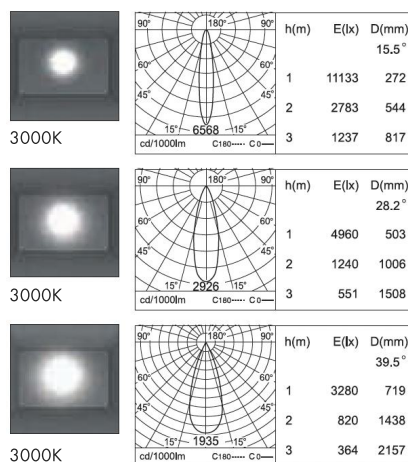

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

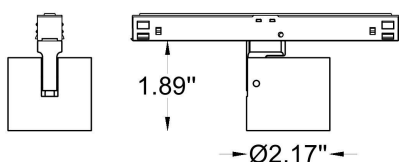

HOW TO ORDER:

Example:
CODE:
BY-BLLC-TC-65020-11-K30-C80-B1-WL

CODE:

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - 65020-11

Dimensions: Ø: 2.16" (5.5 cm) x H: 1.8" (4.8 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: LENS & ABS (Chrome _Non Glare Refelctor)
Light Source: LED
Power: 9W
CCT: **-K30 - 3000K**
-K40 - 4000K
-K50 - 5000K


CRI: **-C80 - 80**
-C90 - 90

Beam Angle **-B1 - 12.5° = 419 lm**
and lumens: **-B2 - 17.5° = 396 lm**
-B3 - 25.5° = 394 lm

Finish options: **-WL - White**
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

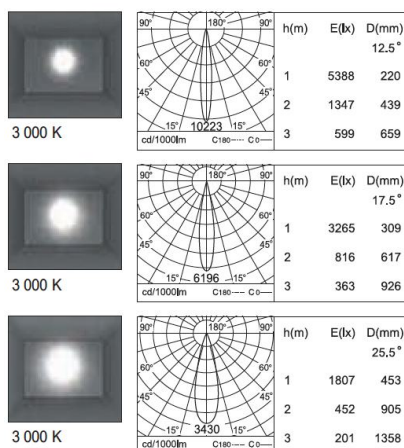

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:

CODE:

BY-BLLC-TC-51220-03-K30-C80-B1-WL

CODE:

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51220-03**

Dimensions: Ø: 2.36" (6 cm) x H: 7.87" (25 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power: 14W

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle **-B1** - 15.5° = 1 318 lm

and lumens: **-B2** - 27.2° = 1 281 lm

-B3 - 37.8° = 1 309 lm


Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

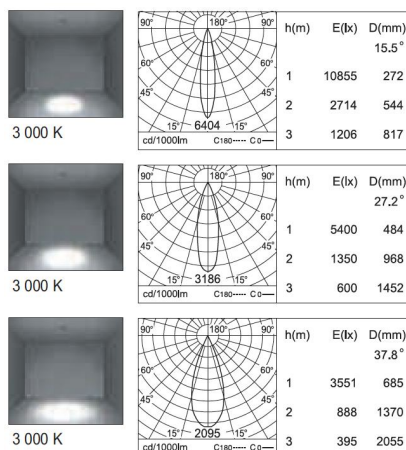

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

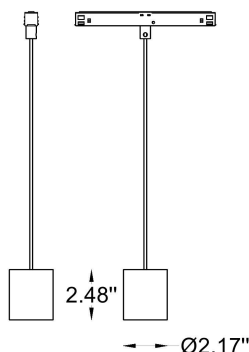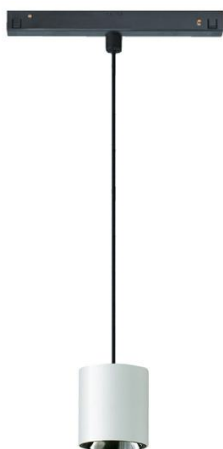

HOW TO ORDER:

Example:

CODE:

BY-BLLC-TC-51220-03-K30-C80-B1-WL

CODE:

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51240-11**

Dimensions: Ø: 2.16" (5.5 cm) x H: 2.1" (5.3 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: LENS & ABS (Chrome _Non Glare Refelctor)

Light Source: LED

Power: 9W

CCT: **-K30** - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle **-B1** - 12.5° = 419 lm

and lumens: **-B2** - 17.5° = 396 lm

-B3 - 25.5° = 394 lm




Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

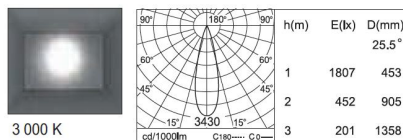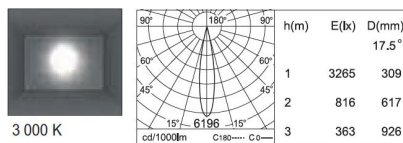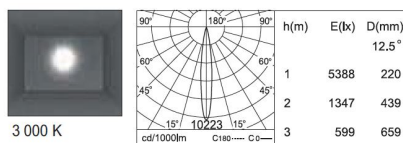

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com



1 877-964-4646

Updated 08/14/2026

PROJECT

SPEC TYPE

NOTES

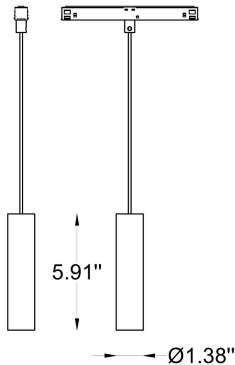

HOW TO ORDER:

Example:
CODE:
BY-BLLC-TC-51220-03-K30-C80-B1-WL

CODE:

3 CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - -51240-03
Dimensions: Ø: 1.37" (3.5 cm) x H: 5.9" (15 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: Lens
Light Source: LED
Power: 9W
CCT: -K30 - 3000K
-K40 - 4000K
-K50 - 5000K


CRI: -C80 - 80
-C90 - 90

Beam Angle -B1 - 12.5° = 419 lm
and lumens: -B2 - 17.5° = 396 lm
-B3 - 25.5° = 394 lm

Finish options: -WL - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

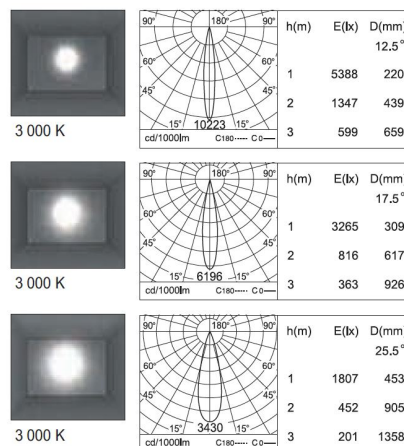

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com



www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

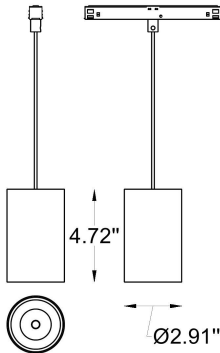

HOW TO ORDER:

Example:
CODE:
BY-BLLC-TC-51220-03-K30-C80-B1-WL

CODE:

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - -51400-11
Dimensions: Ø: 2.9" (7.4 cm) x H: 4.7" (12 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: ABS (Chrome)
Wire: PVC
Light Source: LED (COB)
Power: 20W
CCT: -K30 - 3000K
-K40 - 4000K


CRI: -C80 - 80
-C90 - 90

Beam Angle: -B1 - 21.8° = 1 535 lm
-B2 - 28.5° = 1 526 lm
and lumens: -B3 - 40.0° = 1 708 lm

Finish options: -WL - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

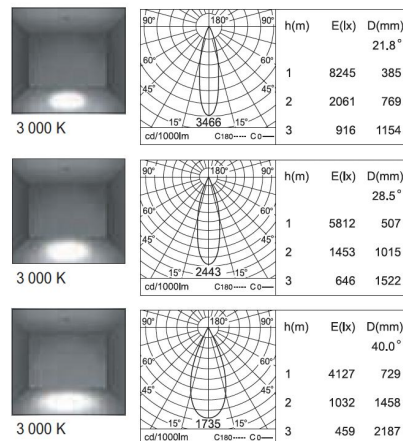

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

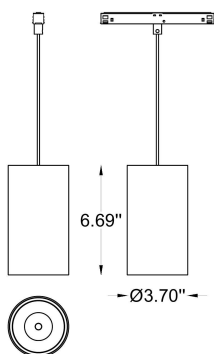

HOW TO ORDER:

Example:

CODE:

BY-BLLC-TC-51220-03-K30-C80-B1-WL

CODE:

3

CHOOSE TRACK MODEL:

GENERAL INFORMATION

CODE - **-51410-11**

Dimensions: Ø: 3.7" (9.4 cm) x H: 4.7" (12 cm)

Housing: AL Die-Casting, Electrostatic Powder Coating

Reflector: ABS (Chrome)

Wire: PVC

Light Source: LED (COB)

Power: 30W

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle 28.9°

Lumens 2 303 lm


Finish options: **-WL** - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

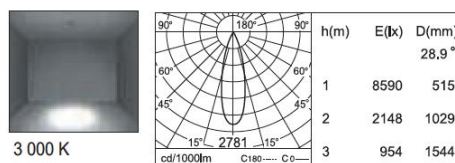

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/14/2026