



TRACK HEADS


(27mm Magnetic Track System)

MODELS:

-F20S

-F10S

BY-BLMN-VND

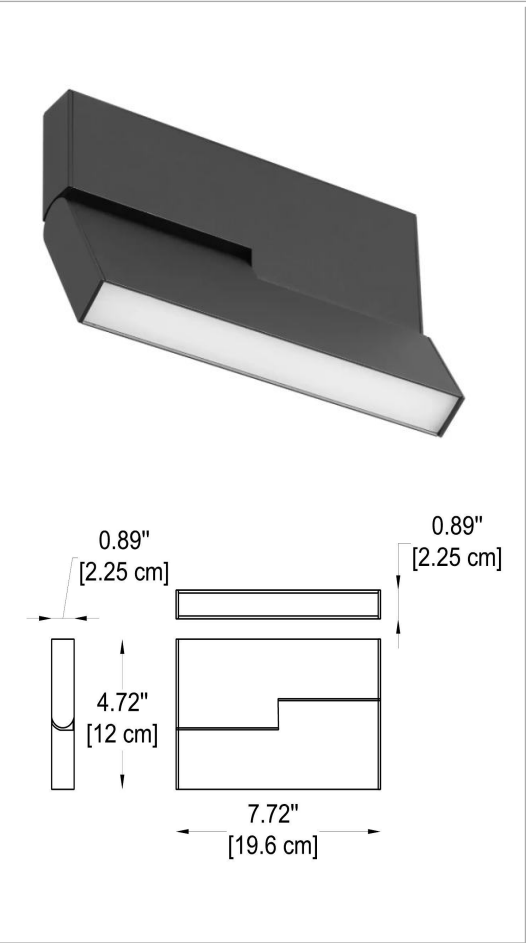

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-F20S

Dimensions:

A) Length -

7.72" (19.6 cm)

B) Height -

4.72" (12 cm)

C) Width -

0.89" (2.25 cm)

Material:

Aliminum

Light Source:

LED / 15W / 808 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27

2700K

-K30

3000K

-K40

4000K

-K50

5000K

CRI:

-C80

80

-C90

90

Finish Options:

-WL

White (RAL9003)

-BL

Black (RAL9005)

-CUS

Custom on request*

Dimming Options:

-DIM

0-10V

-DL

DALI

-TR

TRIAC

-LT

Lutron

-CS


Casambi

Operating temperature range -

-4°F to +104°F

Maintenance of lumen - L80 -

50,000 hours at 77°F

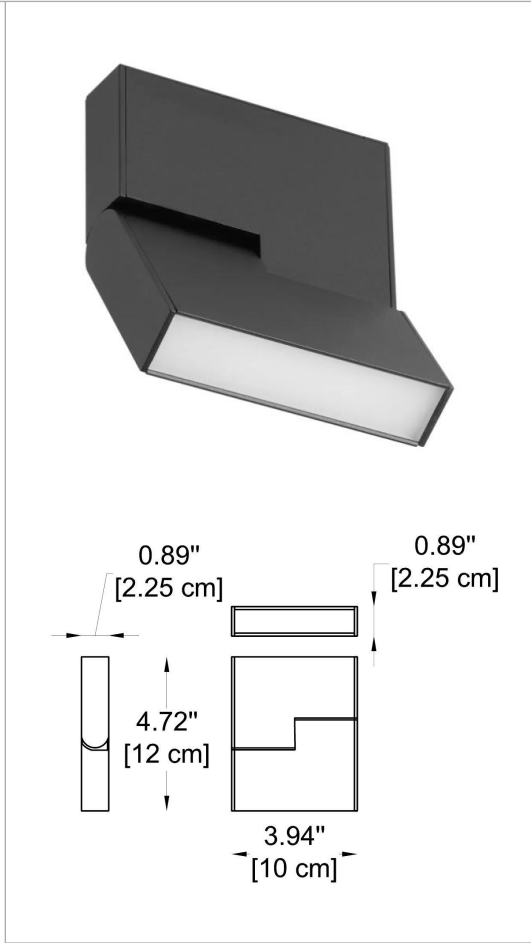

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-F10S

Dimensions:

A) Length -

3.94" (10 cm)

B) Height -

4.72" (12 cm)

C) Width -

0.89" (2.25 cm)

Material:

Aliminum

Light Source:

LED / 8W / 481 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

CCT:

-K27

2700K

-K30 -

3000K

-K40 -

4000K

-K50 -

5000K

CRI:

-C80 -

80

-C90 -

90

Finish Options:

-WL -

White (RAL9003)

-BL -

Black (RAL9005)

-CUS

Custom on request*

Dimming Options:

-DIM -

0-10V

-DL -

DALI

-TR

TRIAC

-LT -

Lutron

-CS -

Casambi

Operating temperature range -

-4°F to +104°F

Maintenance of lumen - L80 -

50,000 hours at 77°F





TRACK HEADS


(27mm Magnetic Track System)

MODELS:

-F12S


-F06S

BY-BLMN-VND

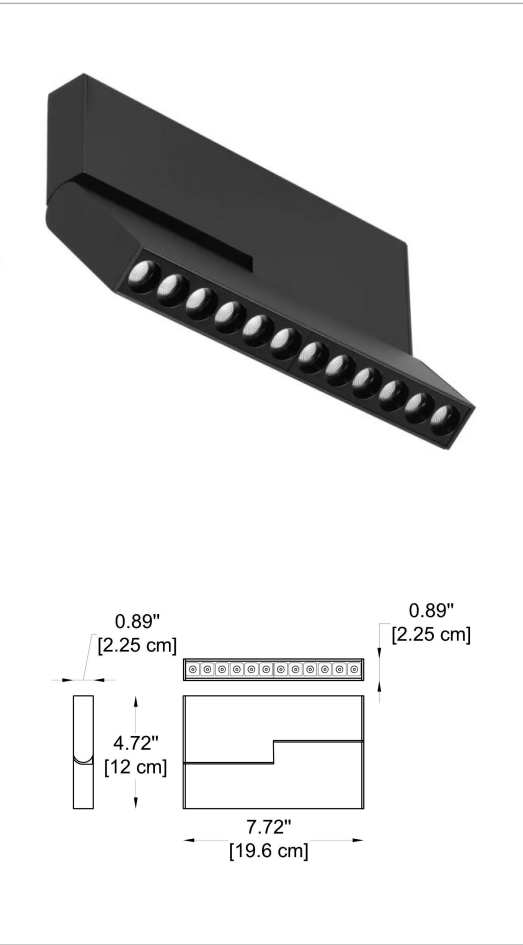

CHOOSE TRACK HEAD:

GENERAL INFORMATION			
CODE -	-F12S		
Dimensions:	A) Length -	7.72"	(19.6 cm)
	B) Height -	4.72"	(12 cm)
	C) Width -	0.89"	(2.25 cm)
Material:	Aliminum		
Light Source:	LED / 16W / 1000 lm / 24Vdc		
Lighting type:	Direct		
Lighting distribution:	Symmetric		
Optical type:	Spot		
Dimmable:	Yes		
Driver:	Remote		
Driver type:	Electronic		
Emergency:	Without		
Insulation class:	III		
Beam Angle:	-B12 -	12°	
	-B34 -	34°	
	-B48 -	48°	
CCT:	-K27	2700K	
	-K30 -	3000K	
	-K40 -	4000K	
	-K50 -	5000K	
CRI:	-C80 -	80	
	-C90 -	90	
Finish Options:	-WL -	White (RAL9003)	
	-BL -	Black (RAL9005)	
	-CUS	Custom on request*	
Dimming Options:	-DIM -	0-10V	
	-DL -	DALI	
	-TR	TRIAC	
	-LT -	Lutron	
	-CS -	Casambi	
Operating temperature range - -20 to +40°C			
Maintenance of lumen - L80 - 50 000 hours at 25 °C			

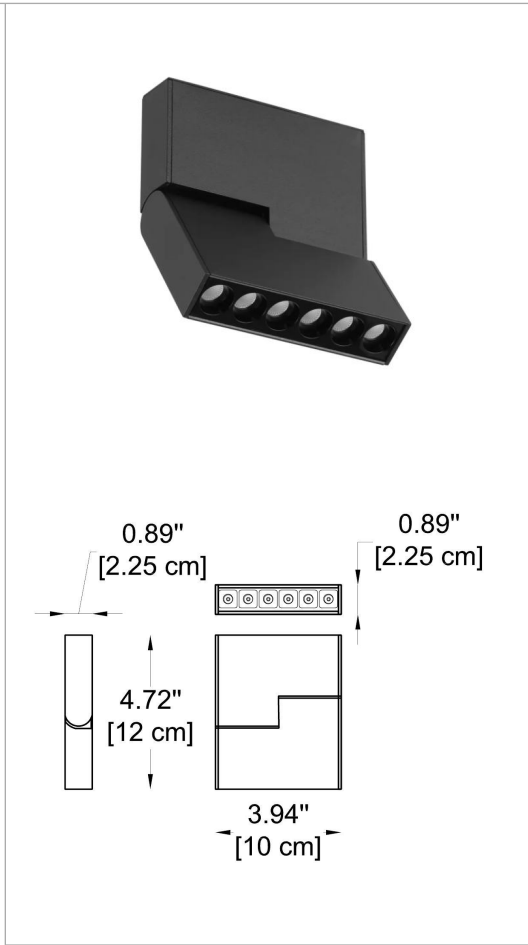

CHOOSE TRACK HEAD:

GENERAL INFORMATION			
CODE -	-F06S		
Dimensions:	A) Length -	3.94"	(10 cm)
	B) Height -	4.72"	(12 cm)
	C) Width -	0.89"	(2.25 cm)
Material:	Aliminum		
Light Source:	LED / 8W / 511 lm / 24Vdc		
Lighting type:	Direct		
Lighting distribution:	Symmetric		
Optical type:	Spot		
Dimmable:	Yes		
Driver:	Remote		
Driver type:	Electronic		
Emergency:	Without		
Insulation class:	III		
Beam Angle:	-B18 -	18°	
	-B34 -	34°	
	-B48 -	48°	
CCT:	-K27	2700K	
	-K30 -	3000K	
	-K40 -	4000K	
	-K50 -	5000K	
CRI:	-C80 -	80	
	-C90 -	90	
Finish Options:	-WL -	White (RAL9003)	
	-BL -	Black (RAL9005)	
	-CUS	Custom on request*	
Dimming Options:	-DIM -	0-10V	
	-DL -	DALI	
	-TR	TRIAC	
	-LT -	Lutron	
	-CS -	Casambi	
Operating temperature range - -20 to +40°C			
Maintenance of lumen - L80 - 50 000 hours at 25 °C			

LED

IP20

90°

MAGNETIC HEAD 24Vdc

LUTRON

CASAMBI



TRACK HEADS

(27mm Magnetic Track System)





MODELS:

-D24S

-D12S

-D06S

BY-BLMN-VND

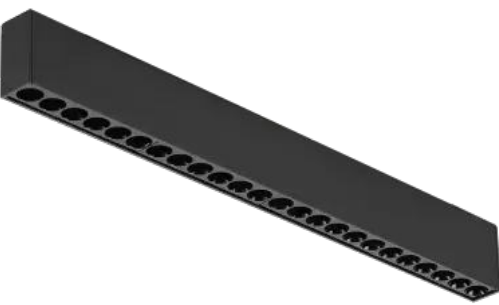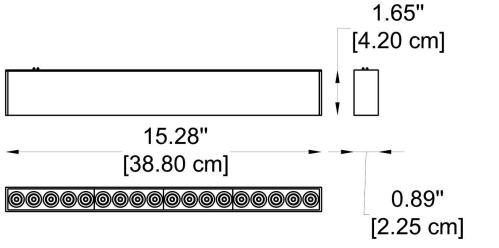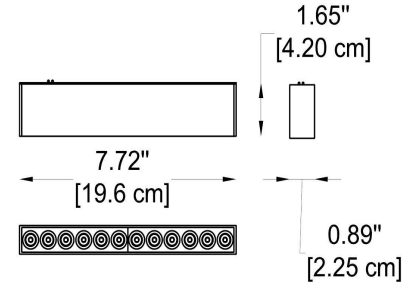 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -D24S Dimensions: A) Length -15.28" (38.8 cm) B) Height -1.65" (4.2 cm) C) Width -0.89" (2.25 cm) Material:Aliminum Light Source:LED / 24W / 1920 lm / 24Vdc Lighting type:Direct Lighting distribution:Symmetric Optical type:Spot Dimmable:Yes Driver:Remote Driver type:Electronic Emergency:Without Insulation class:III Beam Angle: -B12 -12° -B34 -34° -B48 -48° CCT: -K272700K -K303000K -K404000K -K505000K CRI: -C8080 -C9090 Finish Options: -WL -White (RAL9003) -BL -Black (RAL9005) -CUSCustom on request* Dimming Options: -DIM -0-10V -DL -DALI -TR -TRIAC -LT -Lutron -CS -Casambi Operating temperature range - -20 to +40°C Maintenance of lumen - L80 - 50 000 hours at 25 °C	 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -D12S Dimensions: A) Length -7.72" (19.6 cm) B) Height -1.65" (4.2 cm) C) Width -0.89" (2.25 cm) Material:Aliminum Light Source:LED / 12W / 1000 lm / 24Vdc Lighting type:Direct Lighting distribution:Symmetric Optical type:Spot Dimmable:Yes Driver:Remote Driver type:Electronic Emergency:Without Insulation class:III Beam Angle: -B12 -12° -B34 -34° -B48 -48° CCT: -K272700K -K303000K -K404000K -K505000K CRI: -C8080 -C9090 Finish Options: -WL -White (RAL9003) -BL -Black (RAL9005) -CUSCustom on request* Dimming Options: -DIM -0-10V -DL -DALI -TR -TRIAC -LT -Lutron -CS -Casambi Operating temperature range - -20 to +40°C Maintenance of lumen - L80 - 50 000 hours at 25 °C	 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -D06S Dimensions: A) Length -3.94" (10 cm) B) Height -1.65" (4.2 cm) C) Width -0.89" (2.25 cm) Material:Aliminum Light Source:LED / 6W / 380 lm / 24Vdc Lighting type:Direct Lighting distribution:Symmetric Optical type:Spot Dimmable:Yes Driver:Remote Driver type:Electronic Emergency:Without Insulation class:III Beam Angle: -B12 -12° -B34 -34° -B48 -48° CCT: -K272700K -K303000K -K404000K -K505000K CRI: -C8080 -C9090 Finish Options: -WL -White (RAL9003) -BL -Black (RAL9005) -CUSCustom on request* Dimming Options: -DIM -0-10V -DL -DALI -TR -TRIAC -LT -Lutron -CS -Casambi Operating temperature range - -20 to +40°C Maintenance of lumen - L80 - 50 000 hours at 25 °C
PROJECT		PROJECT		PROJECT	
SPEC TYPE		SPEC TYPE		SPEC TYPE	
NOTES		NOTES		NOTES	

LED



IP20











CASAMBI



TRACK HEADS

(27mm Magnetic Track System)


MODELS:

-S50S

-S35S

BY-BLMN-VND



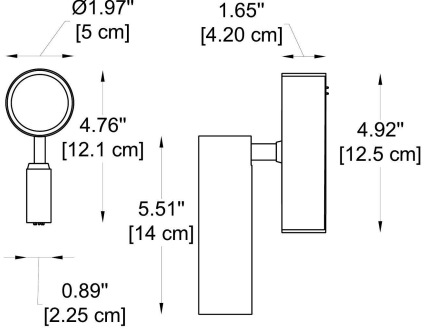

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S50S

Dimensions:

A) Diameter - 1.97" (5 cm)
B) Max. Height - 4.76" (12.1 cm)
C) Head Length - 5.51" (14 cm)

Material:

Aliminum

Light Source:

LED / 10W / 700 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B18 - 18°
-B24 - 24°
-B36 - 36°

CCT:

-K27 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi


Operating temperature range -

-20 to +40°C

Maintenance of lumen - L80 -

50 000 hours at 25 °C



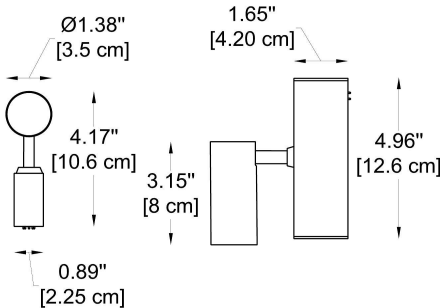

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-S35S

Dimensions:

A) Diameter - 1.38" (3.5 cm)
B) Max. Height - 4.17" (10.6 cm)
C) Head Length - 3.15" (8 cm)

Material:

Aliminum

Light Source:

LED / 5W / 378 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Beam Angle:

-B20 - 20°
-B30 - 30°
-B40 - 40°
-B60 - 60°

CCT:

-K27 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR TRIAC
-LT - Lutron
-CS - Casambi

Operating temperature range -

-20 to +40°C

Maintenance of lumen - L80 -

50 000 hours at 25 °C






TRACK HEADS

(27mm Magnetic Track System)

MODELS:

- L80S
- L40S
- L20S

BY-BLMN-VND

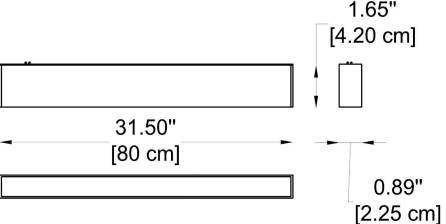 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -L80S Dimensions: A) Length - 31.5" (80 cm) B) Height - 1.65" (4.2 cm) C) Width - 0.89" (2.25 cm) Material: Aliminum Light Source: LED / 30W / 1500 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Diffuse Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III CCT: -K27 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR TRIAC -LT - Lutron -CS - Casambi Operating temperature range - -4°F to +104°F Maintenance of lumen - L80 - 50,000 hours at 77°F
---	---