



FLEX 360 R13 (360 LED NEON FLEXIBLE)

The FLEX 360 FORM Collection is a premium round-profile LED neon flex delivering true 360° omnidirectional illumination with integrated shape-retention capability. Engineered with advanced silicone extrusion technology and an internal support structure, it can be bent and formed while maintaining the desired shape without continuous mounting supports. The seamless silicone housing ensures smooth, dot-free illumination with consistent brightness from every viewing angle. This poseable design allows the creation of suspended forms, curves, and three-dimensional lighting features for architectural and decorative applications. Designed for both indoor and outdoor use, the FLEX 360 FORM series features durable, UV-resistant silicone housing with high ingress protection ratings for long-term reliability. Available in multiple diameters and white light color temperatures, including 2300K, 2700K, 3000K, and 4000K.





MATERIAL:

High Purity Silica Gel

IK RATING:

IK08

VOLTAGE:

48V DC / 24V DC

IP RATING:

IP65

DRIVER POSITION:

Remote

WARRANTY:

5 years

MAIN FEATURES:

Full colour RGBW

Functional and minimalistic design

Skin-friendly surface treatment

Operating Temperature: -13°F to +131°F.

PROJECT

SPEC TYPE

NOTES

LED

IP65



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE


Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026

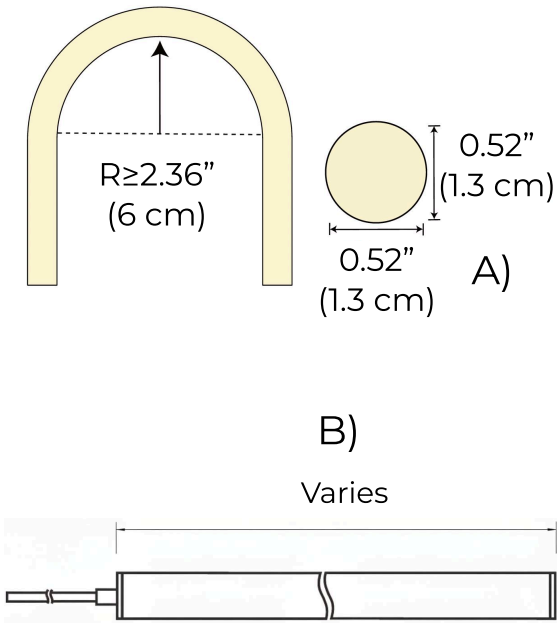

HOW TO ORDER:

Example:

CODE: BY-FLX360R13-CL-LS1-AS-NNR13GH0-

EC-402-02-000000-00001-402-02-000000-00013

BY-FLX360R13-CL-LS1-AS-NNR13GH0-

EC-402-02-000000-00000

1-402-02-000000-00013

1 MODELS:

- A) Diameter - Ø: 0.52" (1.3 cm)
- B) Length - L: Varies

2 LIGHT SOURCE:

CODE	INPUT VOLTAGE	CCT	RATED POWER	CRI	LENGTH	LUMENS	CUTTING
-LS1	24VDC	2300 K	8.6W (2.62W/ft)	90	16.4ft	585 (178/ft)	No cutting 14LED/0.98"
-LS2		2700 K				670 (204/ft)	
-LS3		3000 K				670 (204/ft)	
-LS4		4300 K				670 (204/ft)	
-LSS1	48VDC	2300 K			32.8ft	585 (204/ft)	No cutting 28LED/1.97"
-LSS2		2700 K				670 (204/ft)	
-LSS3		3000 K				670 (204/ft)	
-LSS4		4300 K				670 (204/ft)	


3 ENTRY CABLE:

-ECT



TOP

-ECS




SIDE

4 ACCESSORIES:


-AS-NNR13P-1000

Flat mounting PC groove
L1000*W10.4*H12.5mm



-AS-NNR13P-15

Flat mounting PC groove
1PCS/0.5m



-AS-NNR13DCX-XX

Stealth accessories



PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026



PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-FLX360R13-CL-LS1-AS-NNR13GH0-

EC-402-02-000000-00001-402-02-000000-00013

BY-FLX360R13-CL-LS1-AS-
NNR13GH0-
EC-402-02-000000-0000
1-402-02-000000-00013

4 ACCESSORIES:

-AS-NNR13GH0-EC

End cap



-AS-NNR13CCXS-B-6/4/3

Woven material
ø115*H34mm with screws



-AS-NNR13CCXM-B-6/4/3

Woven material
ø150*H34mm with screws



-AS-NNR13CCXL-B-6/4/3

Woven material
ø175*H34mm with screws



-AS-NNR13C-041

Woven material
ø29*H41mm with screws



-AS-NNR13C-066

Woven material
ø29*H66mm with screws



5 SYSTEM CONTROL:

-402-02-000000-00001

Monochrome Remote Control
R6-1

Operating voltage: 3VDC(Battery CR2032)

Operating frequency: 2.4GHz

Remote control distance: 30m

Operating temperature: -30°C-55°C

Size:L107*W58.5*H9(mm)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026



HOW TO ORDER:

Example:

CODE: BY-FLX360R13-CL-LS1-AS-NNR13GH0-

EC-402-02-000000-00001-402-02-000000-00013

BY-FLX360R13-CL-LS1-AS-
NNR13GH0-
EC-402-02-000000-0000
1-402-02-000000-00013

5 SYSTEM CONTROL:

-402-0-000000-00013

Knob panel controller used for
dimming to warm

CPI-GBB

Input voltage: 12-24VDC

Input current: 6A*1CH

Operating temperature: -30°C-55°C

Size: L86*W86*H33(mm)



-402-02-000000-00013

Monochrome Control Receiver

CRI-GBA

Input voltage: 12-48VDC

Maximum load current: 15A*1CH, Max15A@12/24V

10A *1CH, Max10A@36/48V

Maximum load power: 15A*1CH, Max15A@12/24V

10A *1CH, Max10A@36/48V

Operating temperature: -30°C-55°C

Size: L175*W45*H27(mm)



PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646