




MANGO (track head)

The Mango Non-Magnetic Track collection offers sleek 1-Circuit and 3-Circuit track profiles in sizes of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Designed for 110-277V voltage, these tracks come in white, black, or gray finishes with a durable aluminum (AL) electrostatic powder coating.

The collection includes two spotlights, each measuring Ø 4.13" (6.5 cm) x H 6.35" (16 cm), with wattage options of 28W or 45W. The spotlights are available in CCT ranges of 3000K, 4000K, and 5000K, and come with CRI options of 80 or 90.

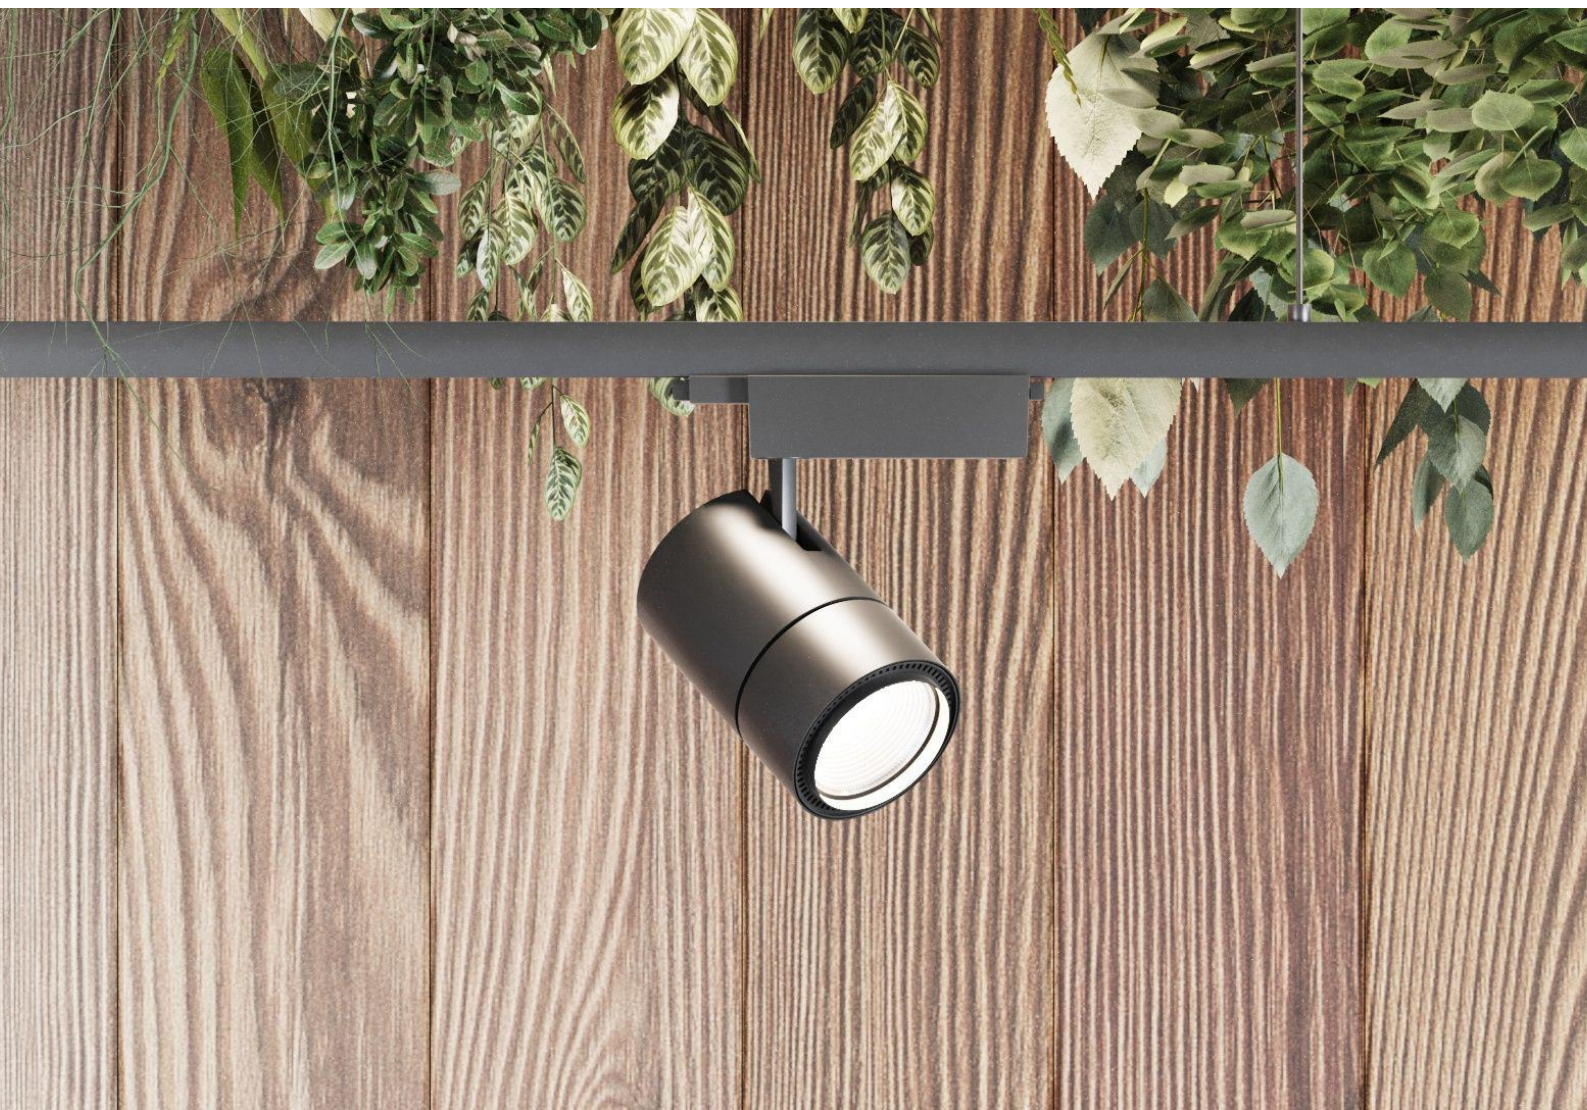

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE: BY-MNG-TC-65141-K30-C80-B1-WL

CODE:

65141-K30-
C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65141**

Dimensions: Ø: 4.13" (6.5 cm) x H: 6.35" (16 cm)
Housing: AL Extrude, Electrostatic Powder Coating
Reflector: AL Anodized Specular Silver
Gear Box: AL Die-Casting, Electrostatic Powder Coating
Light Source: LED (COB)
Power: 28W
Output Current 700 mA

CCT: **-K30** - 3000K
-K40 - 4000K




CRI: **-C80** - 80
-C90 - 90

Beam Angle **-B1** - 20.4° = 2696 lm
and lumens: **-B2** - 28.2° = 1344 lm

Finish options: **-WL** - White
-BL - Black
-GR - Gray

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

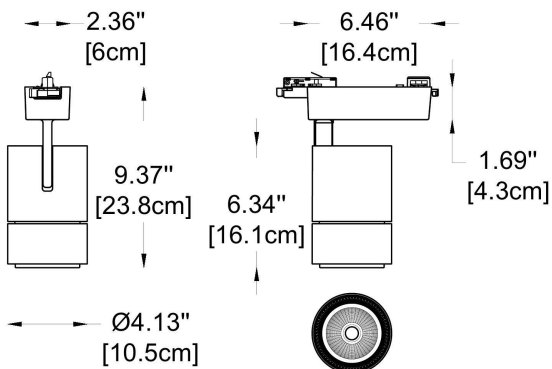

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:

CODE: BY-MNG-TC-65141-K30-C80-B1-WL

CODE:

BY-50-TR-
BL1-01-65141-
K30-C80-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65142**

Dimensions: Ø: 4.13" (6.5 cm) x H: 6.35" (16 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: AL. Anodized Specular Silver

Gear Box: AL. Die-Casting, Electrostatic Powder Coating

Light Source: LED (COB)

Power: 45W

Output Current 1150 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle **-B1** - 24.3° = 4186 lm

and lumens: **-B2** - 37° = 4221 lm

Finish options: **-WL** - White



-BL - Black

-GR - Gray

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026