







TRACK HEADS

(39mm Magnetic Track System)

MODELS:
-DOT3-D9
-DOT-06-D9
-DOT-16-D9

BY-BCRV-TC

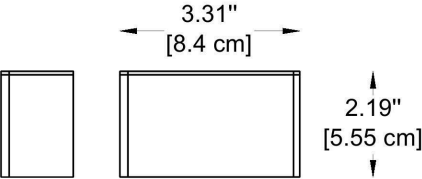	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -DOT3-D9 Dimensions: A) Length - 3.30" (8,4 cm) B) Height - 2.18" (5.5 cm) C) Width - 1.33" (3.4 cm) Material: Aluminum Light Source: LED / 4W / 280 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 0,33 Beam Angle: -B12 - 12° -B34 - 34° -B48 - 48° CCT: -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI Operating temperature range - -20 to +40°C
--	--





TRACK HEAD


(39mm Magnetic Track System)

MODEL:
-GL-D9

BY-BCRV-TC

Example:
CODE FOR HEAD: -GL-D9-K30-C80-WL-DIM

GL-D9-K30-C80-WL-DIM

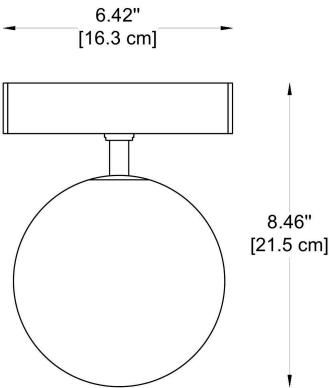

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-GL-D9	
Dimensions:	A) Length - 6.42" (16.3 cm) B) Height - 2.2" (21.5 cm)	
Material:	Aluminum	
Light Source:	LED / 5W / 278 lm / 24Vdc	
Lighting type:	Direct	
Lighting distribution:	Symmetric	
Optical type:	Diffuse	
Dimmable:	Yes	
Driver:	Remote	
Driver type:	Electronic	
Emergency:	Without	
Insulation class:	III	
Weight (lb)	1,37	
CCT:	-K30 - 3000K -K40 - 4000K -K50 - 5000K	☐ ☐ ☐
CRI:	-C80 - 80 -C90 - 90	☐ ☐
Finish Options:	-WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request*	☐ ☐ ☐
Dimming Options:	-DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	☐ ☐ ☐ ☐ ☐

Operating temperature range - -20 to +40°C

LED

IP20

LUTRON

CASAMBI



WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646




TRACK HEADS

(39mm Magnetic Track System)

MODELS:
-35-R-D9
-5-R-D9

BY-BCRV-TC

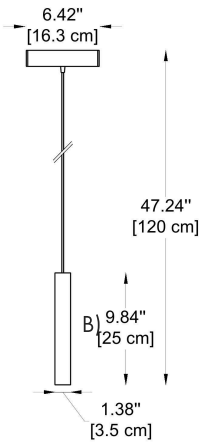

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-35-R-D9

Dimensions:

A) Diameter - 1.38" (3.5 cm)
B) Height - 9.84" (25 cm)
C) Canopy - 1.34" (16.3 cm)
D) Max. Height - 47.24" (120 cm)

Material:

Aliminum

Light Source:

LED / 5W / 378 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,37

Beam Angle:

-B18 - 18°

-B24 - 24°

-B36 - 38°

CCT:

-K27 - 2700K

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS - Custom on request*

Dimming Options:


-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LU - LUTRON

-CS - CASAMBI

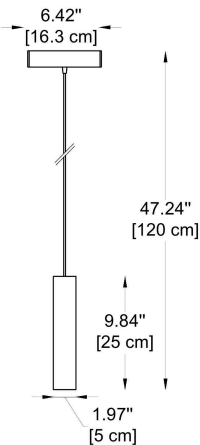

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-5-R-D9

Dimensions:

A) Diameter - 1.97" (5 cm)
B) Height - 9.84" (25 cm)
C) Canopy - 6.42" (16.3 cm)
D) Max. Height - 47.24" (120 cm)

Material:

Aliminum

Light Source:

LED / 10W / 692 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,37

Beam Angle:

-B18 - 18°

-B24 - 24°

-B36 - 36°

CCT:

-K27 - 2700K

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS - Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LU - LUTRON

-CS - CASAMBI





TRACK HEADS

(39mm Magnetic Track System)




MODELS:

-35-T-D9

-50-D9

-30-D9

BY-BCRV-TC

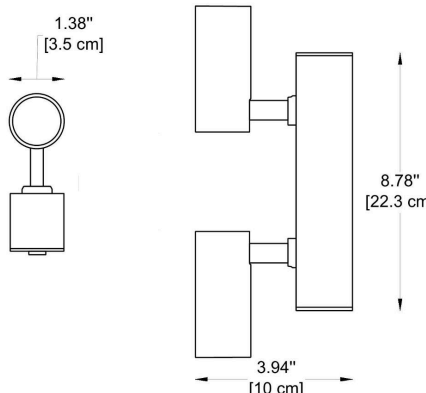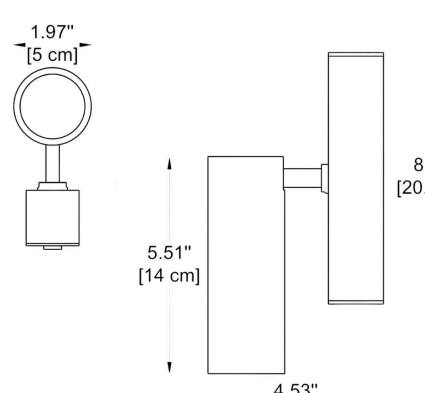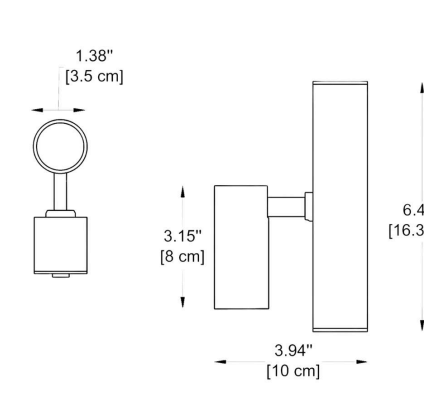 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -35-T-D9 Dimensions: A) Lenght - 8.78" (22.3 cm) B) Height - 3.94" (10 cm) C) Diameter - 1.38" (3.5 cm) Material: Aliminum Light Source: LED / 2x5W / 700 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 1,21 Beam Angle: -B20 - 20° -B30 - 30° -B40 - 40° -B60 - 60° CCT: -K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -50-D9 Dimensions: A) Canopy Lenght - 8.19" (20.8 cm) B) Head Lenght - 5.51" (14 cm) C) Height - 4.53" (11.5 cm) D) Diameter - 1.97" (5 cm) Material: Aliminum Light Source: LED / 10W / 700 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 1,21 Beam Angle: -B18 - 18° -B24 - 24° -B36 - 36° CCT: -K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -30-D9 Dimensions: A) Canopy Lenght - 8.19" (16.3 cm) B) Head Lenght - 3.15" (8 cm) C) Height - 3.94" (10 cm) D) Diameter - 1.38" (3.5 cm) Material: Aliminum Light Source: LED / 5W / 378 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 1,21 Beam Angle: -B18 - 20° -B24 - 30° -B36 - 40° -B60 - 60° CCT: -K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI
PROJECT		PROJECT		PROJECT	
SPEC TYPE		SPEC TYPE		SPEC TYPE	
NOTES		NOTES		NOTES	

LED

IP20

CASAMBI




TRACK HEADS

(39mm Magnetic Track System)

MODELS:
-65-R-D9
-95-R-D9

BY-BCRV-TC

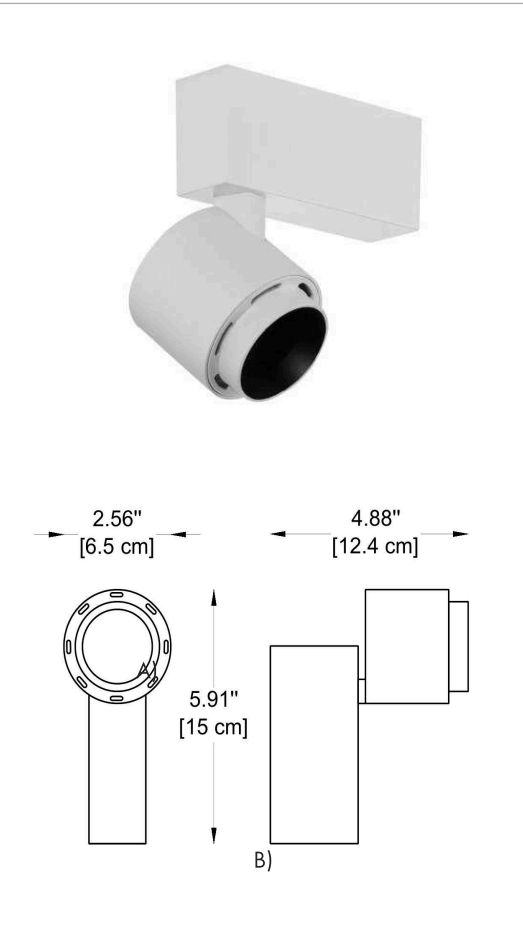


PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION			
CODE -	-65-R-D9		
Dimensions:	A) Diameter - 2.56" (6.5 cm) B) Lenght - 5.91" (15 cm) C) Height - 4.88" (12.4 cm)		
Material:	Aliminum		
Light Source:	LED / 8W / 276 lm / 24Vdc		
Lighting type:	Direct		
Lighting distribution:	Symmetric		
Optical type:	Spot		
Dimmable:	Yes		
Driver:	Remote		
Driver type:	Electronic		
Emergency:	Without		
Insulation class:	III		
Weight (lb)	1,1		
Beam Angle:	-B20 - 20° -B30 - 30° -B40 - 40°	☐ ☐ ☐	
CCT:	-K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K	☐ ☐ ☐ ☐	
CRI:	-C80 - 80 -C90 - 90	☐ ☐	
Finish Options:	-WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request*	☐ ☐ ☐	
Dimming Options:	-DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	☐ ☐ ☐ ☐ ☐	

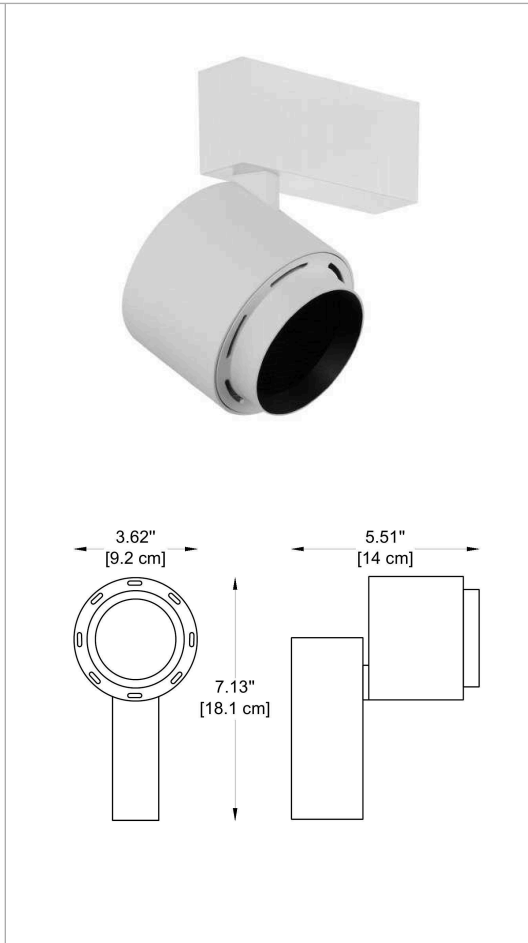

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION			
CODE -	-95-R-D9		
Dimensions:	A) Diameter - 3.62" (9.2 cm) B) Lenght - 7.13" (18.1 cm) C) Height - 5.51" (14 cm)		
Material:	Aliminum		
Light Source:	LED / 15W / 625 lm / 24Vdc		
Lighting type:	Direct		
Lighting distribution:	Symmetric		
Optical type:	Spot		
Dimmable:	Yes		
Driver:	Remote		
Driver type:	Electronic		
Emergency:	Without		
Insulation class:	III		
Weight (lb)	1,52		
Beam Angle:	-B20 - 20° -B30 - 30° -B40 - 40°	☐ ☐ ☐	
CCT:	-K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K	☐ ☐ ☐ ☐	
CRI:	-C80 - 80 -C90 - 90	☐ ☐	
Finish Options:	-WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request*	☐ ☐ ☐	
Dimming Options:	-DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	☐ ☐ ☐ ☐ ☐	

