



PICO-L (BY-PC-L-RL) is a compact linear LED module designed for BYIBA's 17 mm track system. Its slim aluminum housing and 115° beam provide broad illumination for shelving, cabinetry, and retail displays.

Available in 10, 30, and 60 cm lengths, it delivers warm 3000K light using a 24V DC external driver. Black and anodized aluminum finishes complement a variety of interior styles.





PROJECT

SPEC TYPE

NOTES

MATERIAL:

Aluminum

LIGHTING:

LED: SMD

VOLTAGE:

24V DC

IP RATING:

IP20

APPLIANCE CLASS:

III

CRI:

CRI 80

DRIVER POSITION:

External

WARRANTY:

5 years

CERTIFICATES:

ETL Listed(UL 2108 and CSA C22.2 No. 9.0)

LED

24V
DC

IP20

III

STANDARD



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

HOW TO ORDER:
Example:
CODE: BY-PC-L-RL-ABL

1 DIMENSIONS:

Width - W: 0.67" (1.7 cm)
Height - H: 0.55" (1.4 cm)

2 MODELS:

-A
Length - L: 3.94" (10 cm)
LIGHT SOURCE:
LED / 1.1W / 24V DC/ CRI 80 / 3000K /110 lm / 115°





-B
Length - L: 11.81" (30 cm)
LIGHT SOURCE:
LED / 4.2W / 24V DC/ CRI 80 / 3000K /330 lm / 115°

-C
Length - L: 23.62" (60 cm)
LIGHT SOURCE:
LED / 8W / 24V DC/ CRI 80 / 3000K /660 lm / 115°

-D SIDEFEED
Length - L: 3.94" (10 cm)
LIGHT SOURCE:
LED / 1.1W / 24V DC/ CRI 80 / 3000K /110 lm / 115°

3 FINISH OPTIONS:

-BL Black
-AAL Anodized Alum.

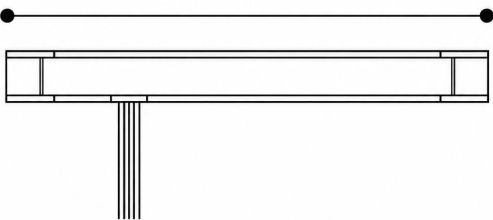

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.