




SPAKKO
(wall)

BY-2369A-PL

PROJECT

SPEC TYPE

NOTES

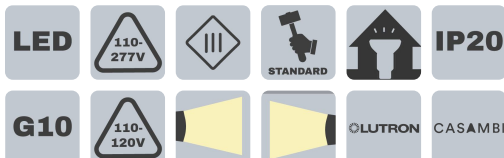

GENERAL INFORMATION:

The SPAKKO 2369A by BYIBA is a minimalist wall-recessed luminaire crafted from CRISTALY®, a patented, eco-friendly material known for its durability and versatility. Designed for indirect upward lighting, it features a central slot with smooth edges, seamlessly integrating into various interior settings. The fixture is compatible with GU10 35mm LEDs and also offers 13W LED module (700mA) options in 2700K (1500lm, CRI90), 3000K (1600lm, CRI90), and 4000K (1700lm, CRI90), requiring a remote driver (not included). Measuring 13.98" x 12.01" with a recess depth of 2.56", the SPAKKO 2369A is ideal for drywall installations and can be customized with water-based paints to match any décor, with an optional housing box available for brickwork installations.

MATERIAL:

CRISTALY®

FINISHING:

White / Paintable

LIGHTING:

LED / GU10

INPUT VOLTAGE:

110-277 (for LED versions) / 110-120V (for GU10 version)

IP RATING:

20

DRIVER POSITION:

Remote

INSULATION CLASS:

III

CRI:

CRI90

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES

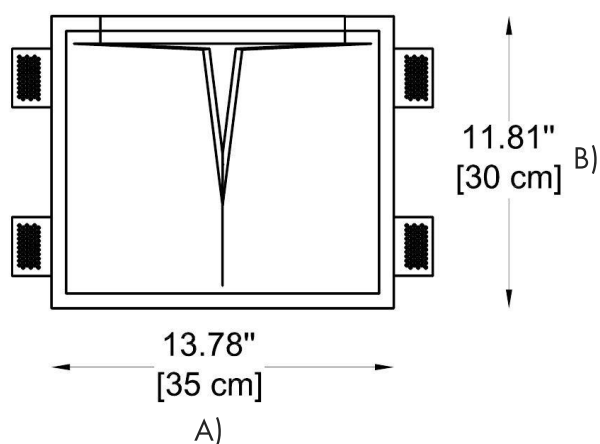

HOW TO ORDER:

Example:

CODE: BY-2369A-PL-LS1-K27-DIM

CODE:

BY-2369A-PL-
LS1-K27-DIM

1 DIMENSIONS:

A) Length L: 13.78" (35 cm)

B) Height - H: 11.81" (30 cm)

2 LIGHT SOURCE:

-LS1 LED / 13W / 700mA / 110-277V

-LS2 GU 10 / max. 5W / 110-120V

3 CCT and LUMENS: (only for LER versions)

-K27 2700K = 1500 lm

-K30 3000K = 1600 lm

-K40 4000K = 1700 lm

4 DIMMING OPTIONS: (only for LER versions)

-DIM 0-10V

-DALI DALI


-LT Lutron

-CS Casambi

-WF WI-FI

-NON Non-Dimmable

5 ACCESSORIES:



Housing Box

13.98" x 12.01" x 1.97"

15.16" x 13.19" x 2.36" - Hole

WWW.BULLARDCOLLECTION.COM

TECHNICAL

OUTDOOR

DECORATIVE



WE WELCOME ALL CUSTOM ORDERS

CONTACT US:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646