




FLOW S COLLECTION (track head)

The Flow S Non-Magnetic Track Collection offers 1-Circuit and 3-Circuit surface-mounted track profiles available in three lengths—39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm)—with a voltage of 110-277V. Available in White or Black, with an electrostatic powder-coated aluminum finish.

The collection includes four spotlight models:

- Ø: 3.74" (9.5 cm) x H: 1.4" (3.5 cm)
- Ø: 4.3" (11 cm) x H: 2" (5 cm)
- Ø: 2.36" (6 cm) x H: 5.3" (13.5 cm)
- Ø: 3.62" (9.2 cm) x H: 2.36" (6 cm)


Spotlights are offered in CCT options of 3000K, 4000K, and 5000K, with CRI ratings of 80 or 90, and are available in White or Black finishes. Ideal for indoor applications.

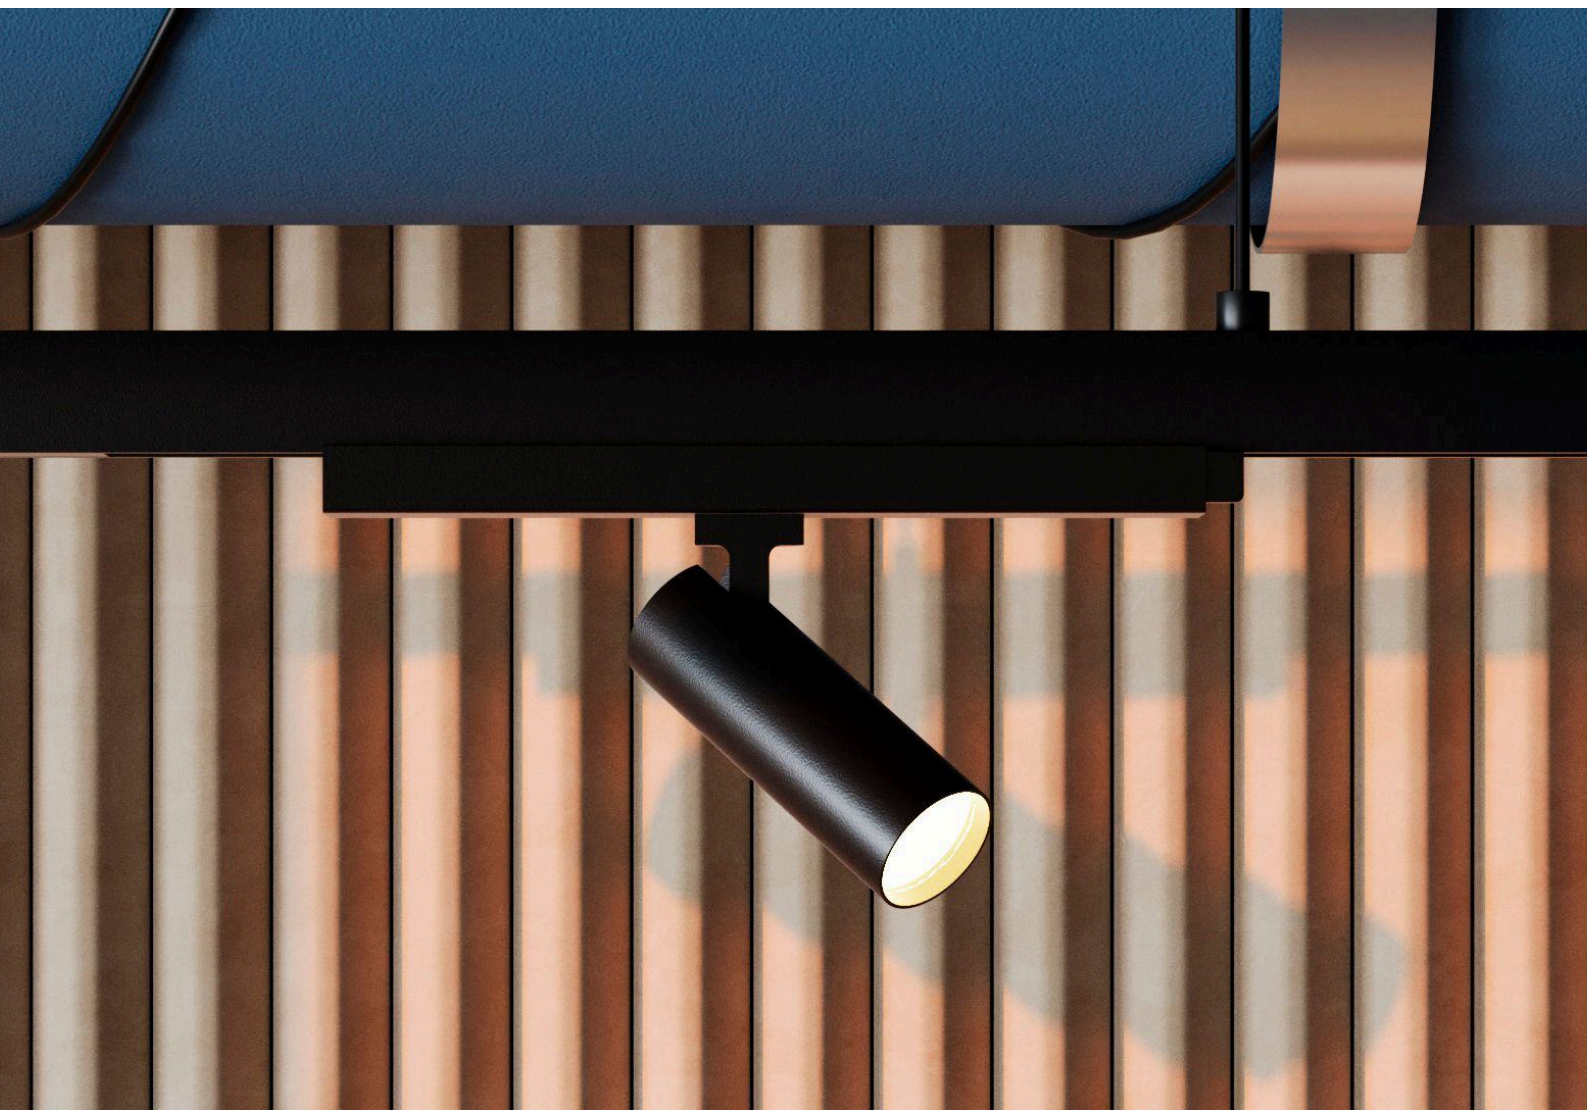

PROJECT

SPEC TYPE

NOTES

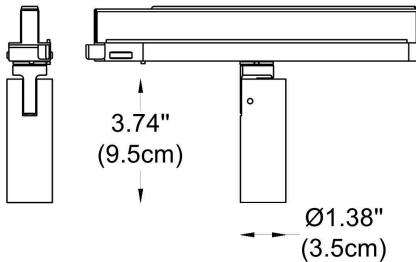

HOW TO ORDER:

Example:
CODE: BY-FLW-TC-65020-01-K30-C80-B1-WL

CODE:

65020-01-K30-C80-B1-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65020-01**

Dimensions: Ø: 1.4" (3.5 cm) x H: 3.74" (9.5 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: Lens
Light Source: LED
Power: 9W
Output Current 450 mA

CCT: **-K30** - 3000K
-K40 - 4000K
-K50 - 5000K


CRI: **-C80** - 80
-C90 - 90

Beam Angle **-B1** - 12.5° = 419 lm
and lumens: **-B2** - 17.5° = 396 lm
-B3 - 25.5° = 394 lm

Finish options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

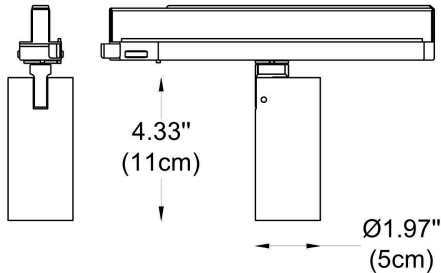

HOW TO ORDER:

Example:
CODE: BY-FLW-TC-65020-01-K30-C80-B1-WL

CODE:

65020-01-K30-C80-B1-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65070-07**

Dimensions: Ø: 2" (5 cm) x H: 4.3" (11 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: PC (Vacuum Coating)
Light Source: LED (COB)
Power: 15W
Output Current 350 mA

CCT: **-K30** - 3000K
-K40 - 4000K


CRI: **-C80** - 80
-C90 - 90

Beam Angle **-B1** - 13.8° = 1184 lm
and lumens: **-B2** - 23.3° = 1252 lm
-B3 - 38.5° = 1032 lm

Finish options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

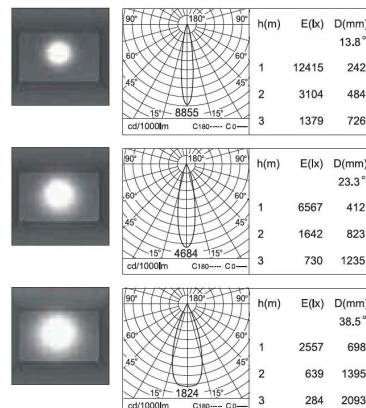

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

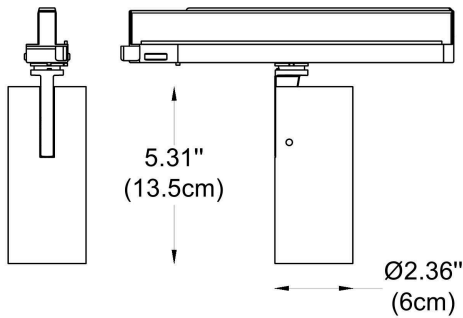

HOW TO ORDER:

Example:
CODE: BY-FLW-TC-65020-01-K30-C80-B1-WL

CODE:

65020-01-K30-
C80-B1-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65030-01**

Dimensions: Ø: 2.36" (6 cm) x H: 5.3" (13.5 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Reflector: Lens
Light Source: LED (COB)
Power: 21W
Output Current 600 mA

CCT: **-K30** - 3000K
-K40 - 4000K


CRI: **-C80** - 80
-C90 - 90

Beam Angle **-B1** - 23.5° = 2610 lm
and lumens: **-B2** - 31° = 2623 lm
-B3 - 47.2° = 2676 lm

Finish options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026


PROJECT

SPEC TYPE

NOTES



ZOOM

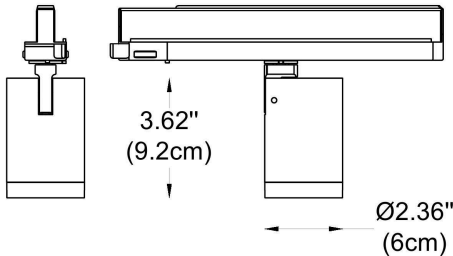

HOW TO ORDER:

Example:
CODE: BY-FLW-TC-65020-01-K30-C80-B1-WL

CODE:

65020-01-K30-
C80-B1-WL

1 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65030-07**

Dimensions: Ø: 2.36" (6 cm) x H: 3.62" (9.2 cm)

Housing: AL. Extrude, Electrostatic Powder Coating

Reflector: Lens

Light Source: LED (COB)

Power: 17W

Output Current 400 mA

CCT: **-K30** - 3000K

-K40 - 4000K

CRI: **-C80** - 80

-C90 - 90

Beam Angle: -15.2~47.9°

Finish options: **-WL** - White

-BL - Black



Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C


PHOTOMETRICS:



Zoom IN



Zoom OUT



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026