






TRACK HEADS

(27mm Magnetic Track System)

MODELS:
-DOT3-D9
-DOT-06-D9
-LINEAR-16-D9

BY-BC-TC

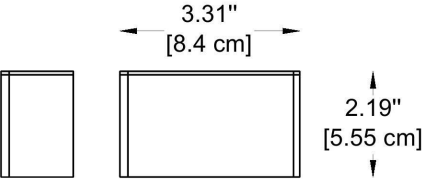  	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -DOT3-D9 Dimensions: A) Length - 3.30" (8,4 cm) B) Height - 2.18" (5.5 cm) C) Width - 1.33" (3.4 cm) Material: Aluminum Light Source: LED / 4W / 280 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 0,33
---	--

Beam Angle:

-B12 - 12°
-B34 - 34°
-B48 - 48°

CCT:

-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI:

-C80 - 80
-C90 - 90


Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS - Custom on request*

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LU - LUTRON
-CS - CASAMBI

Operating temperature range - -20 to +40°C





TRACK HEAD


(27mm Magnetic Track System)

MODEL:
-GL-D9

BY-BC-TC

Example:
CODE FOR HEAD: -GL-D9-K30-C80-WL-DIM

GL-D9-K30-
C80-WL-DIM

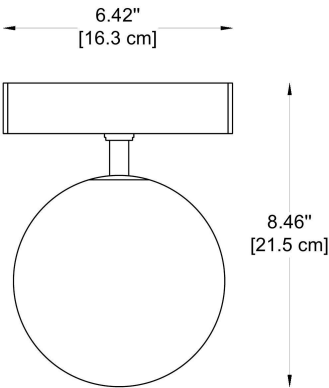

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-GL-D9

Dimensions:

A) Length - 6.42" (16.3 cm)
B) Height - 2.2" (21.5 cm)

Material:

Aluminum

Light Source:

LED / 5W / 278 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Diffuse

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,37

CCT:

-K30 - 3000K

☐

-K40 - 4000K

☐

-K50 - 5000K

☐

CRI:

-C80 - 80

☐

-C90 - 90

☐

Finish Options:

-WL - White (RAL9003)

☐

-BL - Black (RAL9005)

☐

-CUS - Custom on request*

☐

Dimming Options:

-DIM - 0-10V

☐

-DL - DALI

☐

-TR - TRIAC

☐

-LU - LUTRON

☐

-CS - CASAMBI

☐

Operating temperature range - -20 to +40°C



WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646




TRACK HEADS

(27mm Magnetic Track System)

MODELS:
-35-R-D9
-5-R-D9

BY-BC-TC

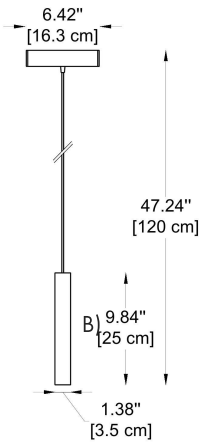

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-35-R-D9

Dimensions:

A) Diameter - 1.38" (3.5 cm)
B) Height - 9.84" (25 cm)
C) Canopy - 1.34" (16.3 cm)
D) Max. Height - 47.24" (120 cm)

Material:

Aliminum

Light Source:

LED / 5W / 378 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,37

Beam Angle:

-B18 - 18°
-B24 - 24°
-B36 - 38°

☐
☐
☐

CCT:

-K27 - 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

☐
☐
☐
☐

CRI:

-C80 - 80
-C90 - 90

☐
☐

Finish Options:


-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS - Custom on request*

☐
☐
☐

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LU - LUTRON
-CS - CASAMBI

☐
☐
☐
☐
☐

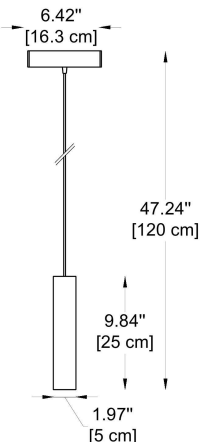

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-5-R-D9

Dimensions:

A) Diameter - 1.97" (5 cm)
B) Height - 9.84" (25 cm)
C) Canopy - 6.42" (16.3 cm)
D) Max. Height - 47.24" (120 cm)

Material:

Aliminum

Light Source:

LED / 10W / 692 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,37

Beam Angle:

-B18 - 18°
-B24 - 24°
-B36 - 36°

☐
☐
☐

CCT:

-K27 - 2700K
-K30 - 3000K
-K40 - 4000K
-K50 - 5000K

☐
☐
☐
☐

CRI:

-C80 - 80
-C90 - 90

☐
☐

Finish Options:

-WL - White (RAL9003)
-BL - Black (RAL9005)
-CUS - Custom on request*

☐
☐
☐

Dimming Options:

-DIM - 0-10V
-DL - DALI
-TR - TRIAC
-LU - LUTRON
-CS - CASAMBI

☐
☐
☐
☐
☐





TRACK HEADS

(27mm Magnetic Track System)




MODELS:

-35-T-D9

-50-D9

-30-D9

BY-BC-TC

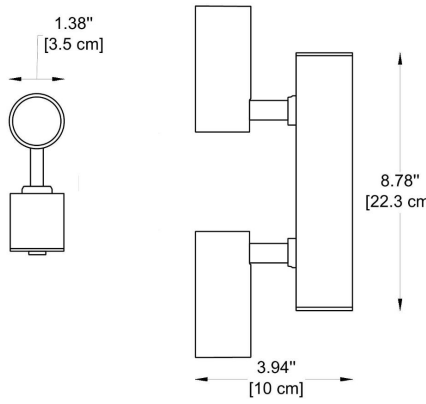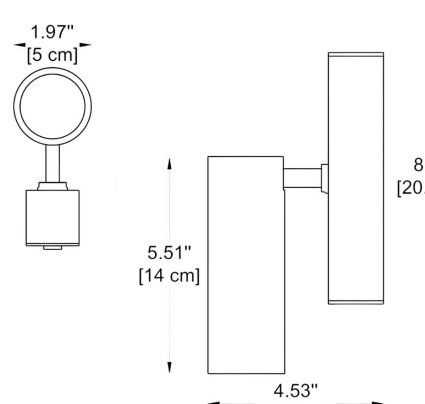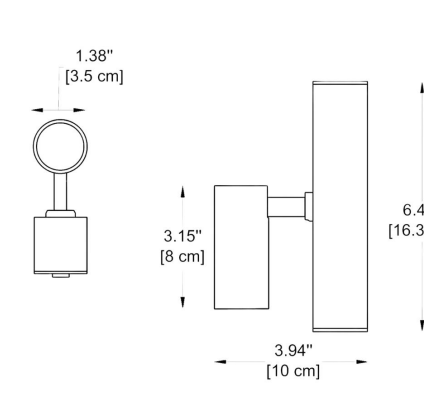 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -35-T-D9 Dimensions: A) Lenght - 8.78" (22.3 cm) B) Height - 3.94" (10 cm) C) Diameter - 1.38" (3.5 cm) Material: Aluminum Light Source: LED / 2x5W / 700 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 1,21 Beam Angle: -B20 - 20° -B30 - 30° -B40 - 40° -B60 - 60° CCT: -K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	PROJECT SPEC TYPE NOTES
 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -50-D9 Dimensions: A) Canopy Lenght - 8.19" (20.8 cm) B) Head Lenght - 5.51" (14 cm) C) Height - 4.53" (11.5 cm) D) Diameter - 1.97" (5 cm) Material: Aluminum Light Source: LED / 10W / 700 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 1,21 Beam Angle: -B18 - 18° -B24 - 24° -B36 - 36° CCT: -K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	PROJECT SPEC TYPE NOTES
 	CHOOSE TRACK HEAD: GENERAL INFORMATION CODE - -30-D9 Dimensions: A) Canopy Lenght - 8.19" (16.3 cm) B) Head Lenght - 3.15" (8 cm) C) Height - 3.94" (10 cm) D) Diameter - 1.38" (3.5 cm) Material: Aluminum Light Source: LED / 5W / 378 lm / 24Vdc Lighting type: Direct Lighting distribution: Symmetric Optical type: Spot Dimmable: Yes Driver: Remote Driver type: Electronic Emergency: Without Insulation class: III Weight (lb) 1,21 Beam Angle: -B18 - 20° -B24 - 30° -B36 - 40° -B60 - 60° CCT: -K27 - 2700K -K30 - 3000K -K40 - 4000K -K50 - 5000K CRI: -C80 - 80 -C90 - 90 Finish Options: -WL - White (RAL9003) -BL - Black (RAL9005) -CUS - Custom on request* Dimming Options: -DIM - 0-10V -DL - DALI -TR - TRIAC -LU - LUTRON -CS - CASAMBI	PROJECT SPEC TYPE NOTES

LED

IP20

CASAMBI



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.




TRACK HEADS

(27mm Magnetic Track System)

MODELS:
-65-R-D9
-92-R-D9

BY-BC-TC

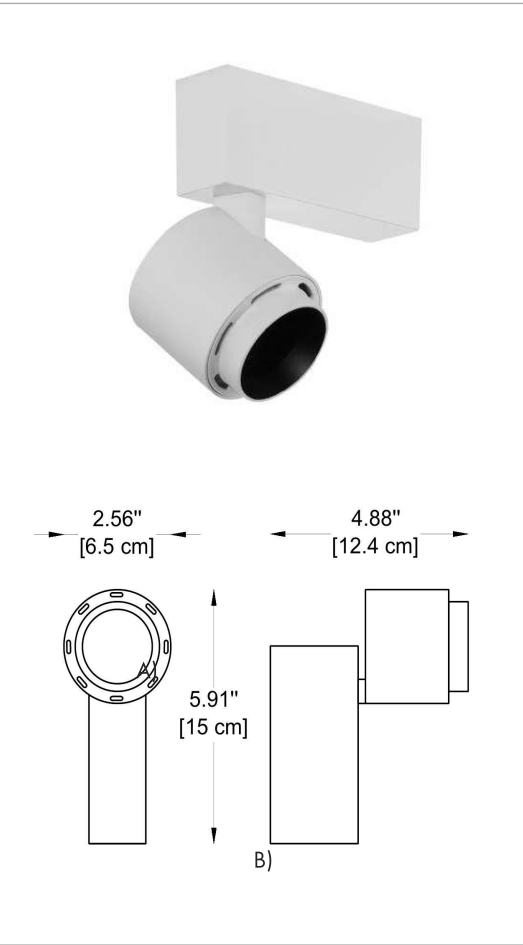

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-65-R-D9

Dimensions:

A) Diameter - 2.56" (6.5 cm)

B) Lenght - 5.91" (15 cm)

C) Height - 4.88" (12.4 cm)

Material:

Aliminum

Light Source:

LED / 8W / 276 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,1

Beam Angle:

-B20 - 20°

-B30 - 30°

-B40 - 40°

CCT:

-K27 - 2700K

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS - Custom on request*

Dimming Options:


-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LU - LUTRON

-CS - CASAMBI

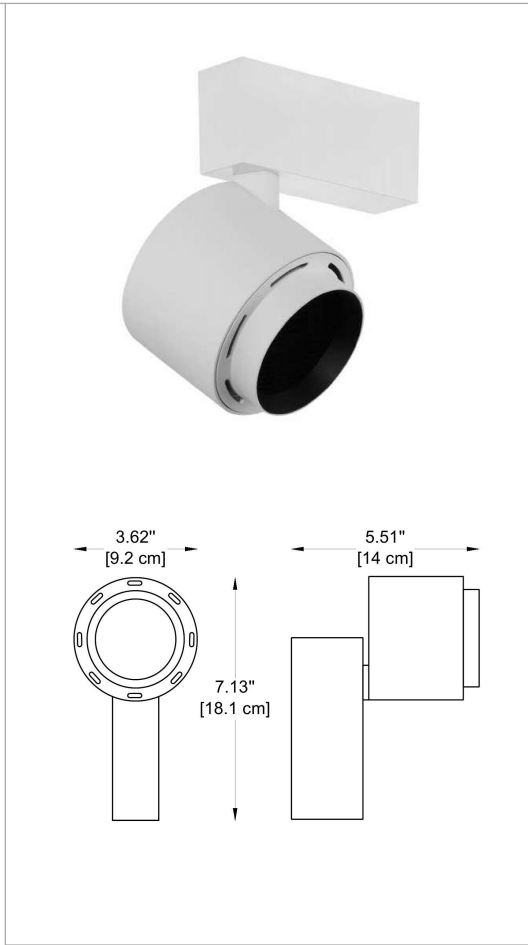

PROJECT

SPEC TYPE

NOTES

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -

-92-R-D9

Dimensions:

A) Diameter - 3.62" (9.2 cm)

B) Lenght - 7.13" (18.1 cm)

C) Height - 5.51" (14 cm)

Material:

Aliminum

Light Source:

LED / 15W / 625 lm / 24Vdc

Lighting type:

Direct

Lighting distribution:

Symmetric

Optical type:

Spot

Dimmable:

Yes

Driver:

Remote

Driver type:

Electronic

Emergency:

Without

Insulation class:

III

Weight (lb)

1,52

Beam Angle:

-B20 - 20°

-B30 - 30°

-B40 - 40°

CCT:

-K27 - 2700K

-K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI:

-C80 - 80

-C90 - 90

Finish Options:

-WL - White (RAL9003)

-BL - Black (RAL9005)

-CUS - Custom on request*

Dimming Options:

-DIM - 0-10V

-DL - DALI

-TR - TRIAC

-LU - LUTRON

-CS - CASAMBI

