




CUADRO

INSTALLATION TYPE:
(ACOUSTIC COLLECTION)

Installation Diagram

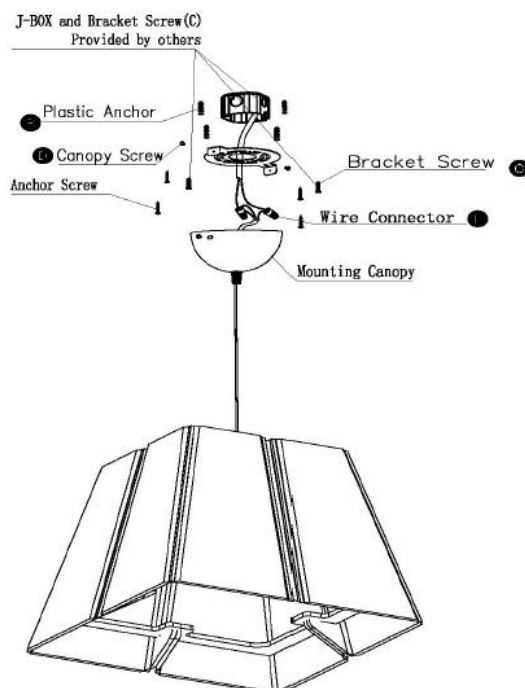


Step 1


Shut "OFF" the electricity at the main fuse box.

Place the wall switch in the "OFF" position of the room where you are installing the fixture.

Tools You May Need

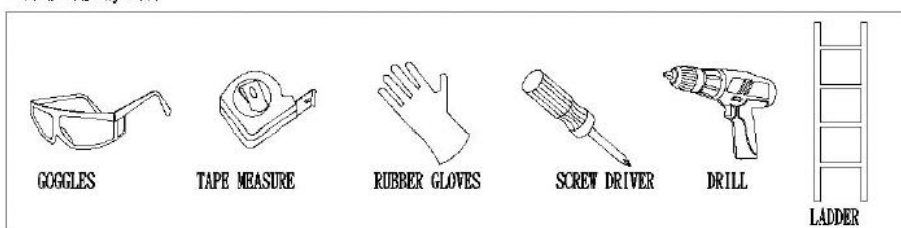

Circuit Box



sales@gordonbullard.com

www.byiba.com

1 877-964-4646




991 South Gull Lake Dr.

Richland, MI 49083

USA


Step2

Install the bulb into the acoustic profile.

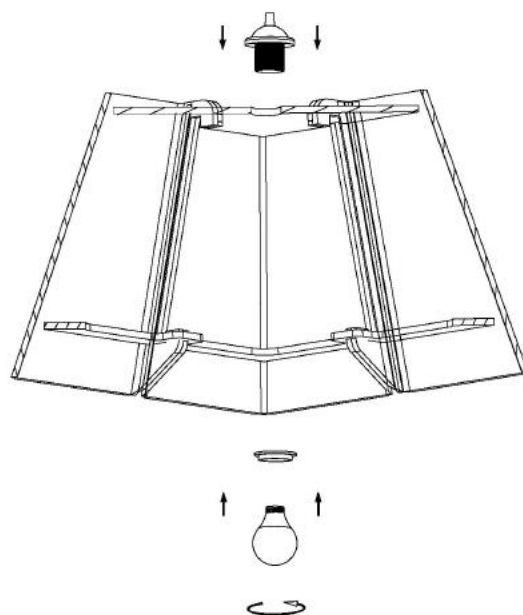

Step3

Use a screwdriver to loosen the screws between the mounting canopy and bracket from the side.

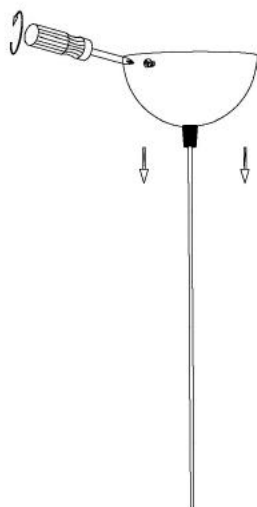

Step4

Take out a plastic pin, and drill 4pcs diameter 6mm holes on the ceiling according to the mounting bracket. Insert the expansion bolts into the holes. Use 2pcs M4*25mm screws to fix the mounting bracket with the junction box, refer to the picture shown below.

sales@gordonbullard.com

www.byiba.com


1 877-964-4646



991 South Gull Lake Dr.

Richland, MI 49083

USA

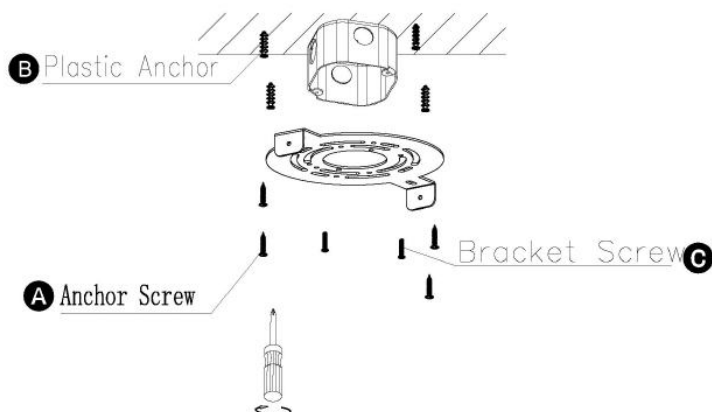


Attention: Must secure mounting plate at all connection points (junction box plus four outer points for small and medium size, or six outer points for large size) to support fixture weight appropriately. Not using all mounting points could damage the fixture and void the product warranty.

NOTE: Junction box used by Garvin 54171-S or equivalent / Provided by others


Step 5

Use wire connectors to connect L and N wires. After finishing, put all wires with connectors into the junction box. Use a screw to fix with mounting bracket and mounting canopy. Then loosen all the cables.

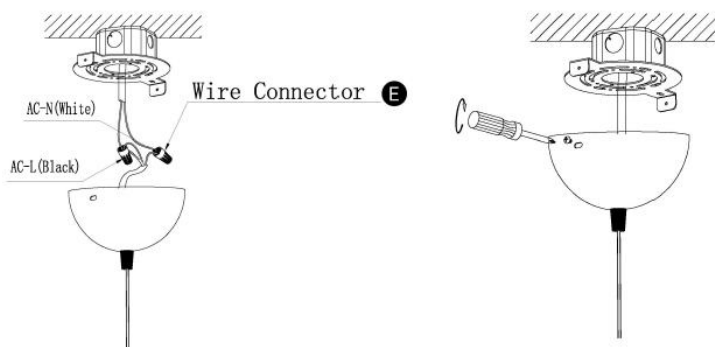

Step 6

Adjust the fixture cable length, Then loosen all the cables.



sales@gordonbullard.com

www.byiba.com

1 877-964-4646





991 South Gull Lake Dr.

Richland, MI 49083

USA

Step 7

After finishing the installation, please turn on the electricity at the main fuse box and the lighting works.

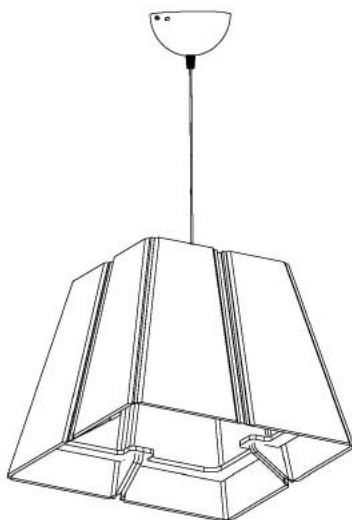

sales@gordonbullard.com

www.byiba.com

1 877-964-4646



991 South Gull Lake Dr.

Richland, MI 49083

USA



IMPORTANT

To ensure equipment safety you must carefully follow the instructions below. This leaflet must be kept handy by personnel entrusted with all ordinary and extraordinary maintenance.

- Before any installation or maintenance operation on the bulb, make sure it is disconnected from power
- Fit the correct bulbs, according to the type and power indicated on the lamp data label.
- Make sure the lamp technical features are compatible with the use you are going to make of it.
- Should you have any doubt, refer to the dealer or ask an electrician.
- When connecting to the mains, follow the correct colour code for power cables: (N) blue, (L) brown or black and, only for class I equipment, (T) yellow/green.
- When lamps are to be fitted to the wall directly through their ceramic parts, fasten the fixing screws lightly, to avoid breaking the ceramic.
- To clean the lamp on the outside, use a soft cloth, possibly wet. Do not use solvents or abrasive products. No liquid must get in contact with the lamp interior parts.
- Do not touch the equipment with dirty hands.



= Class I equipment, must be connected to an earth terminal.



= Double insulated lamp, does not need earthing.



= Electrical equipment in class III, electrical safety guaranteed by low voltage tension, does not require grounding



= Minimum distance to be observed from all lit up objects.



= Replace immediately the safety glass, if damaged, with the original part.



= The lamp uses low pressure bulbs, and needs no protection glass.



= The equipment at the end of its life must be collected separately from other waste.

sales@gordonbullard.com

www.byiba.com

1 877-964-4646



991 South Gull Lake Dr.

Richland, MI 49083

USA