



FLEX 360 R25 IP (360 LED NEON FLEXIBLE)

The FLEX 360 Collection is a premium round-profile LED neon flex delivering true 360° omnidirectional illumination. Engineered with advanced silicone extrusion technology, it provides seamless, dot-free light output with consistent brightness from every viewing angle. The flexible construction allows smooth bending and shaping, making it ideal for creative architectural outlines, feature lighting, and decorative installations where uniform circular light distribution is required. Designed for both indoor and outdoor applications, the FLEX 360 series features durable, UV-resistant silicone housing with high ingress protection ratings for long-term reliability. Available in multiple diameters and white light color temperatures, including 2300K, 2700K, 3000K, and 4000K. The system is supplied in fixed lengths with no field cutting allowed, ensuring consistent electrical performance, and is compatible with standard LED drivers.





MATERIAL:
High Purity Silica Gel

IK RATING:
IK08

VOLTAGE:
24V DC

IP RATING:
IP65

DRIVER POSITION:
Remote

WARRANTY:
5 years

MAIN FEATURES:
Full colour RGBW
Functional and minimalistic design
Skin-friendly surface treatment
Operating Temperature: -13°F to +131°F.

PROJECT

SPEC TYPE

NOTES

LED

IP65



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved


OUTDOOR

TECHNICAL

DECORATIVE

WWW.BYIBA.COM

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646
Updated 07/10/2026

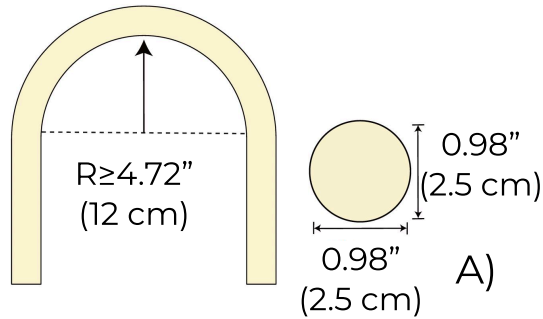

B)
196.85" (500 cm)

HOW TO ORDER:

Example:

CODE: BY-FLX360R25IP-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-FLX360R25IP-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-
000000-00013

1 MODELS:


A) Diameter - Ø: 0.98" (2.5 cm)
B) Length - L: 196.85" (500 cm)

2 LIGHT SOURCE:

CODE	INPUT VOLTAGE	CCT	RATED POWER	CRI	LUMENS	CUTTING
-LS1	24VDC	2300 K	13.7W (4.18W/ft)	90	560 (171/ft)	No cutting 28LED/1.31"
-LS2		2700 K			605 (184/ft)	
-LS3		3000 K			640 (195/ft)	
-LS4		4000 K			690 (210/ft)	


3 ENTRY CABLE:

-ECT



TOP

-ECS



SIDE

4 ACCESSORIES:



-AS-NNR25P1-25

R25 ceiling fixed installation
components



-AS-NNR25LCX-1000

Horizontal ceiling
Installation components



-AS-NNR25GH0-EC

R25 Hole Diameter 4.5mm top cap



PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE


Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026

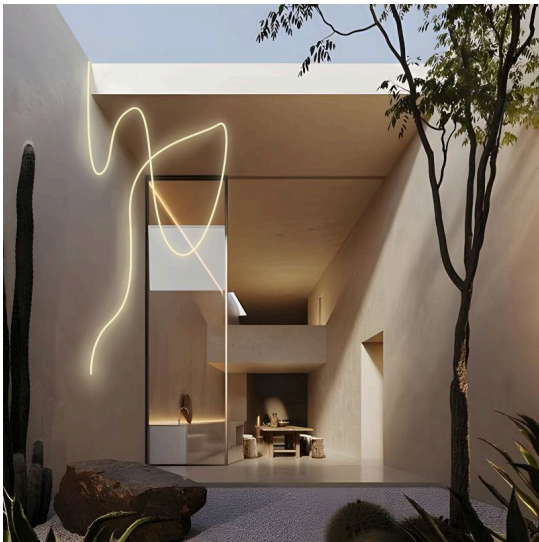

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:
Example:
CODE: BY-FLX360R25IP-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-FLX360R25IP-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-
000000-00013

4 ACCESSORIES:

- AS-FC-0009 (0.25m)
- AS-FC-0010 (0.5m)
- AS-FC-0011 (2m)

2P DC wire (Male)



- AS-FC-0012 (0.25m)
- AS-FC-0013 (0.5m)
- AS-FC-0014 (2m)

2P DC wire (Female)



- AS-FC-0027

2P T-Connection Wire



- AS-FC-0015 (0.25M)
- AS-FC-0016 (0.5M)
- AS-FC-0017 (2M)

4P DC wire (Male)



- AS-FC-0018 (0.25M)
- AS-FC-0019 (0.5M)
- AS-FC-0020 (2M)

4P DC wire (Female)



- AS-FC-0028

4P T-Connection Wire



- AS-FC-0021 (0.25m)
- AS-FC-0022 (0.5m)
- AS-FC-0023 (2m)

5P DC wire (Male)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026



PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-FLX360R25IP-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-FLX360R25IP-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-
000000-00013

4 ACCESSORIES:

- AS-FC-0024 (0.25m)
- AS-FC-0025 (0.5m)
- AS-FC-0026 (2m)

5P DC wire (Female)



-AS-FC-0030

5P T-Connection Wire



5 SYSTEM CONTROL:

-402-02-000000-00001

Monochrome Remote Control
R6-1
Operating voltage: 3VDC(Battery
CR2032)
Operating frequency: 2.4GHz
Remote control distance: 30m
Operating temperature:
-30°C-55°C
Size:L107*W58.5*H9(mm)



-402-0-000000-00013

Knob panel controller used for
dimming to warm
CPI-GBB
Input voltage: 12-24VDC
Input current: 6A*1CH
Operating temperature: -30°C-55°C
Size: L86*W86*H33(mm)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE


Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026

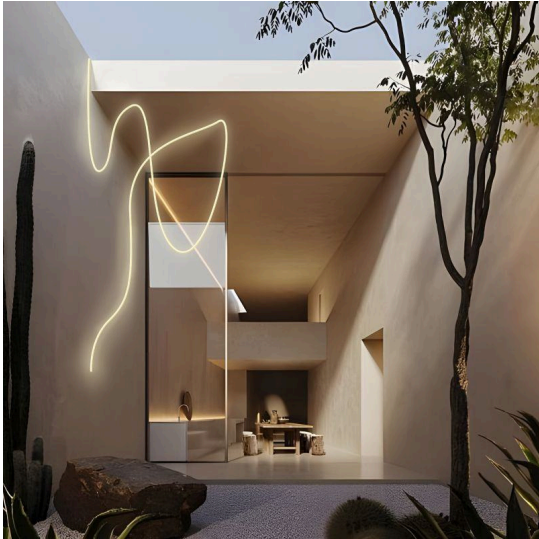

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-FLX360R25IP-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-FLX360R25IP-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-
000000-00013

5 SYSTEM CONTROL:

-23-01-00-0050

Programmable digital controller
K-8000C

Operating temperature: -20°C-85°C

Operating power supply: DC5V-24V input

Power consumption: 5W

Data transfer ports: 8 (8*1024 pixel)

Weight: 0.8 kg

Size: L180*W120*H30mm

Memory card: SD card

Storage capacity: 128MB-32GB

Card format: FAT/FAT32

Storage file: *.led



WE WELCOME ALL CUSTOM ORDERS


Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

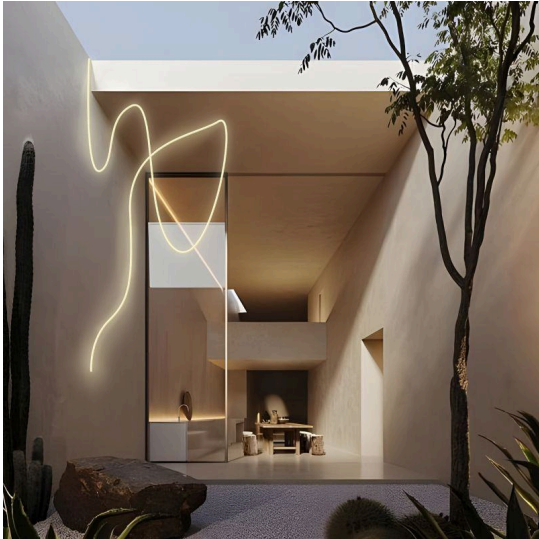

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-FLX360R25IP-CL-LS1-ECT-AS-
NNR25P1-25-402-02-000000-00013

BY-FLX360R25IP-CL-
LS1-ECT-AS-
NNR25P1-25-402-02-
000000-00013

5 SYSTEM CONTROL:

-402-02-000000-00013

Monochrome Control Receiver
CR1-GBA

Input voltage: 12-48VDC

Maximum load current: 15A*1CH, Max15A@12/24V
10A *1CH, Max10A@36/48V

Maximum load power: 15A*1CH, Max15A@12/24V
10A *1CH, Max10A@36/48V

Operating temperature: -30°C-55°C

Size: L175*W45*H27(mm)



-402-02-000000-00003

RGB/RGBW Remote Control
R8-1

Operating voltage: 3VDC (Battery
CR2032)

Operating frequency: 2.4GHz

Remote control distance: 30m

Operating temperature: -30°C-55°C

Product Size: L107*W58.5*H9(mm)



-402-01-000000-00003

RGB Control Receiver
CR3-GBA

Input voltage: 12-48VDC

Maximum load current: 6A*3CH,Max 18A

Maximum load power: 216W/432W@12V/24V
648W/864@36V/48V

Operating temperature: -30°C-55°C

Size: L175*W45*H27(mm)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026