



ABACO-S (track head)

The ABACO-S Non-Magnetic Track system features 1-Circuit and 3-Circuit track profiles, available in lengths of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). With an operating voltage of 110-277V, the profiles come in white or black finishes, made from aluminum with an electrostatic powder coating.


The system includes five spotlight designs, offering wattages of 13W, 21W, 24W, 28W, 35W, 47W, and 65W. The spotlights are crafted from aluminum die-casting or steel, both with electrostatic powder coating. Available CCT options include 3000K, 4000K, and 5000K, with CRI options of 80 or 90. Spotlights come in white, black, or gray finishes.



PROJECT

SPEC TYPE

NOTES

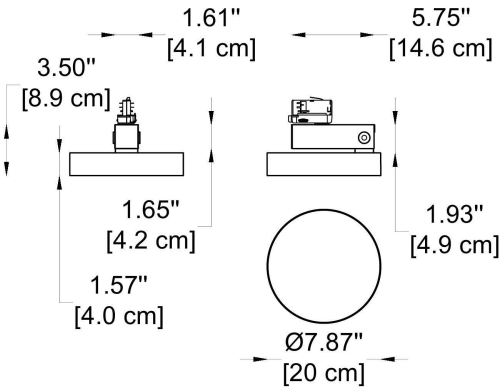

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-
TC-65130-13-0
3-K30-C90-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65130-13-03**
Dimensions: Ø: 7.87" (20 cm) x H: 3.5" (8.9 cm)
Housing: AL. Die-Casting, Electrostatic Powder Coating
Cover: PC
Light Source: LED (SMD)
Power & Currents: 24W / 600 mA
Lumens: 1971 lm


CCT: **-K30** - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65130-14-03**
Dimensions: Ø: 11.8" (30 cm) x H: 3.74" (9.5 cm)
Housing: AL. Die-Casting, Electrostatic Powder Coating
Cover: PC
Light Source: LED (SMD)
Power & Currents: 28W / 700 mA
Lumens: 2676 lm



CCT: **-K30** - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

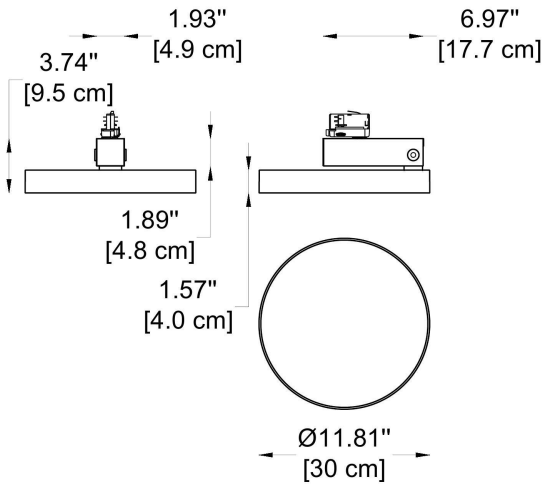

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.


OUTDOOR TECHNICAL DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

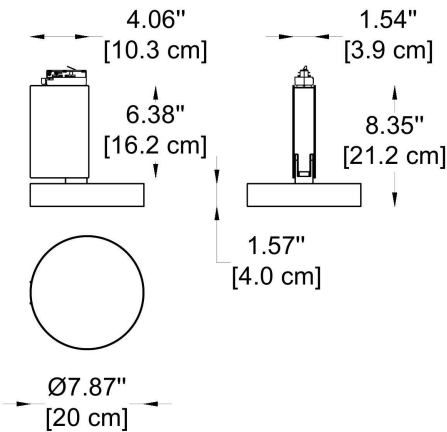

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65130-01
Dimensions:	Ø: 7.87" (20 cm) x H: 1.57" (4 cm)
Housing:	AL. Die-Casting, Electrostatic Powder Coating
Cover:	PC
Light Source:	LED (SMD)
Power & Currents:	28W / 700 mA
Lumens:	2281 lm


CCT:	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White
	-BL - Black
	-GR - Gray

Operating temperature range - -20 to +40°C
 Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL


DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
 1 877-964-4646
 Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65130-11
Dimensions:	Ø: 4.72" (12 cm) x H: 1.57" (4 cm)
Housing:	AL. Die-Casting, Electrostatic Powder Coating
Cover:	PC
Light Source:	LED (SMD)
Power & Currents:	13W / 350 mA
Lumens:	1104 lm

CCT:	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K


CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White
	-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026

PROJECT


SPEC TYPE

NOTES



Ø5.91" [15 cm]

1.57" [4 cm]



LED



IP20



HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65130-12
Dimensions: Ø: 5.91" (15 cm) x H: 1.57" (4 cm)
Housing: AL. Die-Casting, Electrostatic Powder Coating
Cover: PC
Light Source: LED (SMD)
Power & Currents: 21W / 500 mA
Lumens: 1604 lm


CCT: -K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: -C80 - 80
-C90 - 90

Finish Options: -WL - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com


www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65130-13
Dimensions:	Ø: 7.87" (20 cm) x H: 1.57" (4 cm)
Housing:	AL. Die-Casting, Electrostatic Powder Coating
Cover:	PC
Light Source:	LED (SMD)
Power & Currents:	24W / 600 mA
Lumens:	1971 lm


CCT:	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White
	-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL


DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646
Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

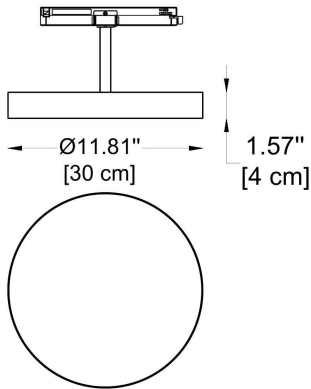

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65130-14

Dimensions: Ø: 11.81" (30 cm) x H: 1.57" (4 cm)

Housing: Steel, Electrostatic Powder Coating

Cover: PC

Light Source: LED (SMD)

Power & Currents: 28W / 700 mA

Lumens: 2676 lm

CCT: -K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: -C80 - 80

-C90 - 90


Finish Options: -WL - White

-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

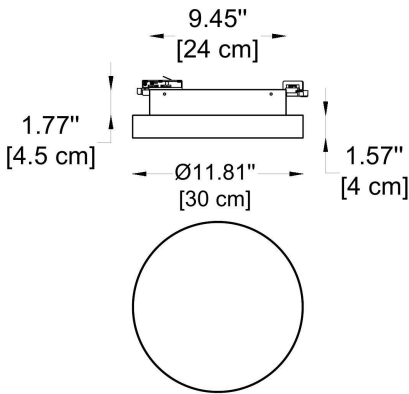

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65130-14-02
Dimensions:	Ø: 11.81" (30 cm) x H: 1.57" (4 cm)
Housing:	Steel, Electrostatic Powder Coating
Cover:	PC
Light Source:	LED (SMD)
Power & Currents:	28W / 700 mA
Lumens:	2676 lm


CCT:	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White
	-BL - Black

Operating temperature range - -20 to +40°C
 Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.


- OUTDOOR
- TECHNICAL
- DECORATIVE

Contact Us:
 sales@gordonbullard.com
 www.byiba.com
 1 877-964-4646
 Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

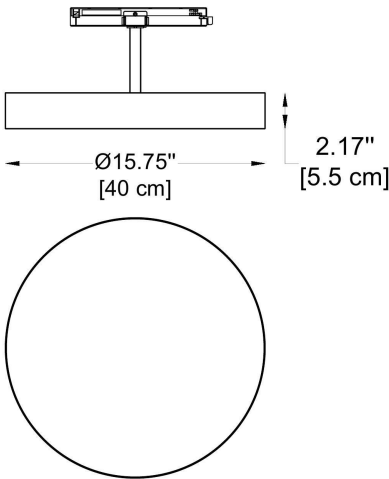

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65130-15

Dimensions: Ø: 15.75" (40 cm) x H: 1.57" (4 cm)

Housing: Steel, Electrostatic Powder Coating

Light Source: LED (SMD)

Power & Currents: 35W / 800 mA

Lumens: 3134 lm

CCT: -K30 - 3000K

-K40 - 4000K

-K50 - 5000K

CRI: -C80 - 80

-C90 - 90


Finish Options: -WL - White

-BL - Black

Operating temperature range - -20 to +40 °C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

- OUTDOOR
- TECHNICAL
- DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com


1 877-964-4646

Updated 08/12/2026

PROJECT

SPEC TYPE

NOTES

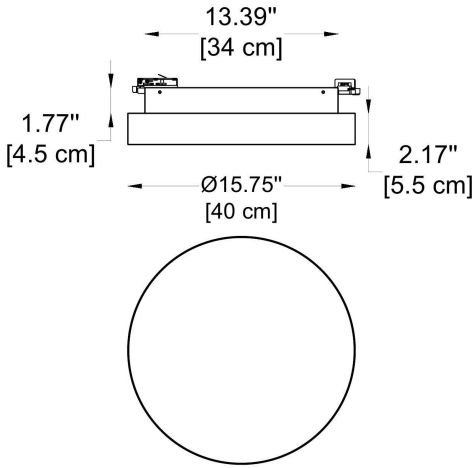

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-
TC-65130-13-0
3-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65130-15-02**
Dimensions: Ø: 15.75" (40 cm) x H: 2.17" (5.5 cm)
Housing: Steel, Electrostatic Powder Coating
Light Source: LED (SMD)
Power & Currents: 35W / 800 mA
Lumens: 3134 lm


CCT: **-K30** - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: **-C80** - 80
-C90 - 90

Finish Options: **-WL** - White
-BL - Black

Operating temperature range - -20 to +40 °C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR TECHNICAL DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65130-16-02
Dimensions: Ø: 19.69" (50 cm) x H: 2.17" (5.5 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Cover: PC
Light Source: LED (SMD)
Power & Currents: 47W / 980 mA
Lumens: 4300 lm




CCT: -K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: -C80 - 80
-C90 - 90

Finish Options: -WL - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

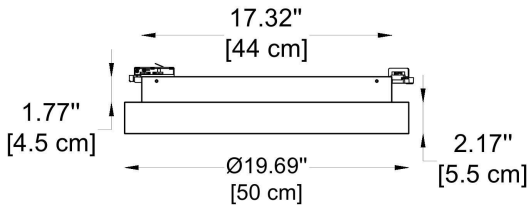

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.


OUTDOOR TECHNICAL DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

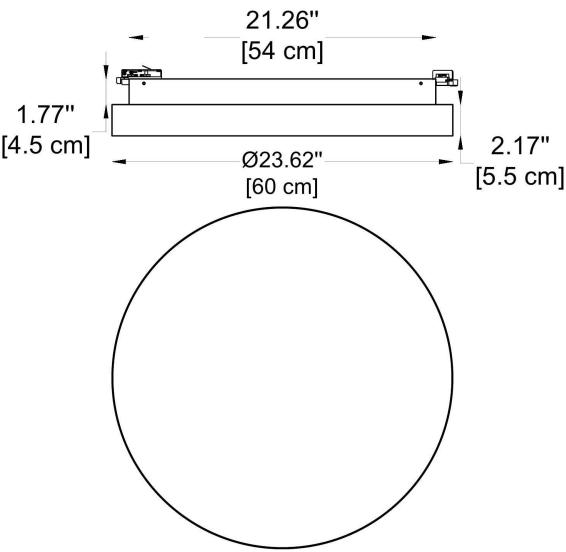

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - -65130-17-02
Dimensions: Ø: 23.62" (60 cm) x H: 2.17" (5.5 cm)
Housing: AL. Extrude, Electrostatic Powder Coating
Cover: PC
Light Source: LED (SMD)
Power & Currents: 65W / 1200 mA
Lumens: 5949 lm


CCT: -K30 - 3000K
-K40 - 4000K
-K50 - 5000K

CRI: -C80 - 80
-C90 - 90

Finish Options: -WL - White
-BL - Black

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.


OUTDOOR TECHNICAL DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

PROJECT

SPEC TYPE

NOTES

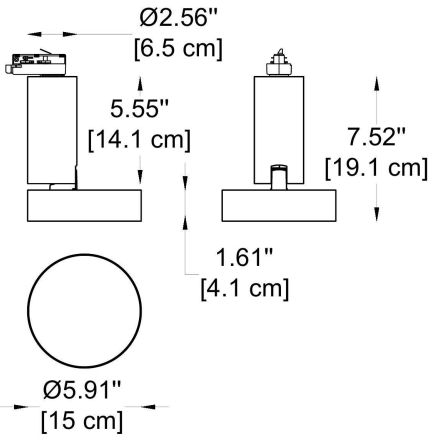

HOW TO ORDER:

Example:
CODE: BY-ABC-S-TC-65130-13-03-K30-C90-WL

CODE:

BY-ABC-S-TC-65130-13-03-K30-C90-WL

3 CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65200
Dimensions:	Ø: 23.62" (15 cm) x H: 1.61" (4.1 cm)
Housing:	AL. Die-Casting, Electrostatic Powder Coating
Gear Box:	AL. Die-Casting, Electrostatic Powder Coating
Cover:	PC
Light Source:	LED (SMD)
Power & Currents:	21W / 500 mA
Lumens:	1604 lm

CCT:	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K


CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White
	-BL - Black

Operating temperature range - -20 to +40°C

Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

- OUTDOOR
- TECHNICAL
- DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 08/12/2026