




The PICO (BY-PCO-RL) is a slim 24V DC track system designed for display shelves, cabinets, and compact spaces. Its plug-and-play modules can be easily installed and repositioned anywhere along the track.

Linear and spotlight modules can be combined to create flexible ambient or accent lighting. Multiple mounting profiles provide solutions for different surfaces and applications.



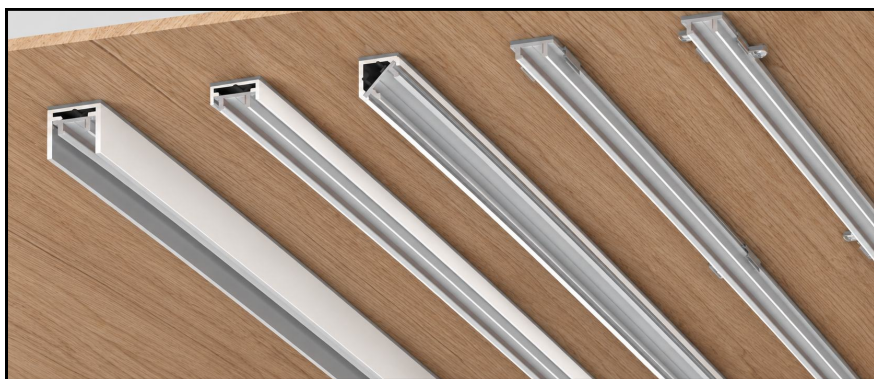

MATERIAL:

Aluminum

LIGHT SOURCE:

LED

VOLTAGE:

24V DC

TYPE:

Low-voltage mini track

DRIVER POSITION:

External


WARRANTY:

5 years

PROJECT

TRACK SIZE:

0.67" x 0.59" (1.7 cm x 1.5 cm)

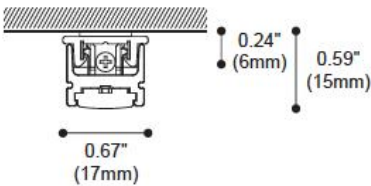

SPEC TYPE

CERTIFICATES:

ETL Listed(UL 2108 and CSA C22.2 No. 9.0)

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM



Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 09/22/2026

HOW TO ORDER:

Example:

CODE: BY-PCO-RL-100-BL-ASM-U-S-100-AAL-NS-0589-PC-L

1 TRACK:

LENGTH MODELS:

-100 Length - L: 39.37"(100 cm)
-200 Length - L: 78.74"(200 cm)
-300 Length - L: 118.11"(300 cm)


FINISH OPTIONS:

-BL Black
-GR Grey

2 INSTALLATION TYPE:

-ATM Adhesive Tape Mountin


-BR-0011 3M tape L: 39.37"(100 cm)



Recommended surfaces: Glass, marble and other smooth surfaces


-MC Mounting Clip Installation

-NS-0588 Fixed clip (standard)

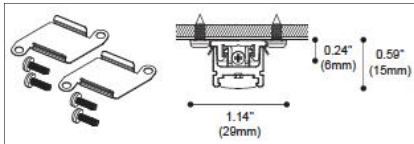

W: 1.14" (2.9 cm)
H: 0.59" (1.5 cm)
VP: 0.24" (0.6 cm)


-NS-0589 Fixed clip (optional))

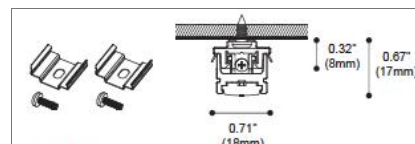

W: 0.71" (1.8 cm)
H: 0.67" (1.7 cm)
VP: 0.32" (0.8 cm)


-ASM Aluminum Profile Installation - Screw-Mounted Profile

-U-S Extrusion line

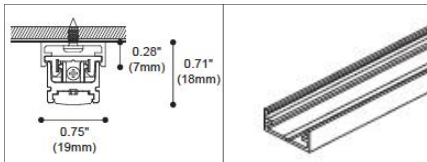


Width - W: 0.75" (1.9 cm)
Height - H: 0.71" (1.8 cm)

-U Extrusion line

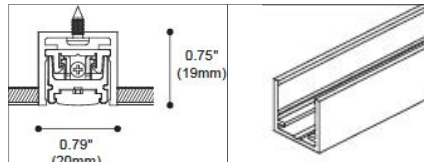

Width - W: 0.79" (2 cm)
Height - H: 0.75" (1.9 cm)


-L Extrusion corner

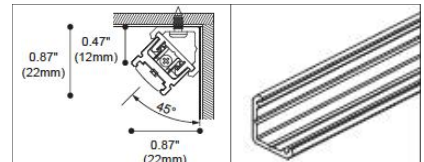

Width - W: 0.47" (1.2 cm)
Height - H: 0.87" (2.2 cm)


-AMP Aluminum Profile Installation - Magnetic Profile

-U-S-M Extrusion line

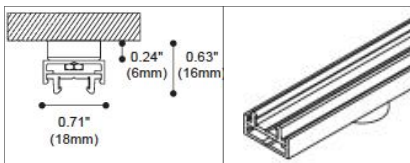


Width - W: 0.71" (1.8 cm)
Height - H: 0.63" (1.6 cm)

-U-M-V Extrusion line

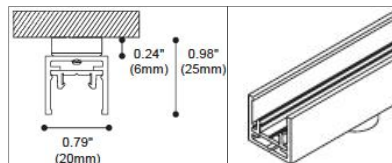

Width - W: 0.79" (2 cm)
Height - H: 0.98" (2.5 cm)

-U-M-H Extrusion line

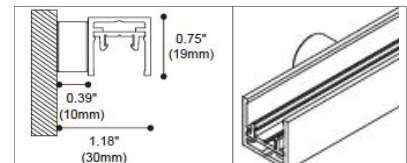

Width - W: 1.18" (3 cm)
Height - H: 0.75" (1.9 cm)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 09/22/2026

HOW TO ORDER:

Example:

CODE: BY-PCO-RL-100-BL-ASM-U-S-100-AAL-NS-0589-PC-L

2


INSTALLATION TYPE:

LENGTH MODELS:		FINISH OPTIONS:	
-100	Length - L: 39.37"(100 cm)	-BL	Black
-200	Length - L: 78.74"(200 cm)	-AAL	Anodized Alum.
-300	Length - L: 118.11"(300 cm)		

3

ACCESSORIES:

- PC0190 End cap
- NS-0590 Connection clip
- BR-0011 3M Adhesive Tape
- NS-0588 Standard Fixed Clip
- NS-0589 Optional Fixed Clip



- CP-MOL-27-200
- Power cord
- Power cord MOLEX male plug
- Length: 78.74"(200cm)



- CP-27-200
- Power cord
- Length: 78.74"(200cm)



- CS-27-15
- Connection cord Length:5.91"(15cm)
- CS-27-30
- Connection cord Length:11.81"(30cm)
- CS-27-60
- Connection cord Length:23.62"(60cm)



- CSC-27
- Circuit connector



- CSP-27-60
- (Sidefeed)
- I/P: 24VDC, O/P: 24VDC
- Connection cord with top female plug
- Length:23.62"(60cm)



- CSP-A-27-60
- (Endfeed)
- I/P: 24VDC, O/P: 24VDC
- Connection cord with top female plug
- Length:23.62"(60cm)



50W Max. Connection

50W Max. Connection



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

HOW TO ORDER:

Example:

CODE: BY-PCO-RL-100-BL-ASM-U-S-100-AAL-NS-0589-PC-L

4

TRACK HEADS:



*For detailed information see our specsheets for each head



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.