




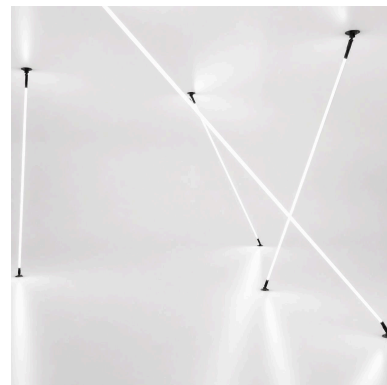

FLEX SKYLINE 360 R13 (360 LED NEON FLEXIBLE)

The FLEX Skyline 360 it has a flexible round-profile LED neon system delivering uniform 360° omnidirectional illumination for architectural and decorative lighting. Engineered with high-transmittance silicone to provide smooth, dot-free light output with consistent brightness from every viewing angle. The integrated internal support structure allows stable suspended runs and creative three-dimensional lighting forms. Designed for indoor and semi-outdoor applications, the system features durable silicone housing with IP65 protection and is available in white color temperatures including 2300K, 2700K, 3000K, and 4000K.

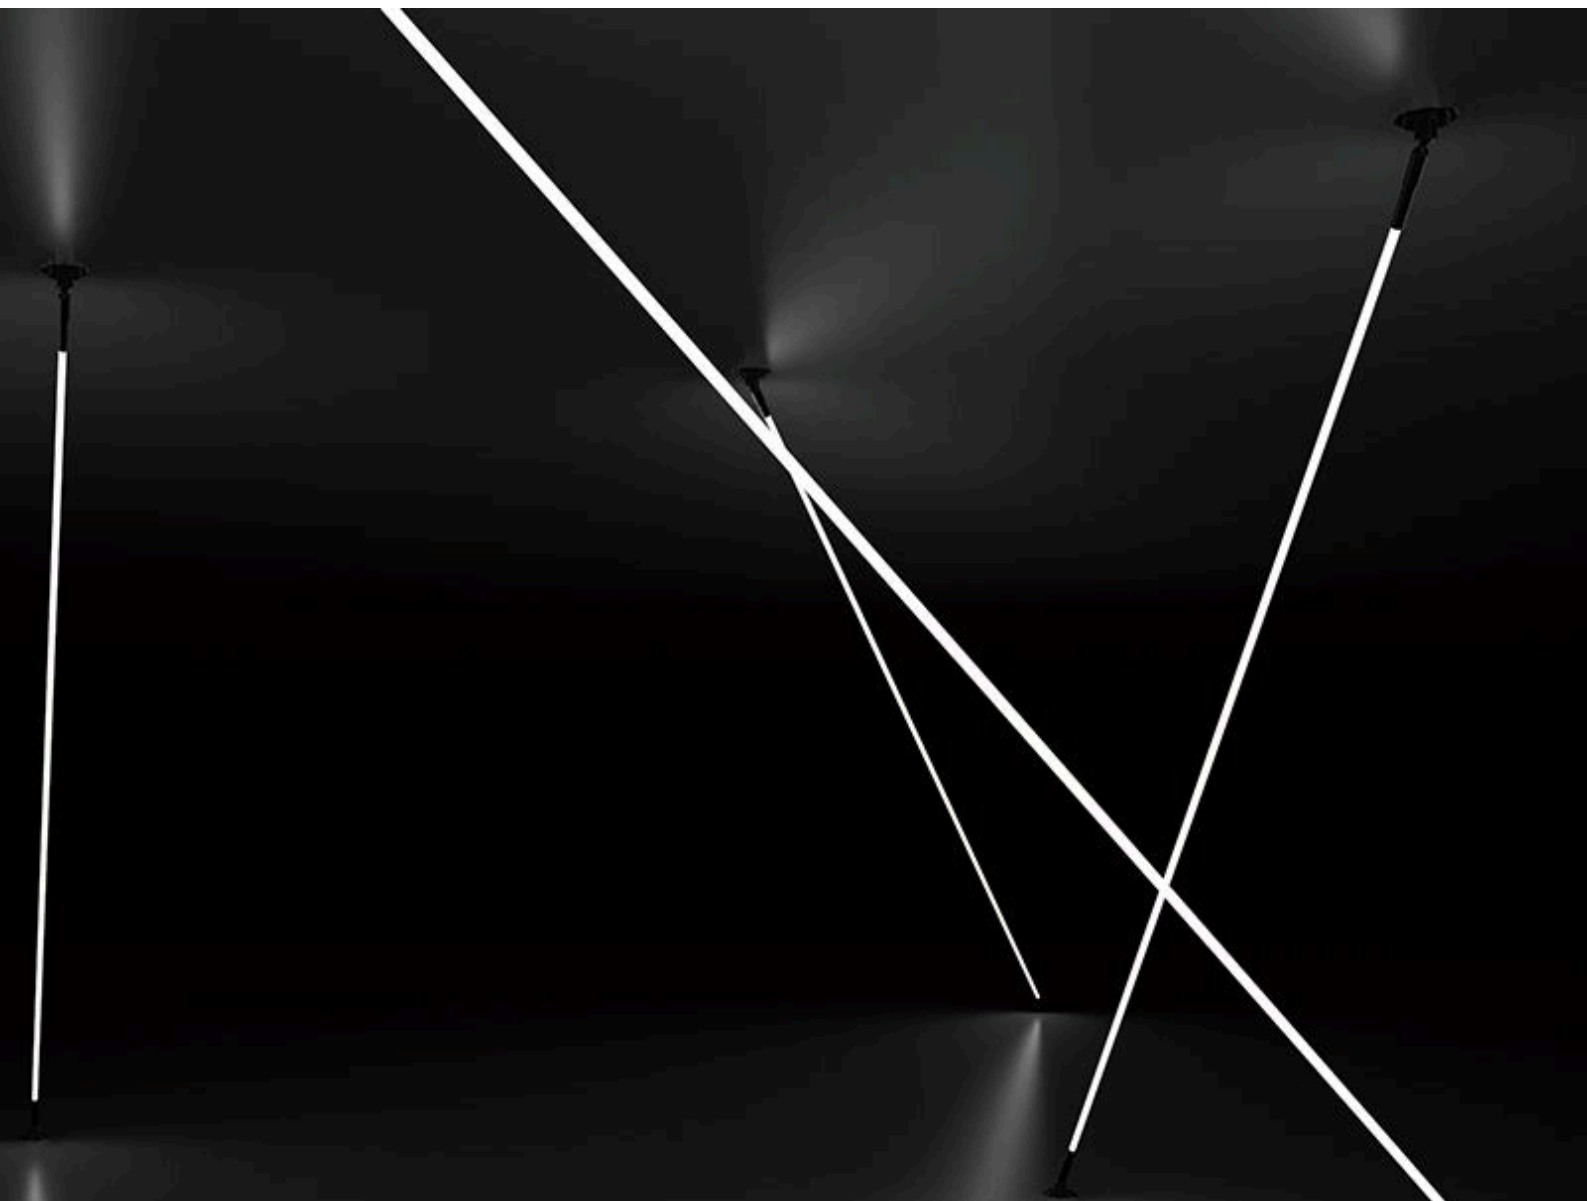

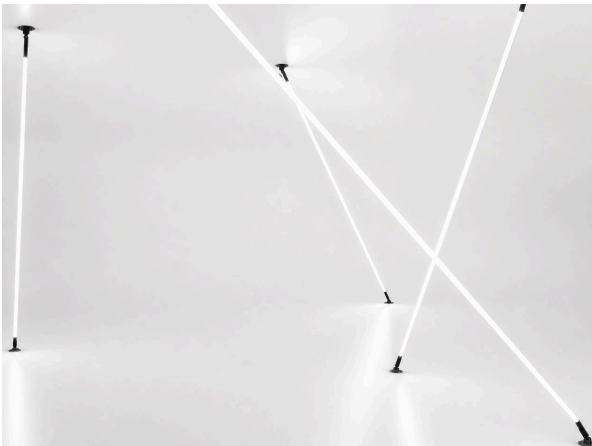

MATERIAL:
High Purity Silica Gel

IK RATING:
IK08

VOLTAGE:
48V DC / 24V DC

IP RATING:
IP65

DRIVER POSITION:
Remote

WARRANTY:
5 years

PROJECT

MAIN FEATURES:
Full colour RGBW
Functional and minimalistic design
Skin-friendly surface treatment
Operating Temperature: -13°F to +131°F.

SPEC TYPE

NOTES

LED

IP65



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:
sales@gordonbullard.com
www.byiba.com
1 877-964-4646

HOW TO ORDER:

Example:

CODE: BY-FLXS360R13-CL-LS1-AS-

NNR13SA-182-402-02-000000-000001-402-02-000000-00

013

BY-FLXS360R13-CL-LS1-AS-

NNR13SA-182-402-02-000

000-00001-402-02-00000

0-00013

1

MODELS:

A) Diameter - $\varnothing$: 0.52" (1.3 cm)

B) Length - L: Varies

2


LIGHT SOURCE:

CODE	INPUT VOLTAGE	CCT	RATED POWER	CRI	LENGTH	LUMENS	CUTTING
-LS1	24VDC	2300 K	13W (3.96W/ft)	90	16.4ft	585 (178/ft)	No cutting 14LED/0.98"
-LS2		2700 K				675 (206/ft)	
-LS3		3000 K				700 (213/ft)	
-LS4		4300 K				700 (213/ft)	
-LSS1	48VDC	2300 K	13W (3.96W/ft)	90	32.8ft	585 (178/ft)	No cutting 28LED/1.97"
-LSS2		2700 K				675 (206/ft)	
-LSS3		3000 K				700 (213/ft)	
-LSS4		4300 K				700 (213/ft)	

3


ENTRY CABLE:

-ECT



TOP

-ECS



SIDE

4

ACCESSORIES:

-AS-NNR13SA-182

Double end suspension kit (white)


$\varnothing$ 90mm*L182mm with screws



-AS-NNR13SA3-182

Double end suspension kit (black)


$\varnothing$ 90mm*L182mm with screws



-AS-NNR13DCX-XX

Silicone plug and tail plug

$\varnothing$ 13mm*L13.5mm

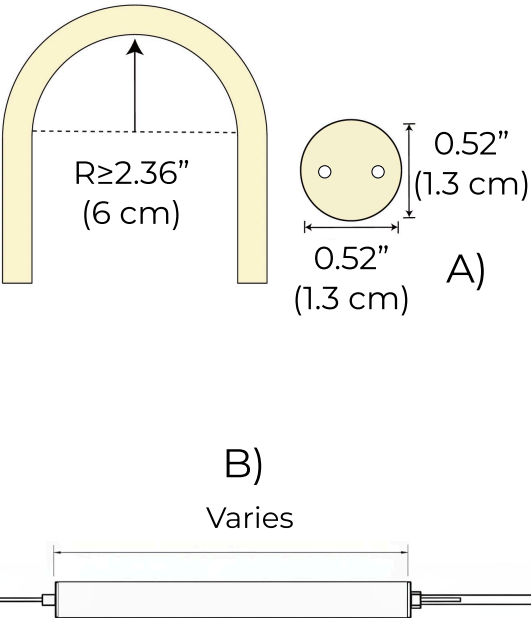

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS


Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

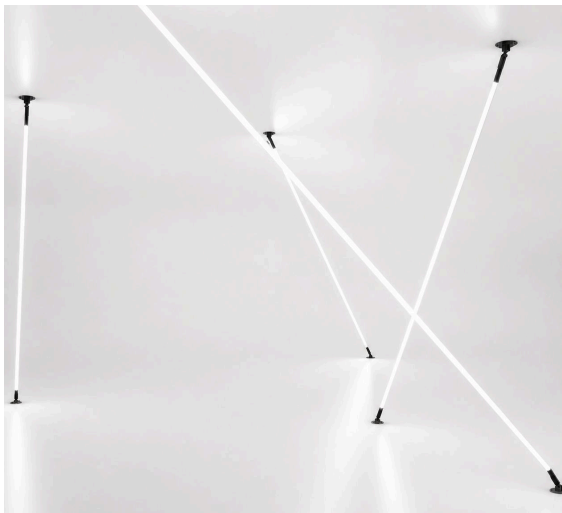

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-FLXS360R13-CL-LS1-AS-

NNR13SA-182-402-02-000000-00001-402-02-000000-0013

BY-FLXS360R13-CL-LS1-AS-
NNR13SA-182-402-02-000
000-00001-402-02-00000
0-00013

5

SYSTEM CONTROL:

-402-0-000000-00013

Knob panel controller used for
dimming to warm
CPI-GBB

Input voltage: 12-24VDC

Input current: 6A*1CH

Operating temperature: -30°C-55°C

Size: L86*W86*H33(mm)



-402-02-000000-00013

Monochrome Control Receiver
CRI-GBA

Input voltage: 12-48VDC

Maximum load current: 15A*1CH, Max15A@12/24V
10A *1CH, Max10A@36/48V

Maximum load power: 15A*1CH, Max15A@12/24V
10A *1CH, Max10A@36/48V

Operating temperature: -30°C-55°C

Size: L175*W45*H27(mm)



-402-02-000000-00001

Monochrome Remote Control
R6-1

Operating voltage: 3VDC(Battery CR2032)

Operating frequency: 2.4GHz

Remote control distance: 30m

Operating temperature: -30°C-55°C

Size:L107*W58.5*H9(mm)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/10/2026