



KAISA COLLECTION (PENDANT LIGHTING)

The KAISA pendant features a wide, softly curved shade that creates a clean and balanced silhouette. Its downward-directed illumination provides comfortable task lighting for dining tables, kitchen islands, and work areas. The minimalist design fits naturally into contemporary residential, hospitality, and commercial interiors. Available in multiple sizes and finishes, KAISA can be installed individually or arranged in decorative groups.



	LIGHTING: LED VOLTAGE: 110-277V CONSTRUCTION MATERIAL: Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation, Die-cast aluminum EN AB 44100 highly resistant to oxidation, Polycarbonate FINISH AND PROTECTION: Primary treatment with nanoceramic conversion. Protection with textured polyester powder coating resistant to weathering and UV rays CUTOUT SHAPE: Round APPLIANCE CLASS: III IP RATING: IP20/IP44 IK RATING: IK06 VISUAL&ENVIRONMENTAL COMFORT: UGR < 19 DRIVER POSITION: Integral CONTROL: Dim based on driver
PROJECT	
SPEC TYPE	
NOTES	

LED

110-277V

III

IP20

IP44



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/23/2026



CORD LENGTH:

19.69" (0.5m)

BEAM DIRECTIONABILITY:

Fixed optics

DIFFUSER MATERIAL/FINISH:

Anti-glare ring and protective glass/Ellipsoidal

OPTICS:

Reflector in anti-UV technopolymer with super pure aluminum metallization

SECONDARY OPTICS:

Black anti UV technopolymer reflector

MAIN FEATURES:

-20 °C ÷ +35 °C Increased temperature to 50°C upon request previous specific components and test

PROJECT

SPEC TYPE

NOTES

LED

IP20

IP44



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE



Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/23/2026

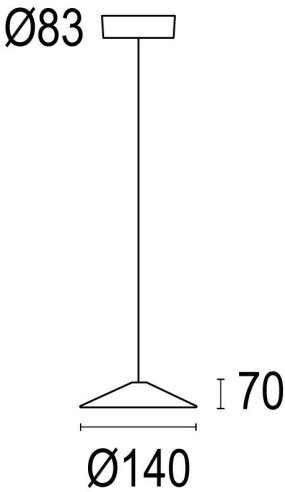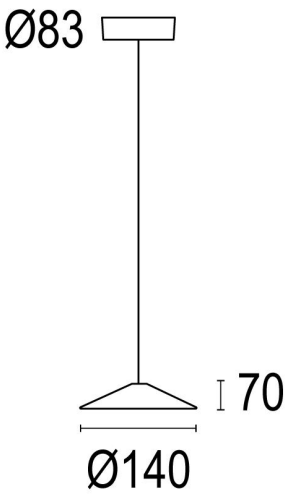

HOW TO ORDER:

Example:

CODE: BY-000060.BGSX-GH-S-L1-B1-DIM-01

BY-000060.BGSX
-GH-S-L1-B1-
DIM-01

1 MODELS:

-S

DIMENSIONS:

Diameter - Ø: 5.51" (14 cm)
Height - H: 2.76" (7 cm)

LIGHT SOURCE:

- L1

LED/1x3W/2700K/370lm/110-277V - 50-60 Hz
- L2

LED/1x3W/3000K/388lm/110-277V - 50-60 Hz
- L3

LED/1x4.8W/2700K/584lm/110-277V - 50-60 Hz
- L4

LED/1x4.8W/3000K/584lm/110-277V - 50-60 Hz

BEAM ANGLE: LIGHT DISTRIBUTION:

- B1

15°

Symmetrical medium flood (15 ° - 45 °)
- B2

40°

Symmetrical medium flood (15 ° - 45 °)
- B3

50°

Symmetrical wide beam (45 ° - 125 °)

-SR

DIMENSIONS:

Diameter - Ø: 5.51" (14 cm)
Height - H: 2.76" (7 cm)

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	
-B1-3W	50°	1 x 3W	2700 K	1 x 370 lm	500 mA
-B2-3W	15°	1 x 3W	3000 K	1 x 388 lm	500 mA
-B3-3W	50°	1 x 3W	3000 K	1 x 388 lm	500 mA
-B1-3.2W	15°	1 x 3.2W	2700 K	1 x 365 lm	24V DC
-B2-3.2W	50°	1 x 3.2W	2700 K	1 x 365 lm	24V DC
-B3-3.2W	15°	1 x 3.2W	3000 K	1 x 378 lm	24V DC
-B4-3.2W	50°	1 x 3.2W	3000 K	1 x 378 lm	24V DC
-B1-4.8W	15°	1 x 4.8W	2700 K	1 x 584 lm	900 mA
-B2-4.8W	50°	1 x 4.8W	2700 K	1 x 584 lm	900 mA
-B3-4.8W	15°	1 x 4.8W	3000 K	1 x 584 lm	900 mA
-B4-4.8W	50°	1 x 4.8W	3000 K	1 x 584 lm	900 mA





WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com
www.byiba.com
1 877-964-4646

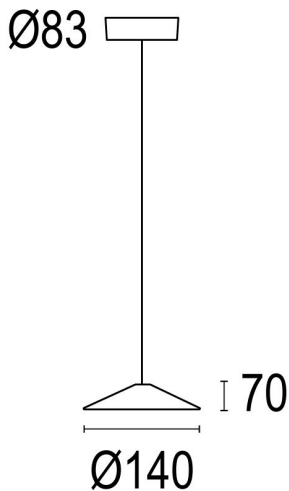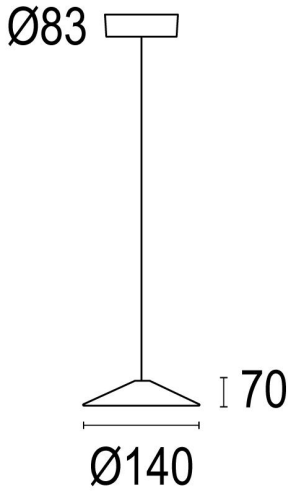

HOW TO ORDER:

Example:

CODE: BY-000060.BGSX-GH-S-L1-B1-DIM-01

BY-000060.BGSX
-GH-S-L1-B1-
DIM-01

1 MODELS:

-SL

DIMENSIONS:

Diameter - Ø: 5.51" (14 cm)
Height - H: 2.76" (7 cm)

LIGHT SOURCE:

- L1 LED/3x3W/2700K/370lm/110-277V - 50-60 Hz
- L2 LED/3x3W/3000K/388lm/110-277V - 50-60 Hz
- L3 LED/3x4.8W/2700K/584lm/110-277V - 50-60 Hz
- L4 LED/3x4.8W/3000K/584lm/110-277V - 50-60 Hz

BEAM ANGLE: LIGHT DISTRIBUTION:

- B1 15° Symmetrical medium flood (15° - 45°)
- B2 40° Symmetrical medium flood (15° - 45°)
- B3 50° Symmetrical wide beam (45° - 125°)

-SM

DIMENSIONS:

Diameter - Ø: 5.51" (14 cm)
Height - H: 2.76" (7 cm)

LIGHT SOURCE:

- L1 LED/3x3W/2700K/370lm/110-277V - 50-60 Hz
- L2 LED/3x3W/3000K/388lm/110-277V - 50-60 Hz
- L3 LED/3x5.7W/2700K/619/110-277V - 50-60 Hz
- L4 LED/3x4.8W/3000K/650/110-277V - 50-60 Hz

BEAM ANGLE: LIGHT DISTRIBUTION:

- B1 15° Symmetrical medium flood (15° - 45°)
- B3 50° Symmetrical wide beam (45° - 125°)



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.



Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

-S

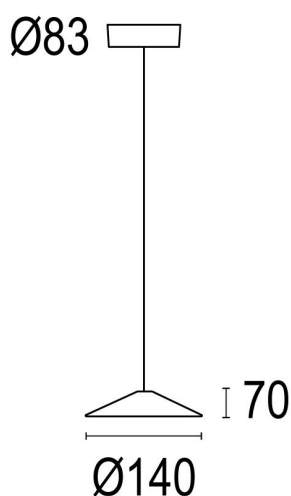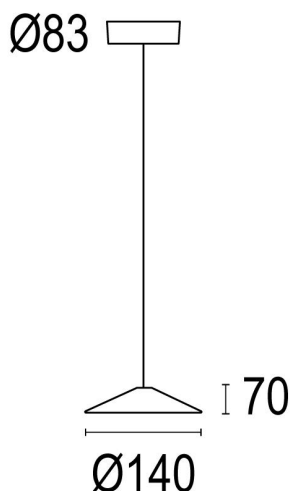

HOW TO ORDER:

Example:

CODE: BY-000060.BGSX-GH-S-L1-B1-DIM-01

BY-000060.BGSX
-GH-S-L1-B1-
DIM-01

2

DIMMING OPTIONS:

- DIM 0-10V
- DALI DALI
- NON Non-Dimmable

3

FINISH OPTIONS:

STANDARD FINISHES

- 01 White matt
- 02 Black matt

CUSTOM REQUEST FINISHES

- 05 Anthracite grey(matt)
- 26 Bronze
- 19 Light grey(matt)
- 45 Corten matt
- 56 Gold
- 62 Antique grey matt
- 65 Blue matt
- 80 Sand matt
- 83 Green matt



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 07/23/2026