



SMOOTH (track head)

The SMOOTH Non-Magnetic Track system comes in both 1-Circuit and 3-Circuit track profiles, with lengths of 39.4" (100 cm), 78.7" (200 cm), and 118" (300 cm). Operating at 110-277V, the track is made from aluminum with an electrostatic powder coating, available in white or black finishes.

Included are two spotlight models, each measuring Ø 5.35" (13.6 cm) x H 5.3" (13.5 cm), with wattage options of 20W or 28W for the reflector version, and 19W for the lens version. Spotlights feature an anodized specular silver reflector or a lens. CCT options are 3000K, 4000K, or 5000K, with CRI options of 80 or 90, available in white, black, or gray finishes.

The gear box is crafted from die-cast aluminum with electro powder coating, and the reflector is anodized specular silver aluminum. The fixture has dimensions of Ø 13.8" (35 cm) x H 14.3" (36.3 cm), with an additional section measuring.

Available in black and grey finishes, it uses LED technology, operating at 110-277V with wattage options of 19W or 27W, and color temperatures of 3000K or 4000K, with CRI options of 80 or 90. ETL certified, this fixture is ideal for indoor applications.




PROJECT

SPEC TYPE

NOTES



REFLECTOR

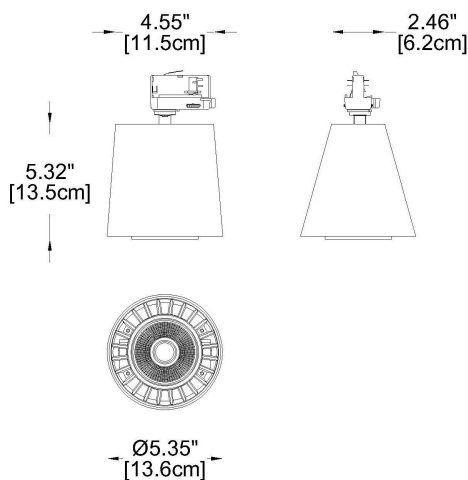

HOW TO ORDER:

Example:
CODE: BY-SMO-TC-65290-01-W0-K30-C80-B1-WL

CODE:

BY-SMO-TC-65290-01-W2-K30-C80-B1-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE - **-65290-01**

Dimensions: Ø: 5.35" (13.6 cm) x H: 5.3" (13.5 cm)
Housing: AL. Die-Casting, Electrostatic Powder Coating
Reflector: AL. Anodized Specular Silver
Gear Box: AL. Die-Casting, Electrostatic Powder Coating
Light Source: LED (COB)
Power & Currents: **-W2** - 20W / 500 mA
-W3 - 28W / 700 mA

CCT: **-K30** - 3000K
-K40 - 4000K

CRI: **-C80** - 80
-C90 - 90

Beam Angle & lumens: For 20W model:
-B1 - 17.7° = 2277 lm
-B2 - 25.5° = 2244 lm
-B3 - 38.9° = 2284 lm

For 28W model:
-B1 - 17.8° = 3044 lm
-B2 - 26° = 3000 lm
-B3 - 39.2° = 3056 lm

Finish Options: **-WL** - White
-BL - Black
-GR - Gray

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646


PROJECT

SPEC TYPE

NOTES



LENS

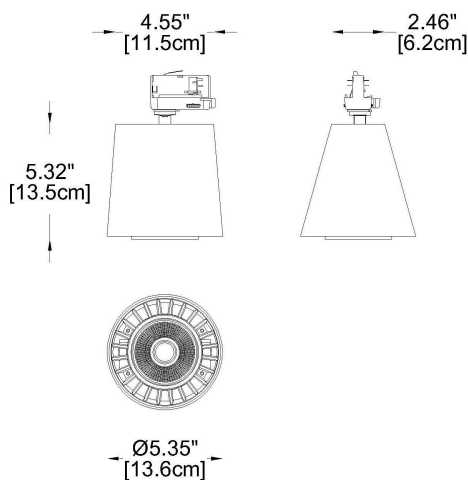

HOW TO ORDER:

Example:
CODE: BY-SMO-TC-65290-01-W0-K30-C80-B1-WL

CODE:

BY-SMO-TC-65290-01-W2-K30-C80-B1-WL

3

CHOOSE TRACK HEAD:

GENERAL INFORMATION

CODE -	-65290-02
Dimensions:	Ø: 5.35" (13.6 cm) x H: 5.3" (13.5 cm)
Housing:	AL. Die-Casting, Electrostatic Powder Coating
Reflector:	Lens
Gear Box:	AL. Die-Casting, Electrostatic Powder Coating
Light Source:	LED (SMD)
Power :	19W
Output Current:	500 mA
Luminous Flux:	1469 lm


CCT:	-K30 - 3000K
	-K40 - 4000K
	-K50 - 5000K

CRI:	-C80 - 80
	-C90 - 90

Finish Options:	-WL - White
	-BL - Black
	-GR - Gray

Operating temperature range - -20 to +40°C
Maintenance of lumen - L80 - 50 000 hours at 25 °C

PHOTOMETRICS:

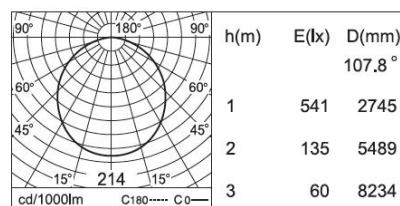

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

PROJECT

SPEC TYPE

NOTES



REFLECTOR



LENS



HOW TO ORDER:

Example:
CODE: BY-SMO-TC-65290-01-W0-K30-C80-B1-WL


CODE:

BY-SMO-TC-65290-01-W2-K30-C80-B1-WL


PHOTOMETRICS:

FOR REFLECTOR TYPE:


20W MODEL

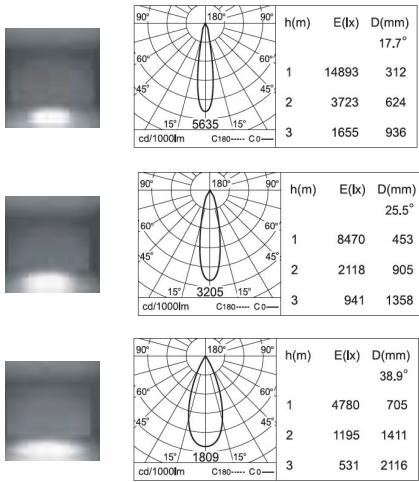

28W MODEL

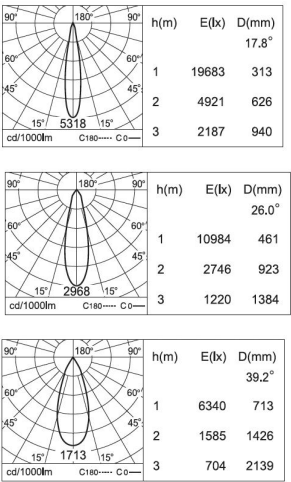

FOR LENS TYPE:

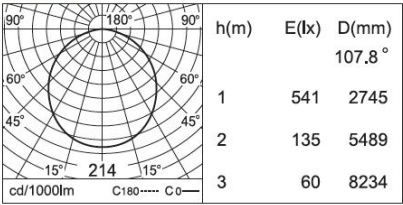

WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646