



SURF (ACOUSTIC LIGHT)

The SURF Acoustic Light combines efficient linear illumination with sound-absorbing performance in a refined suspended design. Its acoustic panel helps reduce unwanted noise and improves comfort in open-plan interiors, offices, hospitality spaces, and collaborative environments. The integrated LED provides smooth, uniform downward illumination for comfortable general and task lighting. A slim profile and warm material finish allow the fixture to complement both modern and natural interior concepts. Available in multiple sizes and configurations, SURF offers a flexible solution for projects requiring balanced acoustics, visual comfort, and architectural style.





MATERIAL:

0.9cm thick Sola Felt is a PET material, manufactured with 50% post-consumer recycled content

LIGHTING:

LED

VOLTAGE:

110-277V

SDCM:

3

DIFFUSION:

Frosted optical diffuser

DRIVER POSITION:

Integral

WARRANTY:

5 year warranty on all standard components

MAIN FEATURES:

Sola Felt is a LBC Red List Free labeled product, eligible for LEED, Living Building Challenge, and other green building certification credits.

CERTIFICATES:

CSA listed conforming to UL Standard 1598 in the U.S. and CAN/CSA C22.2 No. 250.0 in Canada
Damp Location Rated
RoHS compliant

ABSORPTION:

NRC per Fixture: 1.30 Average of values taken at 250, 500, 1000, and 2000 Hz

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS



Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

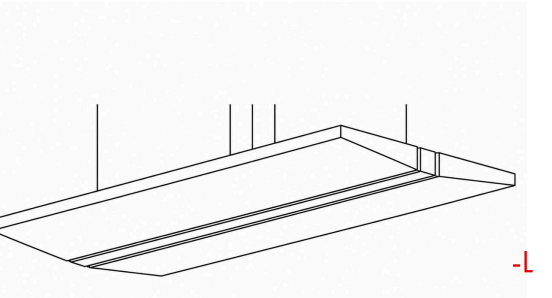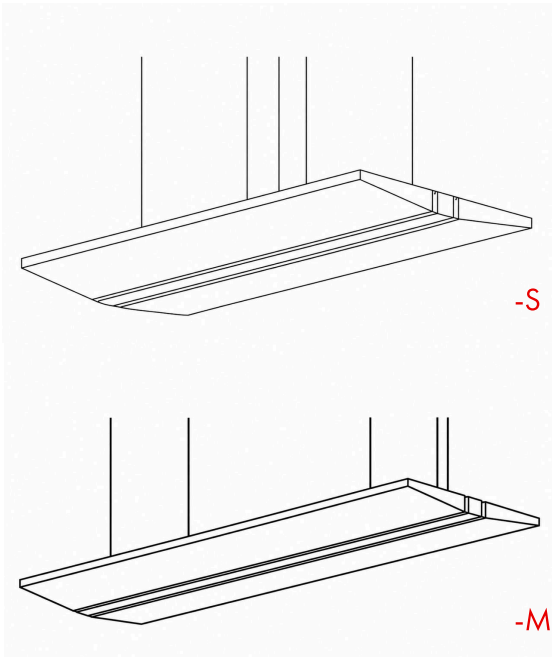

HOW TO ORDER:

Example:

CODE: BY-SRF-SP-SM-S-L1-C90-K27-ST-DIM-DALI-WH-WH-FLT-EB

1


MOUNTING:

-SM SURFACE MOUNTED
-RD RECESSED

Adjustable stainless steel aircraft cable, contact studio for lengths over 20"

For recessed canopy, cut 11" dia hole and recess j-box or mounting structure by 1.5"

Canopy Diameter - Ø: 10"



2

MODELS:

-S

DIMENSIONS:

Height - H: 2.25" (5.72 cm)
Width - W: 24" (60.96 cm)
Length - L: 48" (121.92 cm)

LIGHT DISTRIBUTION:

	TOTAL FIXTURE WATTAGE (W)	NOMINAL LUMEN OUTPUT
-L1	9.80W	200
-L2	17.60W	350
-L3	21.60W	450
-L4	25.50W	550
-L5	29.20W	650
-L6	33.50W	750
-L7	37.50W	825
-L8	41.00W	925

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE



Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 09/09/2026

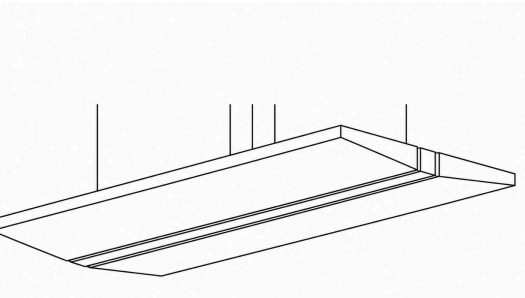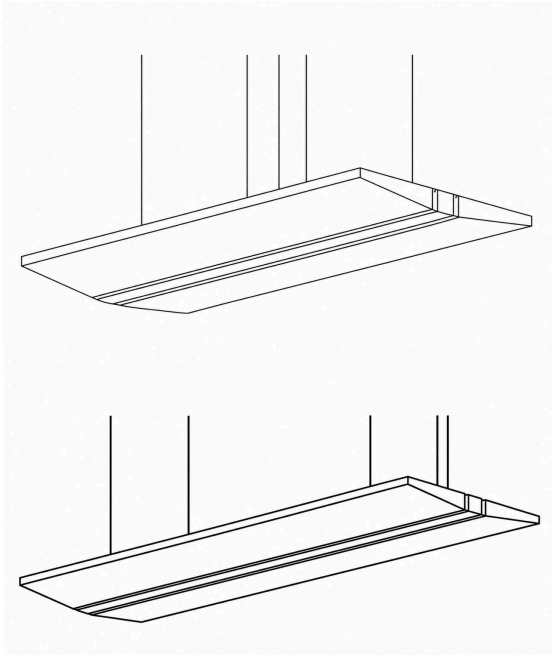

PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-SRF-SP-SM-S-L1-C90-K27-ST-DIM-DALI-WH-WH-FLT-EB

2

MODELS:

-M

DIMENSIONS:

Height - H: 2.25" (5.72 cm)
Width - W: 24" (60.96 cm)
Length - L: 72" (182.88 cm)

LIGHT DISTRIBUTION:

	TOTAL FIXTURE WATTAGE (W)	NOMINAL LUMEN OUTPUT
-L1	14.60W	200
-L2	26.40W	350
-L3	32.30W	450
-L4	38.20W	550
-L5	44.20W	650
-L6	50.20W	750
-L7	56.20W	825
-L8	62.20W	925

-L

DIMENSIONS:

Height - H: 4" (10.16 cm)
Width - W: 48" (121.92 cm)
Length - L: 96" (243.84 cm)

LIGHT DISTRIBUTION:

	TOTAL FIXTURE WATTAGE (W)	NOMINAL LUMEN OUTPUT
-L1	17.10W	200
-L2	31.60W	350
-L3	39.10W	450
-L4	46.80W	550
-L5	54.60W	650
-L6	63.00W	750
-L7	71.40W	825
-L8	80.00W	925



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.



HOW TO ORDER:

Example:

CODE: BY-SRF-SP-SM-S-L1-C90-K27-ST-DIM-
DALI-WH-WH-FLT-EB

3 CRI:

-C80

CRI80

-C90

CRI90

4 CCT:

-K27

2700K

-K30

3000K

-K35

3500K

-K40

4000K

-TW

TUNABLE WHITE

-RGB

RGB

5 SUSPENSION:

-ST

12"—96"

-EXTR

12"—240"

6 DIMMING INTERFACE:

-DIM

0-10V 1% DIMMING

-HI-LUME

HI-LUME 1% ECOSYSTEM

-EM

0-10V 1% DIMMING INTEGRATED
EM BATTERY OPTION

7 CONTROL SYSTEM(OPTIONAL):

-DMX

RGB CONTROL

-DALI

DALI CONTROL

8 POWER CORD FINISH:

-WH

WHITE

-BL

BLACK

9 CANOPY FINISH OPTIONS:

-WH

WHITE

-BL

BLACK

-RWH

RECESSED WHITE

-RBL

RECESSED BLACK

PROJECT

SPEC TYPE

NOTES



WE WELCOME ALL CUSTOM ORDERS

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

WWW.BYIBA.COM

OUTDOOR

TECHNICAL

DECORATIVE

Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646

Updated 09/09/2026



PROJECT

SPEC TYPE

NOTES

HOW TO ORDER:

Example:

CODE: BY-SRF-SP-SM-S-L1-C90-K27-ST-DIM-DALI-WH-WH-FLT-EB

10 ENDCAP FINISH OPTIONS:

- FLT

-WOW

-WPC

-BPC
- FELT SHADE COLOR

WHITE OAK WOOD

WHITE POWDER COAT

BLACK POWDER COAT



11 FELT FINISH OPTIONS:

COLOR

- EB

-NF

-CA

-SLT

-ML

-STL

-AR

-NI

-ZN

-LC

-AD

-DK

-STB

EBONY

NIGHTFALL

CAST

SILT

MINERAL

STEEL

ARMOR

NICKEL

ZINC

LILAC

ADMIRAL

DUSK

STEELBLUE



-EM

-BU

-CI

-JP

-SF

-OCH

-MU

-AS

-CT

-PT

-DW

-DN

-VL

EMERALD

BURGUNDY

CINNAMON

JASPER

SAFFRON

OCHRE

MUSTARD

ARIES

CITRINE

PLATINUM

DRIFTWOOD

DUNE

VANILLA


- PATTERN
- DWA

-IOK

-WA

-BA

WALNUT

IRON OAK

CARMEL OAK

RICH BAMBOO


-
- WE WELCOME ALL CUSTOM ORDERS
- Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
- ©2026 All Rights Reserved
- WWW.BYIBA.COM
- OUTDOOR

TECHNICAL

DECORATIVE
- Contact Us:

sales@gordonbullard.com

www.byiba.com

1 877-964-4646
- Updated 09/09/2026